




2012 CATALOG

PENN PRINT CAMPAIGN

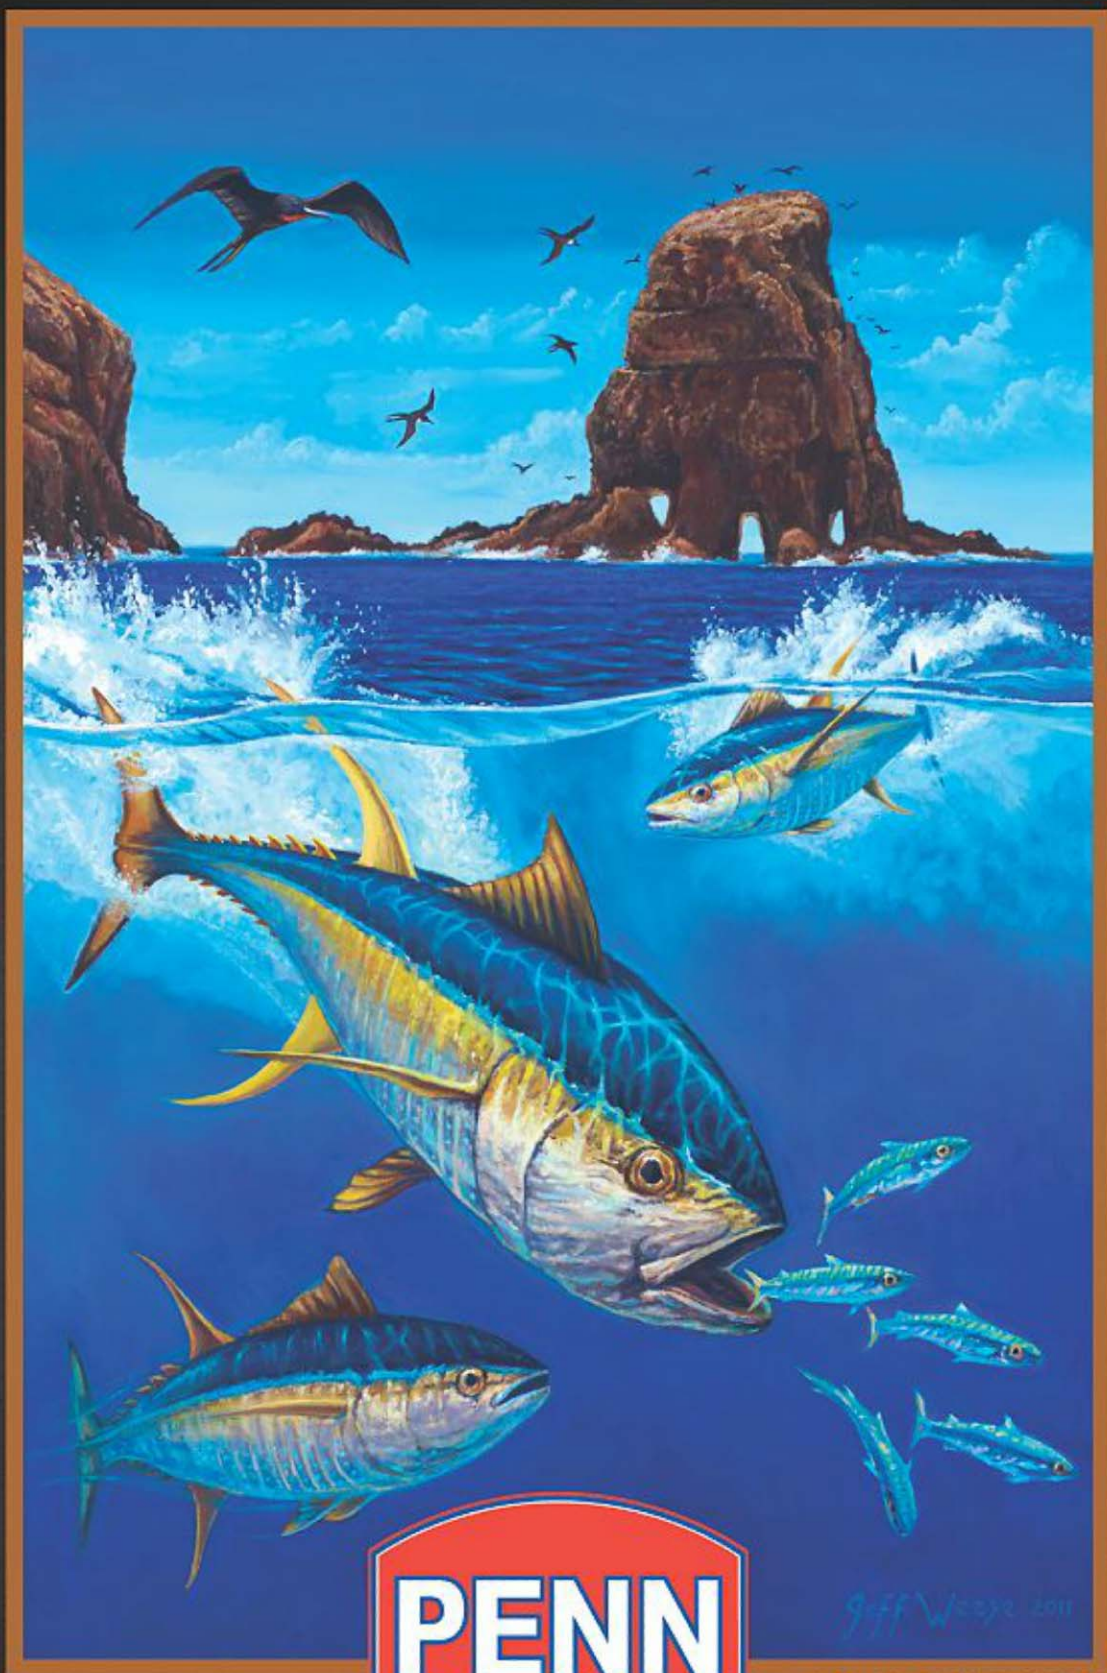

COMING OUT ON
THE OTHER SIDE OF A FIGHT
IS ALL ABOUT BEING
PROPERLY ARMED.
IN OPEN WATER, INSHORE
OR STANDING ON A PIER,
YOU NEVER KNOW WHEN
YOU'LL FIND YOURSELF
IN THE FIGHT OF YOUR LIFE.
**BE READY.
BE VICTORIOUS.**
PENN
LET THE BATTLE BEGIN™
pennreels.com



IT'S A MATCH
FOR REELS TWICE ITS SIZE.
AND IT'S NOT AFRAID
TO TAKE A BEATING.
IT WANTS A CHALLENGE.
**A DUEL.
A WAR.**
IT'S LAUNCHING FROM A FIGHT.
THE ONLY QUESTION IS:
ARE YOU?
INTRODUCING THE NEW FATHOM™ STAR DRAG
PENN® is back with the longest Star Drag. Its innovative VersaGear™ and
Live Sprites™ make it highly adaptable, amazingly castable and ready
for the fight of your life.
PENN
LET THE BATTLE BEGIN™
pennreels.com



IT'S A BRAWLER.
A STREET FIGHTER.
IT'S PACKING EVERYTHING YOU NEED
TO THROW DOWN.
IF YOU GET ABOUT A THUNDER BUCKS
IN YOUR POCKET,
PICK ONE UP AND THE TIDAL OF YOU
**CAN GET INTO SOME
SERIOUS TROUBLE.**
INTRODUCING THE NEW BATTLE™ SPINNING REEL
PENN® is back with the Battle, loaded with features and capabilities
you'll find in reels twice its price. It's ready to mix it up with anything
that swims.
PENN
LET THE BATTLE BEGIN™
pennreels.com



THE FATHOM FAMILY
KNOWS A THING OR TWO
ABOUT POWER.
STRENGTH IS IN THEIR DNA.
**AND WITH A FULL
METAL BODY**
THEY WERE BRED
FOR BATTLE.
SO BRING IT.
PENN
LET THE BATTLE BEGIN™
FATHOM™ STAR DRAG AND FATHOM™ LEVEL WIND FROM PENN®
Whether it's the castability of the Star Drag or the cranking power of the Level Wind, the
Fathom family of PENN reels has your back. Featuring durable, full metal bodies and our
Versa-Drag system, these reels are ready for a fight.
pennreels.com
Get the low down on your gear at
<http://gettyimages.com>

Contents

International Reels	2-3
Custom Shop	4-5
Conventional Reels	6-19
Baitcast Reels	19
Spinning Reels	20-25
International Rods	26
Rods	26-35
Combos	36-39
Downrigger & Accessories	40
Neoprene Covers	40
Penn Lube	41
Master Capacity Chart	42-44
Rods to Reel Combination Chart	45

On The Cover: "Alijos Carnage" Original Oil Painting

Jeff Weese is a nature artist who grew up in Ontario, Canada. He began painting with watercolor and acrylics at the age of eighteen, and studied fine art at St. Lawrence College in Kingston, Ontario. Jeff now resides in South Carolina, where he paints scenes depicting the beauty of the low country and beaches of South Carolina. Known for his attention to detail and use of light, his oil paintings are well received in his adopted country.

His latest work for the Penn catalog cover, "Alijos Carnage", shows the beauty and power of yellowfin tuna in the Pacific Ocean off the coast of the Baja Peninsula feasting on green-back mackerel, as a flock of frigate birds impatiently wait for their turn.



For more information regarding availability of paintings, prints or commissions contact Jeff Weese at jweese001@sc.rr.com

NEW CONVENTIONAL MODEL NUMBER SYSTEM

Ever notice that every manufacturer uses a different model number system? Sometimes it's difficult to understand how much line a reel holds just by looking at the model number...until now. Going forward our new PENN conventional reels will utilize a model number system that correlates to the 300 yard monofilament line capacity of the reel. For example, a 30 size reel will hold roughly 300 yards of 30 lb Berkley® Big Game monofilament. A 50 size reel will hold roughly 300 yards of 50 lb Berkley® Big Game monofilament. Reels that will not follow this structure are International® and Senator® reels.



REEL FEATURES



Line capacities on spool are marked at 1/3rd, 2/3rd and full capacity.



Switchblade harness lugs flip up with the tip of your finger or drop flush with the reel to eliminate snagged lines.



Both the spool and spindle may rotate independently from the drive train and frame thereby reducing friction during free spool and eliminating binding during the retrieve.



Provides 16 magnetic brake settings for controlled casting.



The turn of a dial provides the greatest range of bait clicker settings ever.



Sets the bait clicker to heavy, light or off positions.



Easy Access System allows maintenance hatch to be lowered to access key internal parts for lubrication.



A proprietary metal that resists dents and scratches.



No backing needed because the rubber gasket keeps superline from slipping.



Braid Ready to handle the strain that braided lines put on a reel.



Eliminates rotor backlash for instant hook sets.



Full metal body and sideplate keep precise gear alignment under heavy loads.



ISP (Integrated Side Plate) design ensures proper gear alignment under heavy loads.



Push-To-Turn™ preset knob eliminates accidental changes to the drag setting.



Quick-Shift™ 2-speed system easily shifts into high or low gear.



Versa-Drag™ system allows for multiple drag settings for various fishing conditions.



Dura-Drag™ washers virtually eliminate hesitation, even under extreme drag settings.



HT-100™ drag washers provide smooth drag under heavy loads.



The perfect oscillation for an extremely even line lay.



Techno-balanced™ rotor gives smooth retrieves.

ROD FEATURES



Woven carbon fiber is applied as an outer shield to protect rod blanks and guide wraps.



A unique twist of strands of carbon fiber create a scale like pattern.



Our Torque grips are uniquely shaped to eliminate the rod from rotating while under pressure.



TRC™ - Torque Rod Construction provides a spiral wrapped graphite core for added strength.



Hollow Blank

Solid Tip

Tip section of the rod is solid and not hollow to virtually eliminate breakage.

INTERNATIONAL V • VS



Push-to-Turn™



Braid Ready™



Ultimate Adjustable Clicker™



INTERNATIONAL V • VS

Model	Material #	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag @ Strike	Max Drag @ Full	Gear Ratio High/Low	Line Retrieve (in)High/Low	Weight (oz)
12V	1206024	875/12 • 775/15 • 525/20	1425/20 • 1075/30 • 750/50	4	9 lbs	13 lbs	5.9:1	45	31
12VS	1186238	875/12 • 775/15 • 525/20	1425/20 • 1075/30 • 750/50	4	11 lbs	17 lbs	5.3:1 / 3.3:1	40/25	32
16VS	1151027	1025/16 • 700/20 • 480/30	1000/50 • 825/65 • 700/80	4	11 lbs	28 lbs	5.3:1 / 2.0:1	45/17	41
30VW	1151044	900/30 • 550/50 • 480/60	1525/65 • 1325/80 • 1125/100	4	23 lbs	30 lbs	3.8:1	37	57
30VSW	1151030	900/30 • 550/50 • 480/60	1525/65 • 1325/80 • 1125/100	4	23 lbs	30 lbs	3.8:1 / 1.6:1	37/15	58
50VW	1151047	825/50 • 725/60 • 525/80	2000/80 • 1700/100 • 1425/130	4	28 lbs	45 lbs	3:1	34	74
50VSW	1151033	825/50 • 725/60 • 525/80	2000/80 • 1700/100 • 1425/130	4	28 lbs	45 lbs	3.1:1 / 1.3:1	34/14	75
70VS	1151036	650/80 • 525/100 • 420/130	1750/130 • 1600/150 • 1300/200	4	35 lbs	45 lbs	3.1:1 / 1.4:1	39/18	100
80VSW	1151038	950/80 • 875/100 • 700/130	2900/130 • 2600/150 • 2125/200	6	40 lbs	51 lbs	3.0:1 / 1.4:1	43/19	111

• TOPSHOT capacities are located in the Master Capacity Chart.

- Full metal body and sideplates keep precise gear alignment under heavy loads
- Quick-Shift™ 2-speed system easily shifts into high or low gear (only two speeds)
- Push-To-Turn™ preset knob eliminates accidental changes to the drag
- Dura-Drum™ washers virtually eliminate hesitation, even under extreme drag settings
- Ratcheted drag lever prevents "drag creep" caused by hours of trolling and vibrations

- Shielded stainless steel ball bearings
- Stainless steel reel stand
- Braid Ready to handle the strain that braided lines put on a reel
- 70VS and 80VSW have titanium handle blank
- Ultimate Adjustable Clicker on 12V & 12VS only



ULTIMATE ADJUSTABLE CLICKER

The Ultimate Adjustable Clicker allows for the greatest range of bait clicker settings in the industry. Simply turn the dial clockwise to increase the tension for fishing bigger baits or turn it counter clockwise to lighten the tension for smaller baits or to detect lighter strikes. Available on 12V, 12VS & 12VSX models only.

INTERNATIONAL VSX

Model	Material #	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag @ Strike	Max Drag @ Full	Gear Ratio High/Low	Line Retrieve (in)High/Low	Weight (oz)
12VSX	1187309	360/30 • 300/40 • 220/50	750/50 • 625/65 • 525/80	4	24 lbs	36 lbs	5.0:1 / 2.5:1	38/19	34
16VSX	1151028	1075/16 • 700/20 • 480/30	825/65 • 700/80 • 600/100	4	30 lbs	42 lbs	4.3:1 / 1.7:1	36/15	41
30VSX	1151031	525/30 • 320/50 • 280/60	775/80 • 650/100 • 550/130	4	38 lbs	50 lbs	3.8:1 / 1.6:1	37/15	60
50VSX	1151035	500/50 • 440/60 • 330/80	875/130 • 775/150 • 650/200	4	44 lbs	56 lbs	3.1:1 / 1.3:1	34/14	76
130VSX	1151040	975/130 • 850/150 • 525/200	3650/150 • 2975/200 • 2475/250	6	80 lbs	100 lbs	2.2:1 / 1.2:1	38/21	176

• TOPSHOT capacities are located in the Master Capacity Chart.

- Full metal body and sideplates keep precise gear alignment under heavy loads
- Quick-Shift™ 2-speed system easily shifts into high or low gear
- Push-To-Turn™ preset knob eliminates accidental changes to the drag
- Dura-Drag™ washers virtually eliminate hesitation, even under extreme drag settings
- Ratcheted drag lever prevents "drag creep" caused by hours of trolling and vibrations

- Shielded stainless steel ball bearings
- Stainless steel reel stand
- Braid Ready to handle the strain that braided lines put on a reel
- 130VSX has titanium handle blank
- Ultimate Adjustable Clicker on 12VSX only

PENN CUSTOM SHOP

The PENN Custom Shop website has been upgraded

with new features and an improved experience for building anglers' reels. The improved design makes crafting the perfect reel easier than ever with click to change technology when selecting color and engraving options. Instantly design the reel in-store, or your customer can send it by email to contact you directly about placing an order. PENN Custom Shop reel designs can even be shared on Facebook®. With over a half million combinations, there is a custom design for every angler!



New engravings available

The PENN Custom Shop has been upgraded with more engraving options than ever before. Now select from a total of 12 game fish, the PENN logo or the American flag on any International® series and Torque™ Star Drag reels. Then custom engrave a name, boat, or port of call for a design truly unique to the angler. Mix and match from seven eye-catching colors to design a reel that fits the angler's distinctive style or boat design. Engraved text is also available in Gold, Black or Silver.




PENN CUSTOM SHOP



International V Series are here

All PENN International V Series Big Game reels consist of four separate parts that can be anodized to match any style. If you have ever wished you could change the colors on a PENN reel to match a boat, now you have that option. You can even mix colors on the reel to make it truly customized. A maximum of any two colors may be chosen per reel.

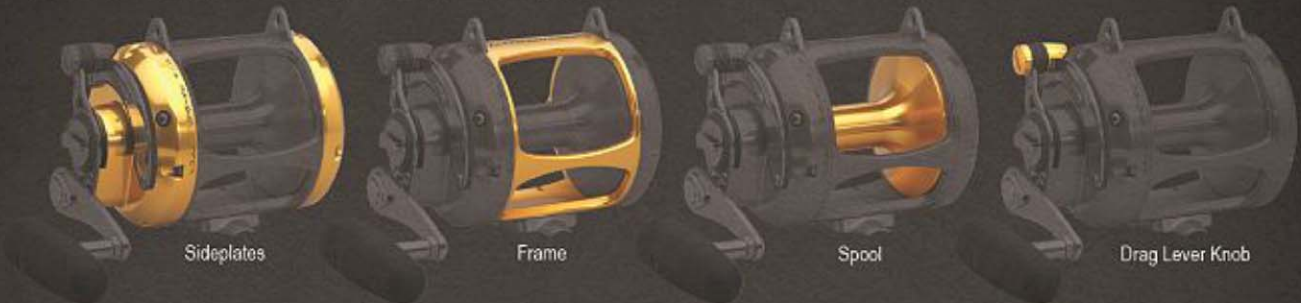

Torque Star Drag coming soon!

The redesigned and lighter Torque Star Drag will be available soon in the PENN Custom Shop. All the engraving and color options are available in this series plus anglers can select from black or silver trim options. Trim includes reel stand, star drag, eccentric lever, spool tension knob, handle arm, screws and clicker button.



TORQUE™ STAR DRAG



NEW

NEW GOLD
COLOR



TORQUE STAR DRAG

Model	Material #	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag	Gear Ratio	Line Retrieve (in)	Weight (oz)
TRQ12G	1236676	360/10 • 260/12 • 230/15	525/15 • 420/20 • 320/30	7+1	25 lbs	6.0:1	28	16.9
TRQ12B	1206071	360/10 • 260/12 • 230/15	525/15 • 420/20 • 320/30	7+1	25 lbs	6.0:1	28	16.9
TRQ15G	1236677	320/12 • 280/15 • 190/20	500/20 • 380/30 • 270/50	7+1	25 lbs	6.0:1	28	17.1
TRQ15B	1206072	320/12 • 280/15 • 190/20	500/20 • 380/30 • 270/50	7+1	25 lbs	6.0:1	28	17.1
TRQ25G	1236678	320/20 • 290/25 • 220/30	650/30 • 450/50 • 370/65	7+1	25 lbs	6.0:1	32	19.0
TRQ25B	1206073	320/20 • 290/25 • 220/30	650/30 • 450/50 • 370/65	7+1	25 lbs	6.0:1	32	19.0
TRQ30G	1236679	440/20 • 300/30 • 250/40	625/50 • 500/65 • 440/80	7+1	25 lbs	6.0:1	40	21.0
TRQ30B	1206074	440/20 • 300/30 • 250/40	625/50 • 500/65 • 440/80	7+1	25 lbs	6.0:1	40	21.0
TRQ40G	1236680	350/30 • 300/40 • 220/50	725/50 • 600/65 • 525/80	7+1	25 lbs	6.0:1	40	21.7
TRQ40B	1206075	350/30 • 300/40 • 220/50	725/50 • 600/65 • 525/80	7+1	25 lbs	6.0:1	40	21.7

• **TOPSHOT capacities are located in the Master Capacity Chart.**

- Machined and anodized aluminum body and sideplates
- Lightweight forged aluminum spool
- Stainless steel main and pinion gear
- Live spindle with free floating spool
- Versa-Drum™ system with HT-100™ washers

- 7 sealed stainless steel ball bearings
- Instant anti-reverse bearing with silent back up ratchet
- Three Position Adjustable Bait Clicker
- Switchblade Harness Lugs on 40 size only

TORQUE™ STAR DRAG • VERSA-GEAR™



VERSA-HANDLE SYSTEM - POWER



VERSA-HANDLE SYSTEM - SPEED



Are you bottom fishing or trolling for kings? Are you looking for power or speed? Our Versa-Handle system allows the angler to choose how long the handle should be in less than a minute, tools are included with each reel. Assemble the reel in the long position for more power, assemble in the short position for more speed, your choice.



VERSA-GEAR

The TORQUE star drag comes from the factory with a 6.0:1 gear ratio for rapid line retrieve. However you may find the need for a lower gear ratio in certain fishing situations, for example, bottom fishing where power is more important than speed. For these situations we offer our Versa-Gear system. With this system you can easily purchase and install a 5.4:1 or 4.8:1 ratio. See chart below for line retrieve.

Model	Material #	Gear Ratio	Line Retrieve (in)				
			TRQ12	TRQ15	TRQ25	TRQ30	TRQ40
TRQ54GEAR	1236682	5.4:1	25	25	29	36	36
TRQ48GEAR	1236681	4.8:1	23	23	26	32	32



TORQUE LEVER DRAG • INTERNATIONAL BAITCAST



TORQUE LEVER DRAG

Model	Material #	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag @ Strike	Max Drag @ Full	Gear Ratio	Line Retrieve (in)High/Low	Weight (oz)
TRQ100LD	1151052	240/17 • 190/20 • 170/25	310/40 • 270/50 • 220/65	4	40 lbs	50 lbs	6.2:1	32	28.8
TRQ300LD	1151053	320/30 • 270/40 • 200/50	550/65 • 470/80 • 400/100	4	40 lbs	50 lbs	6.4:1	48	41.4

• TOPSHOT capacities are located in the Master Capacity Chart.

- Full metal body and sideplate keep precise gear alignment under heavy loads
- Versa-Drag™ system allows for multiple drag settings for various fishing conditions
- HT-100™ drag washers provide smooth drag under heavy loads
- Ratcheted drag lever prevents "drag creep" caused by hours of trolling and vibrations
- Push-To-Turn™ preset knob eliminates accidental changes to the drag
- Disengaging pinion for superior free spool
- 4 shielded stainless steel ball bearings
- Stainless steel reel stand
- Braid Ready to handle the strain that braided lines put on a reel

INTERNATIONAL BAITCAST

Model	Material #	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag @ Strike	Max Drag @ Full	Gear Ratio	Line Retrieve (in)High/Low	Weight (oz)
965	1151055	210/12 • 190/15 • 160/17	420/15 • 340/20 • 260/30	2+1	10 lbs	-	4.7:1	19	13
975	1151056	270/12 • 240/15 • 210/17	440/20 • 330/30 • 270/40	2+1	12 lbs	-	4.5:1	20	15
975CS	1151057	270/12 • 240/15 • 210/17	440/20 • 330/30 • 270/40	2+1	12 lbs	-	4.5:1	20	15
975CSLD	1151058	250/12 • 220/15 • 190/17	410/20 • 300/30 • 250/40	5+1	10 lbs	12 lbs	4.4:1	20	17
975LD	1151059	250/12 • 220/15 • 190/17	410/20 • 300/30 • 250/40	5+1	10 lbs	12 lbs	4.4:1	20	18

• TOPSHOT capacities are located in the Master Capacity Chart.

- Full metal body and sideplates keep precise gear alignment under heavy loads
- HT-100™ drag washers provide smooth drag under heavy loads
- 2 shielded stainless steel ball bearings
- Infinite anti-reverse
- Stainless steel reel stand

BAJA SPECIAL®



BAJA SPECIAL

Model	Material #	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag	Gear Ratio	Line Retrieve (in)	Weight (oz)
113HN	1151065	350/30 • 300/40 • 220/50	725/50 • 600/65 • 525/80	6	27 lbs	4.3:1	34	28.8

• **TOPSHOT capacities are located in the Master Capacity Chart.**

- Machined aluminum frame with reinforced sideplates
- Disengaging pinion design for extreme castability
- Stainless steel main and pinion gear
- 6 stainless steel shielded ball bearings
- HT-100™ drag washers provide smooth drag under heavy loads

- "Double Dog" anti-reverse
- Adjustable handle arm design with large fighting grip
- Reversible harness lugs

FATHOM® STAR DRAG



LINE
CAPACITY
RINGS



HT-100™

Braid
Ready



NEW



The revolutionary Live Spindle™ design is the reason the new Fathom Star Drag is the most castable reel in the market place. The improved configuration allows the spool to spin independently of the spindle and pinion gear, which significantly reduces friction experienced from the extreme acceleration of the spool when casting. Other reels using a "fixed spindle" design slow the rotation of the spool and reduce casting distance. Additionally the Live Spindle improves the retrieve of the reel because the spindle and pinion do not need to turn relative to each other during heavy loads, unlike a "fixed spindle" reels that result in a difficult retrieve and erratic drag.

FATHOM STAR DRAG

Model	Material #	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag	Gear Ratio	Line Retrieve (in)	Weight (oz)
FTH12	1238442	360/10 • 260/12 • 230/15	525/15 • 420/20 • 320/30	5+1	25 lbs	6.0:1	28	15.5
FTH15	1238443	320/12 • 280/15 • 190/20	500/20 • 380/30 • 270/50	5+1	25 lbs	6.0:1	28	15.6
FTH25N	1238444	320/20 • 290/25 • 220/30	650/30 • 450/50 • 370/65	5+1	25 lbs	6.0:1	40	17.9
FTN30	1238445	440/20 • 300/30 • 250/40	625/50 • 500/65 • 440/80	5+1	25 lbs	6.0:1	40	18.4
FTH40	1238446	350/30 • 300/40 • 220/50	725/50 • 600/65 • 525/80	5+1	25 lbs	6.0:1	40	18.7

• **TOPSHOT capacities are located in the Master Capacity Chart.**

• Full metal body and sideplates

• Machine-cut marine grade bronze main gear with hardened stainless steel pinion

• Versa-Drag™ system with HT-100™ washers

• Live spindle with free floating spool

• Internally adjustable centrifugal braking system

• Line Capacity Rings

• 5+1 Shielded stainless steel bearing system

• Instant anti-reverse bearing with silent back up ratchet

FATHOM™ LEVEL WIND



LEVEL 1
Light Drag Range
up to 10 lbs. max drag



LEVEL 2
Medium Drag Range up
to 20 lbs. max drag



LEVEL 3
Heavy Drag Range up
to 30 lbs. max drag



By rearranging the sequence of the keyed metal washers and eared HT-100 washers the reel can be set up for fishing a wide range of drag settings without additional parts.

FATHOM LEVEL WIND

Model	Material #	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag	Gear Ratio	Line Retrieve (in)	Weight (oz)
FTH15LW	1206076	320/15 • 280/17 • 220/20	575/20 • 440/30 • 300/50	3+1	30 lbs	4.3:1	24	19.2
FTH20LW	1206089	320/17 • 260/20 • 230/25	675/20 • 500/30 • 350/50	3+1	30 lbs	4.3:1	24	19.5
FTH25LW	1206090	330/20 • 290/25 • 220/30	650/30 • 450/50 • 380/65	3+1	30 lbs	4.3:1	24	20.0
FTH40LW	1206091	390/30 • 330/40 • 240/50	825/50 • 675/65 • 575/80	3+1	30 lbs	4.3:1	34	24.3
FTH60LW	1206092	440/40 • 320/50 • 280/60	900/65 • 775/80 • 650/100	3+1	30 lbs	4.3:1	34	25.1

• **TOPSHOT capacities are located in the Master Capacity Chart.**

- Full metal body and sideplates
- Marine-grade bronze alloy main gear
- Precision-machined stainless steel pinion gear
- Versa-Drag™ system with HT-100™ washers

- 3 Shielded stainless steel ball bearings
- Instant anti-reverse bearing with silent back up ratchet
- Stainless steel TiN coated levelwind system
- Reversible Harness Lugs on 40 & 60 sizes

SQUALL™ LEVER DRAG



LINE
CAPACITY
RINGS

SWITCH
BLADE
LUGS

INFINITE
WR
TIT HAVES

NEW



AVAILABLE IN
LEFT HAND

VERSA-HANDLE SYSTEM - SPEED



VERSA-HANDLE SYSTEM - POWER



Are you bottom fishing or trolling? Are you looking for power or speed? Our Versa-Handle system allows the angler to choose how long the handle should be in less than a minute, tools are included with each reel. Assemble the reel in the long position for more power, assemble in the short position for more speed, your choice.



Function and ergonomics were on top of the list when we designed the Squall Lever Drag reels. Note that the lever drag does not protrude above the frame of the reel. What does this mean to the angler? There is no way for the line to loop over and hang up on the lever of the Squall Lever Drag which could result in a break-off. One less thing to worry about when the line pops out of the clip.



Eliminates the question of how much line you have left when fighting a fish. The three lines on the spool flange let you know when you have 1/3rd, 2/3rd, or a full spool of line. Also if you respool often these lines give you a benchmark for backing your superlines with monofilament which will help eliminate wasted time and line.

SQUALL™ LEVER DRAG



AVAILABLE IN
LEFT HAND



Switchblade™ Harness Lugs give you all the benefits of traditional lugs without the risk of grabbing loose line and potentially breaking off fish. When the lugs are not in use they remain flush with the reel frame, when you need them they easily pop up with the tip of your finger. The other benefit of the proprietary Switchblade harness lugs is basic ergonomics. Let's face it, harness lugs can be uncomfortable when you are palming the reel on the cast or retrieve. If you don't plan to use the lugs then stow them in the down position and you have one of the most ergonomic reels on the market. Included on 50 & 60 sizes only.

SQUALL LEVER DRAG

Model	Material #	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag @ Strike	Max Drag @ Full	Gear Ratio	Line Retrieve (in)High/Low	Weight (oz)
SQL30LD	1206093	390/20 • 350/25 • 260/30	1025/20 • 775/30 • 550/50	5+1	9 lbs	13 lbs	6.1:1	37	18.2
SQL40LD	1206094	490/25 • 360/30 • 300/40	1075/30 • 750/50 • 625/65	5+1	14 lbs	18 lbs	5.1:1	37	20.9
SQL40LDLH	1238641	490/25 • 360/30 • 300/40	1075/30 • 750/50 • 625/65	5+1	14 lbs	18 lbs	5.1:1	37	20.9
SQL50LD	1206095	500/30 • 420/40 • 310/50	1050/50 • 875/65 • 750/80	5+1	15 lbs	20 lbs	4.3:1	35	27.4
SQL60LD	1206096	500/40 • 370/50 • 330/60	1050/65 • 900/80 • 775/100	5+1	20 lbs	30 lbs	4.3:1	35	28.1
SQL60LDLH	1238642	500/40 • 370/50 • 330/60	1050/65 • 900/80 • 775/100	5+1	20 lbs	30 lbs	4.3:1	35	28.1

• TOPSHOT capacities are located in the Master Capacity Chart.

- Lightweight graphite frame and sideplates
- Forged and machined aluminum spool
- High-strength marine grade bronze main and pinion gear
- Dura-Drag™ washers virtually eliminate hesitation, even under extreme drag settings
- Switchblade™ harness lugs
- Ratcheted drag lever prevents "drag creep" caused by hours of trolling and vibrations
- Line Capacity Rings
- 5+1 Shielded stainless steel bearing system
- Instant anti-reverse bearing with silent back up ratchet

SQUALL™ STAR DRAG



GS PERFORMANCE
STAR DRAG

SQUALL & GS PERFORMANCE STAR DRAG

Model	Material #	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag	Gear Ratio	Line Retrieve (in)	Weight (oz)
SQL12	1206097	270/12 • 230/15 • 160/20	525/15 • 430/20 • 320/30	6+1	15 lbs	6.0:1	28	14.4
SQL15	1206098	280/15 • 240/17 • 190/20	500/20 • 380/30 • 270/50	6+1	15 lbs	6.0:1	28	14.6
535	1151089	410/15 • 290/20 • 260/25	750/20 • 575/30 • 470/40	4	9.5 lbs	6.0:1	35	20
545	1151091	380/20 • 340/25 • 250/30	750/30 • 600/40 • 525/50	4	13 lbs	6.0:1	40	23
555	1151093	400/25 • 300/30 • 250/40	725/40 • 625/50 • 525/65	4	11 lbs	5.3:1	36	24

- Lightweight graphite frame
- Machined and anodized aluminum spool
- Externally adjustable magnetic casting brake (SQL12 & SQL15 only)
- High-strength marine grade bronze alloy main gear
- Quick high-speed gear ratio
- Precision-machined stainless steel pinion gear
- Live spindle with free floating spool (SQL12 & SQL15 only)

- Versa-Drag™ system allows for multiple drag settings for various fishing conditions
- Shielded stainless steel ball bearings
- HT-100™ drag washers provide smooth drag under heavy loads
- Stainless steel reel stand
- Counter-balanced handle with oversized paddle knob

SPECIAL SENATOR • SENATOR®



SPECIAL SENATOR

Model	Material #	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag	Gear Ratio	Line Retrieve (in)	Weight (oz)
112H2	1152013	450/20 • 300/30 • 250/40	625/50 • 525/65 • 450/80	2	11 lbs	4.0:1	29	22
113H2	1153838	440/30 • 370/40 • 270/50	925/50 • 750/65 • 650/80	2	20 lbs	3.3:1	26	30
113H2LH*	1153839	440/30 • 370/40 • 270/50	925/50 • 750/65 • 650/80	2	20 lbs	3.3:1	26	30
113H2SP*	1153840	500/35 • 420/46 • 270/61	-	2	20 lbs	3.3:1	26	35
113H2LW*	1153841	490/40 • 360/50 • 310/60	1200/50 • 1000/65 • 875/80	2	20 lbs	3.3:1	26	31
114H2	1187313	450/50 • 390/60 • 290/80	1250/65 • 1075/80 • 925/100	2	22 lbs	2.9:1	28	45
114H2SP*	1187311	825/35 • 700/46 • 450/61	-	2	22 lbs	2.9:1	28	48
114H2LW*	1187312	560/50 • 490/60 • 360/80	1350/80 • 1150/100 • 950/130	2	22 lbs	2.9:1	28	48

• **TOPSHOT** capacities are located in the **Master Capacity Chart**.

* LH - Left Hand • SP - Brass Spool for Wireline • LW - Wide

- Lightweight graphite frame
- Machined and anodized aluminum spool
- Precision-machined stainless steel pinion gear
- High-strength marine grade bronze alloy main gear
- Stainless steel frame rings enhances rigidity to prevent "frame-flex"
- HT-100™ drag washers provide smooth drag under heavy loads
- Multi-disc star drag system for smooth and consistent drag
- 2 shielded stainless steel ball bearings
- Stainless steel reel stand
- Convertible power handle
- Heavy-duty clicker

SENATOR

Model	Material #	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag	Gear Ratio	Line Retrieve (in)	Weight (oz)
113L2	1187314	650/20 • 440/30 • 370/40	760/65 • 660/80 • 560/100	2	19 lbs	2.0:1	16	27
114L2	1187315	725/30 • 450/50 • 390/60	1075/80 • 925/100 • 750/130	2	21 lbs	2.1:1	21	44
115L2	1199904	1150/30 • 700/50 • 625/60	1700/80 • 1450/100 • 1200/130	2	23.5 lbs	2.5:1	28	57
116L	1151086	1500/60 • 1100/80 • 875/100	4100/80 • 3500/100 • 2900/130	2	30 lbs	2.0:1	29	89

- Machined and anodized aluminum spool
- Precision-machined stainless steel pinion gear
- High-strength marine grade bronze alloy main gear
- Stainless steel frame rings enhances rigidity to prevent "frame-flex"
- HT-100™ drag washers provide smooth drag under heavy loads
- 2 Shielded stainless steel ball bearings
- Multi-disc star drag system for smooth and consistent drag
- Stainless steel reel stand
- Convertible power handle
- Heavy-duty clicker

GT LEVEL WIND



GT LEVEL WIND

Model	Mtr # (Box • Clam)	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag	Gear Ratio	Line Retrieve (in)	Weight (oz)
310GT2	1152014 • 1153842	380/12 • 330/15 • 230/20	600/20 • 460/30 • 375/40	2	11 lbs	4.2:1	22	18
310GT2LC*	1152019 Box	380/12 • 330/15 • 230/20	600/20 • 460/30 • 375/40	2	11 lbs	4.2:1	22	19
320GT2	1152015 • 1152024	410/15 • 290/20 • 190/30	775/20 • 575/30 • 400/50	2	12 lbs	4.3:1	25	23
320GT2LC*	1152020 Box	410/15 • 290/20 • 190/30	775/20 • 575/30 • 400/50	2	12 lbs	4.3:1	25	23.5
321GT2	1152017 Box	410/15 • 290/20 • 190/30	775/20 • 575/30 • 400/50	2	12 lbs	4.3:1	25	23
330GT2	1152021 Box	450/20 • 330/30 • 250/40	900/30 • 625/50 • 525/65	2	16 lbs	3.6:1	26	27
340GT2	1187305 Box	650/20 • 440/30 • 370/40	925/50 • 750/65 • 650/80	2	22 lbs	3.3:1	26	35
345GT2	1187306 Box	875/20 • 575/30 • 490/40	1200/50 • 1000/65 • 875/80	2	22 lbs	3.3:1	26	35

* LC - Line Counter

- Lightweight graphite frame
- Machined and anodized aluminum spool
- Built in linecounter for precise depth control (LC models)
- High-strength marine grade bronze alloy main gear

- Precision-machined stainless steel pinion gear
- HT-100™ drag washers provide smooth drag under heavy loads
- Stainless steel level wind
- Stainless steel reel stand

DEFIANCE™ LEVEL WIND & STAR DRAG



LINE
CAPACITY
RINGS

HT-100

Brand
Ready

DEFIANCE LEVEL WIND

Model	Mtr # (Box • Clam)	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag	Gear Ratio	Line Retrieve (in)	Weight (oz)
DFN20LW	1238646 Box	450/12 • 395/15 • 275/20	725/20 • 550/30 • 450/40	4	15 lbs	4.3:1	22	17.8
DFN25LW	1238647 • 1238648	330/20 • 300/25 • 225/30	660/30 • 550/40 • 450/50	4	15 lbs	4.3:1	24	18.8
DFN30	1238651 Box	390/25 • 290/30 • 250/40	850/30 • 700/40 • 600/50	4	15 lbs	6.0:1	39	19.3
DFN40LW	1238649 • 1238650	500/20 • 340/30 • 285/40	800/40 • 700/50 • 580/65	4	15 lbs	3.6:1	26	21.6

- Lightweight graphite frame and sideplates
- Forged, machined, and anodized aluminum spool
- Stainless steel frame rings enhances rigidity to prevent "frame-flex"
- Machine-cut marine grade bronze main gear with hardened stainless steel pinion
- HT-100™ carbon fiber drag washers
- Line Capacity Rings
- 4 Shielded stainless steel bearing system

GRAPH-LITE™ • JIGMASTER®



GRAPH-LITE LEVER DRAG

Model	Material #	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag	Gear Ratio	Line Retrieve (in)	Weight (oz)
GLD20II	1151062	675/20 • 450/30 • 380/40	925/50 • 775/65 • 675/80	4	14 lbs	3.8:1 / 2.0:1	32 / 17	40
GLD30II	1151063	600/30 • 500/40 • 370/50	1025/65 • 875/80 • 750/100	4	17 lbs	3.8:1 / 2.0:1	32 / 17	43
GLD50II	1151064	775/40 • 550/50 • 490/60	1350/80 • 1150/100 • 875/150	4	27 lbs	3.8:1 / 1.7:1	33 / 17	55

• TOPSHOT capacities are located in the Master Capacity Chart.

- Quick-Shift™ 2-speed system easily shifts into high or low gear
- Lightweight graphite frame and sideplates
- Machined and anodized aluminum spool
- Machine-cut stainless steel gears
- HT-100™ drag washers provide smooth drag under heavy loads
- 4 shielded stainless steel ball bearings
- Stainless steel reel stand
- Braid Ready to handle the strain that braided lines put on a reel

JIGMASTER

Model	Mtr # (Box • Clam)	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag	Gear Ratio	Line Retrieve (in)	Weight (oz)
500L	1152043 • 1186134	450/20 • 300/30 • 250/40	900/30 • 625/50 • 525/65	BUSHING	15 lbs	4.0:1	25	22

• TOPSHOT capacities are located in the Master Capacity Chart.

- Lightweight, one-piece, open-top graphite frame
- Quick take-apart frame makes it easy to change spools with different line weights
- Lightweight graphite frame
- High-strength marine grade bronze alloy main gear
- Precision-machined stainless steel pinion gear
- HT-100™ drag washers provide smooth drag under heavy loads
- Stainless steel reel stand
- Counter-balanced handle with oversized paddle knob

LEVELWIND • SARGUS® BAITCAST • PURSUIT BAITCAST



LEVEL WIND

Model	Mtr # (Box • Clam)	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag	Gear Ratio	Line Retrieve (in)	Weight (oz)
9M	1152028 • 1151106	250/15 • 220/17 • 180/20	470/20 • 350/30 • 240/50	BUSHING	10 lbs	3.4:1	16	13
209M	1152031 • 1152036	360/17 • 290/20 • 190/30	575/30 • 400/50 • 330/65	BUSHING	10 lbs	3.2:1	19	19
209MLH*	1152033 Box	360/17 • 290/20 • 190/30	575/30 • 400/50 • 330/65	BUSHING	10 lbs	3.2:1	19	19
209LC*	1152038 Box	360/17 • 290/20 • 190/30	575/30 • 400/50 • 330/65	BUSHING	10 lbs	3.2:1	19	19
309M	1152034 • 1186135	450/20 • 300/30 • 250/40	625/50 • 525/65 • 450/80	BUSHING	15 lbs	2.8:1	20	23

* LH - Left Hand • LC - Line Counter

- Machined and anodized aluminum spool
- Machine cut brass main gear
- Precision-machined stainless steel pinion gear

- HT-100™ drag washers provide smooth drag under heavy loads
- Stainless steel reel stand
- Counter-balanced handle with oversized paddle knob

SARGUS & PURSUIT BAITCAST

Model	Material #	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag	Gear Ratio	Line Retrieve (in)	Weight (oz)
SAR64LP	1152012	200/12 • 170/14 • 115/17	310/15 • 200/20 • 180/30	6+1	11.5 lbs	6.4:1	27	9.5
PUR64LP	1152011	200/12 • 170/14 • 115/17	310/15 • 200/20 • 180/30	5+1	11.5 lbs	6.4:1	27	9

• **TOPSHOT** capacities are located in the Master Capacity Chart.

- Corrosion resistant aluminum frame and gear cover
- Machined and anodized aluminum spool
- Machine cut brass main gear
- HT-100™ drag washers provide smooth drag under heavy loads
- 5 Shielded stainless steel ball bearings

- Infinite anti-reverse
- Internally adjustable centrifugal braking system
- Braid Ready to handle the strain that braided lines put on a reel
- SARGUS has externally adjustable magnetic brake control

TORQUE™ SPINNING



TORQUE SPINNING

Model	Material #	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag	Gear Ratio	Line Retrieve (in)	Weight (oz)
TRQS5G	1187639	340/12 • 300/15 • 210/20	550/20 • 400/30 • 290/50	7+1	38 lbs	5.9:1	38	19.9
TRQS5B	1189214	340/12 • 300/15 • 210/20	550/20 • 400/30 • 290/50	7+1	38 lbs	5.9:1	38	19.9
TRQS5BBL	1206099	340/12 • 300/15 • 210/20	550/20 • 400/30 • 290/50	7+1	38 lbs	5.9:1	38	19.3
TRQS7G	1187308	490/15 • 340/20 • 300/25	470/50 • 390/65 • 340/80	7+1	41 lbs	5.1:1	40	26.5
TRQS7B	1189213	490/15 • 340/20 • 300/25	470/50 • 390/65 • 340/80	7+1	41 lbs	5.1:1	40	26.5
TRQS7BBL	1206101	490/15 • 340/20 • 300/25	470/50 • 390/65 • 340/80	7+1	41 lbs	5.1:1	40	26.7
TRQS9G	1187307	490/20 • 440/25 • 330/30	575/65 • 490/80 • 425/100	7+1	50 lbs	5.1:1	50	28.5
TRQS9B	1189212	490/20 • 440/25 • 330/30	575/65 • 490/80 • 425/100	7+1	50 lbs	5.1:1	50	28.5
TRQS9BBL	1206102	490/20 • 440/25 • 330/30	575/65 • 490/80 • 425/100	7+1	50 lbs	5.1:1	50	28.9

• **TOPSHOT** capacities are located in the Master Capacity Chart.

Model # - G - denotes gold/silver cosmetic, B - denotes black/gold cosmetic, BLS - Bailless version

- Full metal body
- One piece machined aluminum frame
- Forged and machined aluminum spool, sideplates, and one piece handle arm
- Fully sealed gearbox and drag system
- Oversize HT-100 Versa-Drag system
- Integral clutch sleeve eliminates any back play during hook set
- 7 sealed stainless steel ball bearings
- Machine-cut marine grade bronze main gear
- Hardened stainless steel pinion gear
- High strength 100% stainless steel bail system
- Innovative bail trip switch allows the angler to choose between manual and auto mode

CONQUER™ SPINNING

The EAS™ (Easy Access System) is the most innovative maintenance feature ever introduced in a spinning reel. By simply backing out one screw on the stem of the reel, the rear hatch opens and gives full access to the gearbox. Now you are able to grease gears and oil bearings in a matter of seconds. All parts are contained within the gear box so you won't have to worry about any parts falling out, which makes this system extremely easy to use. The EAS™ makes maintaining your reel easy, and the more you maintain your reels the longer they'll last.

EAS™



EAS™

ETERNAL ALLOY™

SUPERLINE™

HT-100™

Braid Ready

WR

Leveline™



CONQUER SPINNING

Model	Material #	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag	Gear Ratio	Line Retrieve (in)	Weight (oz)
CQR2000	1186234	250/4 • 185/6 • 130/8	250/8 • 210/10 • 180/15	10+1	12 lbs	5.1:1	28	9.9
CQR4000	1186235	260/8 • 200/10 • 165/12	280/15 • 180/20 • 140/30	10+1	19 lbs	5.8:1	32	11.1
CQR5000	1186236	250/12 • 190/15 • 170/17	350/20 • 270/30 • 220/40	10+1	22 lbs	4.8:1	31	14.6
CQR7000	1186237	250/15 • 210/17 • 170/20	325/30 • 280/40 • 250/50	10+1	32 lbs	4.8:1	37	18.1
CQR8000	1206103	390/17 • 310/20 • 270/25	600/30 • 420/50 • 350/65	10+1	32 lbs	4.7:1	40	23.4

- EAS™ - Easy Access System allows maintenance hatch to be lowered to access key internal parts for lubrication
- Eternal Alloy™ - The spool lip is made from a proprietary metal that resists dents and scratches, which maintains casting distance over the life of the reel
- Superline Spool™ - No backing needed because of the rubber gasket keeps superline from slipping
- One-piece machined aluminum gear box

- Forged, machined, and anodized aluminum spool
- Machine-cut alloy main gear
- HT-100™ drag washers provide smooth drag under heavy loads
- 10 shielded stainless steel ball bearings
- Infinite anti-reverse
- Braid Ready to handle the strain that braided lines put on a reel
- Friction trip ramp prevents premature bail trip when casting

SLAMMER® SPINNING



HT-100™

Braid
Ready

Techno-
balanced™

Penn
Leveline®

Live Liner



SLAMMER SPINNING

Model	Material #	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag	Gear Ratio	Line Retrieve (in)	Weight (oz)
260	1152048	290/6 • 190/8 • 160/10	320/10 • 240/15 • 190/20	5+1	11 lbs	5.1:1	25	12.2
360	1152049	290/8 • 240/10 • 180/12	470/10 • 350/15 • 290/20	5+1	10 lbs	5.1:1	28	12.9
460	1152050	320/10 • 240/12 • 210/15	470/15 • 380/20 • 290/30	5+1	14 lbs	4.6:1	27	19.4
460L*	1187640	320/10 • 240/12 • 210/15	470/15 • 380/20 • 290/30	5+1	14 lbs	4.6:1	27	19.7
560	1152051	310/12 • 270/15 • 190/20	500/20 • 380/30 • 260/50	5+1	15 lbs	4.6:1	30	19.9
560L*	1152054	310/12 • 270/15 • 190/20	500/20 • 380/30 • 260/50	5+1	15 lbs	4.6:1	30	20.7
760	1152052	340/20 • 300/25 • 230/30	675/30 • 470/50 • 390/65	6+1	20 lbs	4.7:1	38	26.8
760L*	1152055	340/20 • 300/25 • 230/30	675/30 • 470/50 • 390/65	6+1	20 lbs	4.7:1	38	28

* L - Live Liner feature for live bait fishing

- Full metal body and sideplate keep precise gear alignment under heavy loads
- Machined and anodized aluminum spool
- Machine-cut alloy main gear
- Triple-supported and oversized stainless steel main shaft for uncompromising strength and alignment
- Oversized HT-100™ drag washers provide smooth drag under heavy loads

- Shielded stainless steel ball bearings
- Infinite anti-reverse
- Techno-balanced™ rotor gives smooth retrieves
- Penn Leveline® wrap system
- Braid Ready to handle the strain that braided lines put on a reel
- Machined and anodized aluminum handle with soft touch knob

SPINFISHER® SSg & SSm SPINNING



SPINFISHER SSg SPINNING

Model	Mtr # (Box • Clam)	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag	Gear Ratio	Line Retrieve (in)	Weight (oz)
420SSg	1152056 • 1152063	185/2 • 150/4 • 120/6	180/6 • 150/8 • 130/10	5+1	6.5 lbs	5.3:1	21	7.8
430SSg	1152057 • 1152064	300/4 • 240/6 • 160/8	300/8 • 260/10 • 200/15	5+1	7 lbs	5.1:1	26	9.8
440SSg	1152058 • 1152065	260/8 • 220/10 • 160/12	420/10 • 320/15 • 260/20	5+1	10 lbs	5.1:1	29	14.3
450SSg	1152060 • 1152066	300/10 • 220/12 • 190/15	440/15 • 360/20 • 270/30	5+1	13 lbs	4.6:1	28	15.6
550SSg	1152062 • 1152067	370/10 • 270/12 • 240/15	550/15 • 440/20 • 325/30	5+1	15 lbs	4.6:1	29	15.9

- Lightweight graphite frame and sideplate
- Machined and anodized aluminum spool
- Machine-cut alloy main gear
- Stainless steel main shaft
- HT-100™ drag washers provide smooth drag under heavy loads

- 5 shielded stainless steel ball bearings
- Infinite anti-reverse
- Techno-balanced™ rotor gives smooth retrieves
- Penn Leveline® wrap system
- Machined and anodized aluminum handle with soft touch knob

SPINFISHER SSm SPINNING

Model	Material #	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag	Gear Ratio	Line Retrieve (in)	Weight (oz)
650SSm	1152068	360/12 • 320/15 • 220/20	575/20 • 440/30 • 300/50	5+1	10 lbs	4.7:1	34	24
750SSm	1152069	420/15 • 290/20 • 260/25	575/30 • 400/50 • 340/65	5+1	11 lbs	4.6:1	36	25.7
850SSm	1152071	380/20 • 340/25 • 250/30	750/30 • 525/50 • 440/65	5+1	11 lbs	4.6:1	40	27.1
950SSm	1152072	450/25 • 340/30 • 290/40	700/50 • 575/65 • 500/80	5+1	15 lbs	4.2:1	38	34.5

- Full metal body and sideplate keep precise gear alignment under heavy loads
- Machined and anodized aluminum spool
- Machine-cut alloy main gear
- Stainless steel main shaft
- HT-100™ drag washers provide smooth drag under heavy loads
- 5 shielded stainless steel ball bearings

- Infinite anti-reverse
- Techno-balanced™ rotor gives smooth retrieves
- Penn Leveline® wrap system
- Machined and anodized aluminum handle with soft touch knob
- Oversized ergonomic power knob on 850SSm & 950SSm

BATTLE™ SPINNING • SARGUS® SPINNING



BATTLE SPINNING

Model	Material #	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag	Gear Ratio	Line Retrieve (in)	Weight (oz)
BTL1000	1238652	180/2 • 115/4 • 80/6	160/6 • 130/8 • 115/10	6+1	7 lbs	5.2:1	20	7.9
BTL2000	1206104	260/4 • 210/6 • 140/8	260/8 • 225/10 • 170/15	6+1	7 lbs	6.2:1	29	9.6
BTL3000	1206106	250/6 • 170/8 • 140/10	275/10 • 205/15 • 170/20	6+1	10 lbs	6.2:1	31	11.6
BTL4000	1206107	280/8 • 230/10 • 170/12	335/15 • 275/20 • 205/30	6+1	13 lbs	6.2:1	34	12.6
BTL5000	1206108	250/12 • 220/15 • 190/17	405/20 • 305/30 • 250/40	6+1	20 lbs	5.6:1	37	20.3
BTL6000	1206109	320/15 • 280/17 • 220/20	445/30 • 365/40 • 310/50	6+1	20 lbs	5.6:1	39	21.8
BTL7000	1206110	390/17 • 310/20 • 280/25	505/40 • 430/50 • 360/65	6+1	25 lbs	5.3:1	39	27.8
BTL8000	1206111	390/20 • 350/25 • 260/30	550/50 • 450/65 • 390/80	6+1	25 lbs	5.3:1	41	29.2

- Full metal body and sideplate keep precise gear alignment under heavy loads
- Superline Spool™ - No backing needed because of the rubber gasket keeps superline from slipping
- Machined and anodized aluminum spool
- HT-100™ drag washers provide smooth drag under heavy loads

- Stainless steel main shaft
- 6 sealed stainless steel ball bearings
- Infinite anti-reverse
- Techno-balanced™ rotor gives smooth retrieves
- Machined and anodized aluminum handle with soft touch knob

SARGUS SPINNING

Model	Mtr # (Box • Clam)	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag	Gear Ratio	Line Retrieve (in)	Weight (oz)
SG1000	1203159 Box	180/2 • 115/4 • 80/6	160/6 • 130/8 • 115/10	5+1	7 lbs	5.2:1	20	7.8
SG2000	1152118 • 1152125	260/4 • 210/6 • 140/8	260/8 • 225/10 • 170/15	5+1	7 lbs	6.2:1	29	9.1
SG3000	1152119 • 1152126	250/6 • 170/8 • 140/10	275/10 • 205/15 • 170/20	5+1	10 lbs	6.2:1	31	11.6
SG4000	1152120 • 1152127	280/8 • 230/10 • 170/12	335/15 • 275/20 • 205/30	5+1	13 lbs	6.2:1	34	12.6
SG5000	1152121 • 1152128	250/12 • 220/15 • 190/17	405/20 • 305/30 • 250/40	5+1	20 lbs	5.6:1	37	20.3
SG6000	1152122 • 1152129	320/15 • 280/17 • 220/20	445/30 • 365/40 • 310/50	5+1	20 lbs	5.6:1	39	21.8
SG7000	1152123 • 1152130	390/17 • 310/20 • 280/25	505/40 • 430/50 • 360/65	5+1	25 lbs	5.3:1	39	27.8
SG8000	1152124 • 1152131	390/20 • 350/25 • 260/30	550/50 • 450/65 • 390/80	5+1	25 lbs	5.3:1	41	29.2

- Full metal body and sideplate keep precise gear alignment under heavy loads
- Machined and anodized aluminum spool
- Stainless steel main shaft
- 5 sealed stainless steel ball bearings

- Infinite anti-reverse
- Techno-balanced™ rotor gives smooth retrieves
- Machined and anodized aluminum handle with soft touch knob

FIERCE™ SPINNING • PURSUIT™ SPINNING



FIERCE SPINNING

Model	Mtr # (Box • Clam)	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag	Gear Ratio	Line Retrieve (in)	Weight (oz)
FRC1000	1238654 Box	180/2 • 115/4 • 80/6	160/6 • 130/8 • 115/10	4+1	7 lbs	5.2:1	20	7.7
FRC2000	1206112 • 1206113	260/4 • 210/6 • 140/8	260/8 • 225/10 • 170/15	4+1	7 lbs	6.2:1	29	8.8
FRC3000	1206114 • 1206115	250/6 • 170/8 • 140/10	275/10 • 205/15 • 170/20	4+1	10 lbs	6.2:1	31	11.7
FRC4000	1206116 • 1206117	280/8 • 230/10 • 170/12	335/15 • 275/20 • 205/30	4+1	13 lbs	6.2:1	34	12.5
FRC5000	1206118 • 1206120	250/12 • 220/15 • 190/17	405/20 • 305/30 • 250/40	4+1	20 lbs	5.6:1	37	19.0
FRC6000	1206121 • 1206122	320/15 • 280/17 • 220/20	445/30 • 365/40 • 310/50	4+1	20 lbs	5.6:1	39	20.6
FRC7000	1206123 • 1206124	390/17 • 310/20 • 280/25	505/40 • 430/50 • 360/65	4+1	25 lbs	5.3:1	39	26.4
FRC8000	1206125 • 1206126	390/20 • 350/25 • 260/30	550/50 • 450/65 • 390/80	4+1	25 lbs	5.3:1	41	27.4

- Full metal body and sideplate keep precise gear alignment under heavy loads
- Machined and anodized aluminum spool
- Stainless steel main shaft
- 4 stainless steel ball bearings

- Infinite anti-reverse
- Techno-balanced™ rotor gives smooth retrieves
- Machined and anodized aluminum handle with soft touch knob

PURSUIT SPINNING

Model	Mtr # (Box • Clam)	Mono Cap. (yds/lb)	Braid Cap. (yds/lb)	Bearings	Max Drag	Gear Ratio	Line Retrieve (in)	Weight (oz)
PUR3000	1190618 • 1190629	250/6 • 170/8 • 140/10	275/10 • 205/15 • 170/20	4+1	10 lbs	5.2:1	25	11.9
PUR4000	1190630 • 1190631	280/8 • 230/10 • 170/12	335/15 • 275/20 • 205/30	4+1	13 lbs	5.2:1	28	12.9
PUR5000	1190632 • 1190633	250/12 • 220/15 • 190/17	405/20 • 305/30 • 250/40	4+1	20 lbs	4.6:1	27	19.1
PUR6000	1190634 • 1190635	320/15 • 280/17 • 220/20	445/30 • 365/40 • 310/50	4+1	20 lbs	4.6:1	27	21.0
PUR7000	1190636 • 1190637	390/17 • 310/20 • 280/25	505/40 • 430/50 • 360/65	4+1	25 lbs	4.3:1	29	26.1
PUR8000	1190638 • 1190639	390/20 • 350/25 • 260/30	550/50 • 450/65 • 390/80	4+1	25 lbs	4.3:1	31	27.4

- Lightweight and corrosion-resistant graphite body
- Aluminum sideplate
- Machined and anodized aluminum spool

- Machine-cut alloy main gear
- 4+1 shielded stainless steel ball bearings
- Techno-balanced™ rotor gives smooth retrieves

INTERNATIONAL V IGFA & STANDUP



INTERNATIONAL V

Model	Material #	Length	Pieces	Line Weight	Guides + Tip	Type of Guides	Handle	Rod Butt
5030	1151150	6'10"	1	30 lbs	5+1	Aftco Roller	E	Aluminum/Detachable
5050	1151151	6'10"	1	50 lbs	5+1	Aftco Roller	E	Aluminum/Detachable
5070	1151152	6'10"	1	70 lbs	5+1	Aftco Roller	E	Aluminum/Detachable
5080	1151153	6'11"	1	80 lbs	5+1	Aftco Roller	F	Aluminum/Detachable
5080B	1151154	7'3"	1	80 lbs	5+1	Aftco Roller	G	Aluminum/Detachable
5130B	1151156	7'8"	1	130 lbs	5+1	Aftco Roller	G	Aluminum/Detachable
VS3080ARA56	1151160	5'6"	1	30-80 lbs	5+1	Aftco Roller	B	Aluminum
VS5010ARA56	1151168	5'6"	1	50-100 lbs	5+1	Aftco Roller	B	Aluminum
VS3080ARA60	1151161	6'0"	1	30-80 lbs	6+1	Aftco Roller	B	Aluminum
VS5010ARA60	1151169	6'0"	1	50-100 lbs	6+1	Aftco Roller	B	Aluminum
VS5010AWA60	1151172	6'0"	1	50-100 lbs	4+1	Aftco Windon Roller	C	Aluminum/Detachable
VS8013AWA60	1151189	6'0"	1	80-130 lbs	4+1	Aftco Windon Roller	C	Aluminum/Detachable
VS3080RS56	1151164	5'6"	1	30-80 lbs	6+1	Aftco Roller/Pac Bay Turbo	A	Slick Butt
VS5010RS56	1151173	5'6"	1	50-100 lbs	6+1	Aftco Roller/Pac Bay Turbo	A	Slick Butt
VS2040RS60	1151157	6'0"	1	20-40 lbs	7+1	Aftco Roller/Pac Bay Turbo	A	Slick Butt
VS3080RS60	1151165	6'0"	1	30-80 lbs	7+1	Aftco Roller/Pac Bay Turbo	A	Slick Butt
VS5010RS60	1151174	6'0"	1	50-100 lbs	7+1	Aftco Roller/Pac Bay Turbo	A	Slick Butt
VS5010TS60	1151175	6'0"	1	50-100 lbs	7+1	Pac Bay Turbo	A	Slick Butt
IK39 - Kite Rod	1151512	39"	1	-	0+1	Hard Chrome Stainless Steel	D	Slick Butt

- 1-Piece hollow e-glass construction
- Aftco roller guides (select models)
- Pac Bay turbo guides (select models)

- EVA fore grips
- Stuart Aluminum straight butt section (Bent butt designated as B)
- Aluminum gimbal

TUNA STICK®**TUNA STICK RODS**

Model	Material #	Length	Pieces	Line Weight	Guides + Tip	Type of Guides	Rod Butt	Gimbal
TS3080ARA56	1151258	5'6"	1	30-80 lbs	5+1	Aftco	Aluminum	Aluminum
TS5010ARA56	1151260	5'6"	1	50-100 lbs	5+1	Aftco	Aluminum	Aluminum
TS3080ARA60	1151259	6'0"	1	30-80 lbs	6+1	Aftco	Aluminum	Aluminum
TS5010ARA60	1151261	6'0"	1	50-100 lbs	6+1	Aftco	Aluminum	Aluminum

- 1-Piece tubular glass blank with solid tip
- Aftco roller guides - Aftco guides provide frictionless motion on all types of line
- Stuart aluminum reel seat - Stuart components provide increased strength and aluminum butts allow for easy access in and out of a rod holder
- EVA fore grips
- Stuart Aluminum straight butt section
- Aluminum gimbal with cover, designed to prevent corrosion

BLUEWATER CARNAGE™



**TORQUE
FOREGRIP**

**CARBON
SHIELD**

NEW



Fuji SS 'LR' Turbo frames with Hardloy inserts are light weight and use a unique shape that prevents the line from getting tangled. Models include CARBW2050C66, CARBW3080C66, CARBW50100C66, and CARBW765L.



Fuji SS 'N' flared frames with Hardloy inserts. Models include CARBW1530C66, CARBW1525C70LB, CARBW1530S70, and CARBW3050S70.



Fuji SS 'N' flared frames with Hardloy inserts. Models include CARBW1530C66, CARBW1525C70LB, CARBW2040C70LB, CARBW700XL, CARBW700ML, CARBW700M, CARBW800XL, and CARBW900M.



Fuji SS 'HN' flared frames with deep pressed Hardloy inserts. Hardloy deep pressed inserts provide a larger surface area for securing the ring material to the frame. This provides a stronger bond for more durable longer lasting guides. Model include CARBW700H.



Aftco rollers extend the life of your line by reducing friction at the key areas like the tip guide and stripper guide. Model includes CARBW760H.



EVA Torque grips are contoured to fit the hand perfectly and eliminate the rod from twisting while under a heavy load.

BIGWATER CARNAGE

Model	Material #	Length	Pieces	Line Weight	Guides + Tip	Type of Guides	Handle	Gimbal
CARBW1220S70	1238685	7'0"	1	12-20 lbs	6+1	Fuji	A	-
CARBW1530S70	1238686	7'0"	1	15-30 lbs	6+1	Fuji	B	Aluminum
CARBW3050S70	1238687	7'0"	1	30-50 lbs	6+1	Fuji	B	Aluminum
CARBW700XL	1238688	7'0"	1	10-25 lbs	9+1	Fuji	C	-
CARBW800XL	1238689	7'10"	1	10-25 lbs	11+1	Fuji	D	-
CARBW700ML	1238690	7'0"	1	20-40 lbs	8+1	Fuji	E	Aluminum
CARBW700M	1238691	7'0"	1	20-50 lbs	8+1	Fuji	E	Aluminum
CARBW800M	1238692	7'10"	1	20-50 lbs	9+1	Fuji	D	-
CARBW700H	1238693	7'0"	1	30-60 lbs	8+1	Fuji	F	Aluminum
CARBW765L	1238694	6'6"	1	30-80 lbs	7+1	Fuji	G	Aluminum
CARBW760H	1238695	6'0"	1	50-130 lbs	6+1	Aftco	H	Aluminum
CARBW1525C70LB	1238696	7'0"	1	15-25 lbs	9+1	Fuji	I	Aluminum
CARBW2040C70LB	1238697	7'0"	1	20-40 lbs	9+1	Fuji	I	Aluminum
CARBW1530C66	1238698	6'6"	1	15-30 lbs	7+1	Fuji	I	Aluminum
CARBW2050C66	1238699	6'6"	1	20-50 lbs	7+1	Fuji	J	Aluminum
CARBW3080C66	1238700	6'6"	1	30-80 lbs	7+1	Fuji	J	Aluminum
CARBW50100C66	1238701	6'6"	1	50-100 lbs	7+1	Fuji	K	Aluminum

• Graphite composite blank
• Fuji® Turbo frame with Hardloy inserts

• Fuji® heavy duty graphite reel seat (select models)

• Aftco roller guides (select models)
• Aluminum gimbal with cover (select models)

BLUEWATER CARNAGE™ JIGGING



Fuji SS "N" flared frames with Hardloy inserts. Models include CARJG200S56, CARJG80130S60, CARJG65100S64, CARJG3080S66, and CARJG2050S70



Fuji SS "HIN" flared frames with deep pressed Hardloy inserts are light weight and prevents the line from getting tangled around the frame. Hardloy deep pressed inserts also provide a larger surface area for securing the ring material to the frame. This provides a stronger bond for more durable longer lasting guides. Models include CARJG200C56, CARJG80130C58, CARJG65100C62, CARJG50100C66, and CARJG3080C66

NEW



TORQUE FOREGRIP

CARBON SHIELD

BIGWATER CARNAGE JIGGING

Model	Material #	Length	Pieces	Line Weight	Lure Weight	Guides + Tip	Type of Guides	Handle
CARJG2050S70	1238702	7'0"	1	20-50 lbs	1-4 oz, 30-112g	8+1	Fuji Hardloy	A
CARJG3080S66	1238703	6'6"	1	30-80 lbs	2-5 oz, 60-140g	7+1	Fuji Hardloy	A
CARJG65100S64	1238704	6'4"	1	65-100 lbs	5-8 oz, 140-224g	7+1	Fuji Hardloy	B
CARJG80130S60	1238705	6'0"	1	80-130 lbs	6-10 oz, 170-280g	6+1	Fuji Hardloy	B
CARJG200S56	1238706	5'6"	1	130-200 lbs	8-14 oz, 230-400g	5+1	Fuji Hardloy	B
CARJG3080C66	1238707	6'6"	1	30-80 lbs	2-5 oz, 60-140g	8+1	Fuji Hardloy/Deep Press Inserts	C
CARJG50100C66	1238708	6'6"	1	50-100 lbs	4-7 oz, 112-200g	8+1	Fuji Hardloy/Deep Press Inserts	C
CARJG65100C62	1238709	6'2"	1	65-100 lbs	5-8 oz, 140-224g	8+1	Fuji Hardloy/Deep Press Inserts	C
CARJG80130C58	1238710	5'8"	1	80-130 lbs	6-10 oz, 170-280g	8+1	Fuji Hardloy/Deep Press Inserts	C
CARJG200C56	1238711	5'6"	1	130-200 lbs	8-14 oz, 230-400g	7+1	Fuji Hardloy/Deep Press Inserts	C

- Fuji® Deep Press Hardloy Guides (select models)
- Fuji® Palm style reel seat (select models)

- Triangular shaped EVA grips
- Aluminum gimbal with cover (select models)

SENATOR • POWER STICK BOAT



SENATOR BOAT

Model	Material #	Length	Pieces	Line Weight	Guides + Tip	Type of Guides	Rod Butt	Gimbal
3135RS	1151266	6'6"	1	20-40 lbs	5+1	Aftco	Slick Butt	Aluminum
3145RS	1151267	6'6"	1	30-50 lbs	5+1	Aftco	Slick Butt	Aluminum
3165RS	1151268	6'6"	1	40-60 lbs	5+1	Aftco	Slick Butt	Aluminum
3195RS	1151269	6'6"	1	50-80 lbs	5+1	Aftco	Slick Butt	Aluminum

- 1-Piece tubular glass blank with solid tip
- Chrome plated guides between Aftco roller stripper and roller tip - Aftco guides provide frictionless motion on all types of line
- Aluminum gimbal with cover, designed to prevent corrosion
- Machine aluminum reel seat
- EVA fore grips
- Slick butt



POWER STICK BOAT

Model	Material #	Length	Pieces	Line Weight	Guides + Tip	Type of Guides	Handles	Gimbal
PS4811	1151331	7'0"	1	12-30 lbs	7+1	AX Spinning	EVA	-
PS4821	1151332	7'0"	1	15-40 lbs	7+1	AX Spinning	EVA	Graphite
PC6661MH	1151325	6'6"	1	20-50 lbs	8+1	Chrome Ring	EVA	-
P1540C66T	1151314	6'6"	1	15-40 lbs	6+1	AX Turbo	EVA	Graphite
PC3661MH	1151318	6'6"	1	20-50 lbs	6+1	AX Conventional	EVA	Graphite
PC3723	1151319	7'0"	1	15-40 lbs	7+1	AX Conventional	EVA	-
PC3866	1151324	6'6"	1	15-40 lbs	8+1	AX Conventional	EVA	-
PC3801	1151320	7'0"	1	12-25 lbs	8+1	AX Conventional	EVA	Graphite
P4080C76T	1151317	7'6"	1	40-80 lbs	6+1	AX Conventional	EVA	Graphite
PC3811	1151322	7'0"	1	12-30 lbs	8+1	AX Conventional	EVA	Graphite
PC3821	1151323	7'0"	1	15-40 lbs	8+1	AX Conventional	EVA	Graphite
P2050C66WL	1151316	6'6"	1	20-50 lbs	4+1	Carbide	EVA	Graphite

- 1-Piece tubular glass blank with solid tip
- Stainless steel guides with aluminum oxide inserts (select models)
- Chrome plated guides (select models)
- Carbide guides (P2050C66WL)
- EVA grips (select models)
- Graphite gimbal with cover (select models)

MARINER® STANDUP & BOAT



MARINER STANDUP

Model	Material #	Length	Pieces	Line Weight	Guides + Tip	Type of Guides	Rod Butt	Gimbal
MSU1220S70	1187687	7'0"	1	12-20 lbs	7+1	AX Spinning	Slick Butt	Aluminum
MSU1530S70	1187688	7'0"	1	15-30 lbs	7+1	AX Spinning	Slick Butt	Aluminum
MSU2040S70	1187689	7'0"	1	20-40 lbs	7+1	AX Spinning	Slick Butt	Aluminum
530CMST	1151279	5'6"	1	20-50 lbs	5+1	AX Turbo	Slick Butt	Aluminum
630CMST	1151283	6'0"	1	20-50 lbs	6+1	AX Turbo	Slick Butt	Aluminum
MSU2050RS60	1151196	6'0"	1	20-50 lbs	6+1	Stuart Roller/AX Turbo	Slick Butt	Aluminum
MSU2050C66	1187690	6'6"	1	20-50 lbs	6+1	AX Turbo	Slick Butt	Aluminum
MSU2050C70	1187691	7'0"	1	20-50 lbs	7+1	AX Turbo	Slick Butt	Aluminum
560CHST	1151280	5'6"	1	30-80 lbs	5+1	AX Turbo	Slick Butt	Aluminum
MB3080C56	1151295	5'6"	1	30-80 lbs	6+1	Aftco Roller/AX Turbo	Slick Butt	Aluminum
660CHST	1151284	6'0"	1	30-80 lbs	6+1	AX Turbo	Slick Butt	Aluminum
MSU3080RS60	1151197	6'0"	1	30-80 lbs	6+1	Stuart Roller/AX Turbo	Slick Butt	Aluminum
580CHST	1151281	5'6"	1	50-100 lbs	5+1	AX Turbo	Slick Butt	Aluminum
MSU5010RS56	1151195	5'6"	1	50-100 lbs	5+1	Stuart Roller/AX Turbo	Slick Butt	Aluminum

- 1-Piece glass blank
- Stuart roller stripper and roller tip guides (select models)
- Turbo frame with aluminum oxide inserts

- EVA fore grips
- Slick butt
- Aluminum gimbal with cover, designed to prevent corrosion



MARINER BOAT

Model	Material #	Length	Pieces	Line Weight	Guides + Tip	Type of Guides	Handles	Gimbal
MB1025C56	1186139	5'6"	1	10-25 lbs	4+1	AX Conventional	EVA	-
MB1530C60	1186140	6'0"	1	15-30 lbs	5+1	AX Conventional	EVA	-
MB1530C66	1186141	6'6"	1	15-30 lbs	5+1	AX Conventional	EVA	-
MB2050C66	1186144	6'6"	1	20-50 lbs	5+1	AX Conventional	EVA	-
MB1025S56	1151287	5'6"	1	10-25 lbs	4+1	AX Spinning	EVA	-
MB1530S60	1186142	6'0"	1	15-30 lbs	5+1	AX Spinning	EVA	-
MB1530S70	1186143	7'0"	1	15-30 lbs	5+1	AX Spinning	EVA	-
MB2050S66	1151294	6'6"	1	20-50 lbs	5+1	AX Spinning	EVA	-

- 1-Piece solid glass blank
- Graphite reel seat
- Stainless steel guides with aluminum oxide inserts
- EVA grips

LEGION™ INSHORE



CARBON SCALE

NEW



Soft yet durable rubber gimbal provides the same function as a traditional metal gimbal without the worries of scratching or cracking the gel coat on your boat. Rubber gimbals also help ease the pain that traditional metal gimbals can put on your body while fighting a fish.

Fuji SS frames with Hardloy inserts provide a lightweight and durable guide.

A unique twist of lightweight carbon fiber strands create a scale like pattern.

LEGION INSHORE

Model	Material #	Length	Action	Pieces	Power	Line Weight	Lure Weight	Guides + Tip	Type of Guides	Handles	Gimbal
LEGIN612S69	1238712	6'9"	Fast	1	L	6-12 lb. Mono / 6-15 lb. Braid	1/16 - 1/2	7+1	Fuji Hardloy	A	-
LEGIN815S66	1238713	6'6"	Xtra Fast	1	ML	8-15 lb. Mono / 8-20 lb. Braid	1/4 - 5/8 oz.	7+1	Fuji Hardloy	A	-
LEGIN815S70	1238714	7'0"	Xtra Fast	1	ML	8-15 lb. Mono / 8-20 lb. Braid	1/4 - 5/8 oz.	7+1	Fuji Hardloy	A	-
LEGIN815S73	1238715	7'3"	Xtra Fast	1	ML	8-15 lb. Mono / 8-20 lb. Braid	1/4 - 5/8 oz.	8+1	Fuji Hardloy	A	-
LEGIN815S76	1238716	7'6"	Xtra Fast	1	ML	8-15 lb. Mono / 8-20 lb. Braid	1/4 - 5/8 oz.	8+1	Fuji Hardloy	B	-
LEGIN815S80	1238717	8'0"	Xtra Fast	1	ML	8-15 lb. Mono / 8-20 lb. Braid	1/4 - 5/8 oz.	8+1	Fuji Hardloy	C	-
LEGIN1017S70	1238718	7'0"	Xtra Fast	1	M	10-17 lb. Mono / 10-30 lb. Braid	3/8 - 3/4 oz.	7+1	Fuji Hardloy	A	-
LEGIN1017S76	1238719	7'6"	Xtra Fast	1	M	10-17 lb. Mono / 10-30 lb. Braid	3/8 - 3/4 oz.	8+1	Fuji Hardloy	B	-
LEGIN1017S80	1238720	8'0"	Xtra Fast	1	M	10-17 lb. Mono / 10-30 lb. Braid	3/8 - 3/4 oz.	8+1	Fuji Hardloy	C	-
LEGIN1220S70	1238721	7'0"	Fast	1	MH	12-20 lb. Mono / 20-40 lb. Braid	1/2 - 1 oz.	7+1	Fuji Hardloy	D	-
LEGIN1220S76	1238729	7'6"	Fast	1	MH	12-20 lb. Mono / 20-40 lb. Braid	1/2 - 1 oz.	8+1	Fuji Hardloy	D	-
LEGIN1530S70	1238722	7'0"	Fast	1	H	15-30 lb. Mono / 20-50 lb. Braid	5/8 - 1 1/2 oz.	7+1	Fuji Hardloy	E	Rubber
LEGIN1530S76	1238723	7'6"	Fast	1	H	15-30 lb. Mono / 20-50 lb. Braid	5/8 - 1 1/2 oz.	8+1	Fuji Hardloy	E	Rubber
LEGIN2040S70	1238724	7'0"	Fast	1	XH	20-40 lb. Mono / 30-65 lb. Braid	3/4 - 2 oz.	7+1	Fuji Hardloy	E	Rubber
LEGIN2040S76	1238725	7'6"	Fast	1	XH	20-40 lb. Mono / 30-65 lb. Braid	3/4 - 2 oz.	8+1	Fuji Hardloy	E	Rubber
LEGIN2040S80	1238726	8'0"	Fast	1	XH	20-40 lb. Mono / 30-65 lb. Braid	3/4 - 2 oz.	8+1	Fuji Hardloy	E	Rubber
LEGIN1017C70	1238727	7'0"	Xtra Fast	1	M	10-17 lb. Mono / 10-30 lb. Braid	3/8 - 3/4 oz.	8+1	Fuji Hardloy	F	-
LEGIN1220C70	1238728	7'0"	Fast	1	MH	12-20 lb. Mono / 20-40 lb. Braid	1/2 - 1 oz.	8+1	Fuji Hardloy	G	-
LEGIN1530C70	1238730	7'0"	Fast	1	H	15-30 lb. Mono / 20-50 lb. Braid	5/8 - 1 1/2 oz.	8+1	Fuji Hardloy	H	Rubber

- 100% graphite blank for incredible strength
- Fuji® Hardloy guides

- Fuji® reel seat

ALLEGIANCE™ INSHORE



ALLEGIANCE INSHORE

Model	Material #	Length	Action	Pieces	Power	Line Weight	Lure Weight	Guides + Tip	Type of Guides	Handles
ALLIN612S69	1206130	6'9"	Fast	1	L	6-12 lb. Mono / 6-15 lb. Braid	1/16 - 1/2 oz.	7+1	Fuji AX	EVA
ALLIN815S70	1206131	7'0"	Xtra Fast	1	ML	8-15 lb. Mono / 8-20 lb. Braid	1/4 - 5/8 oz.	7+1	Fuji AX	EVA
ALLIN815S73	1206132	7'3"	Xtra Fast	1	ML	8-15 lb. Mono / 8-20 lb. Braid	1/4 - 5/8 oz.	8+1	Fuji AX	EVA
ALLIN1017S70	1206133	7'0"	Xtra Fast	1	M	10-17 lb. Mono / 10-30 lb. Braid	3/8 - 3/4 oz.	7+1	Fuji AX	EVA
ALLIN1017S76	1206134	7'6"	Xtra Fast	1	M	10-17 lb. Mono / 10-30 lb. Braid	3/8 - 3/4 oz.	8+1	Fuji AX	EVA
ALLIN1220S70	1206135	7'0"	Fast	1	MH	12-20 lb. Mono / 20-40 lb. Braid	1/2 - 1 oz.	7+1	Fuji AX	EVA
ALLIN1530S70	1206136	7'0"	Fast	1	H	15-30 lb. Mono / 20-50 lb. Braid	5/8 - 1 1/2 oz.	7+1	Fuji AX	EVA
ALLIN815C70	1206127	7'0"	Fast	1	ML	8-15 lb. Mono / 8-20 lb. Braid	1/4 - 5/8 oz.	8+1	Fuji AX	EVA
ALLIN1017C70	1206128	7'0"	Xtra Fast	1	M	10-17 lb. Mono / 10-30 lb. Braid	3/8 - 3/4 oz.	8+1	Fuji AX	EVA
ALLIN1530C70	1206129	7'0"	Fast	1	H	15-30 lb. Mono / 20-50 lb. Braid	5/8 - 1 1/2 oz.	8+1	Fuji AX	EVA

- 100% graphite blank for incredible strength and sensitivity
- Fuji® aluminum oxide guides

- Graphite reel seat
- Contoured EVA grips

TORQUE[™] SURF

TRC

PACIFIC BAY



TORQUE SURF

Model	Material #	Length	Pieces	Line Weight	Lure Weight	Guides + Tip	Type of Guides	Handles
TS1220S80	1206144	8'0"	2	12 - 20 lb. Mono / 17-30 lb. Braid	3/4 - 3 oz.	6+1	Pac Bay	Cork Tape
TS1220S90	1206145	9'0"	2	12 - 20 lb. Mono / 17-30 lb. Braid	3/4 - 3 oz.	6+1	Pac Bay	Cork Tape
TS1530S10	1206146	10'0"	2	15 - 30 lb. Mono / 20-50 lb. Braid	1 - 5 oz.	6+1	Pac Bay	Cork Tape
TS1530S11	1206147	11'0"	2	15 - 30 lb. Mono / 20-50 lb. Braid	2 - 6 oz.	7+1	Pac Bay	Cork Tape
TS2040S12	1206148	12'0"	2	20-40 lb. Mono / 30-65 lb. Braid	4 - 10 oz.	7+1	Pac Bay	Cork Tape
TS1220C10	1206141	10'0"	2	12-20 lb. Mono / 17-30 lb. Braid	1 - 4 oz.	8+1	Pac Bay	Cork Tape
TS1530C11	1206142	11'0"	2	15 - 30 lb. Mono / 20-50 lb. Braid	2 - 6 oz.	8+1	Pac Bay	Cork Tape
TS2040C12	1206143	12'0"	2	20-40 lb. Mono / 30-65 lb. Braid	4 - 10 oz.	8+1	Pac Bay	Cork Tape

- TRC[™] Torque Rod Construction 100% Graphite Rod
- Pac Bay Stainless Steel Titanium coated guides

- Fuji[®] reel seat
- Cork tape grips

POWERSTICK & SPINFISHER® SURF



POWER STICK SURF

Model	Material #	Length	Pieces	Line Weight	Lure Weight	Guides + Tip	Type of Guides	Handles
PSS1220S80	1151333	8'0"	2	12-20 lbs	1/4-2 oz	4+1	AX	Cork Tape
PSS1220S90	1151334	9'0"	2	12-20 lbs	1-5 oz	4+1	AX	Cork Tape
PSS1530S10	1151335	10'0"	2	15-30 lbs	1-5 oz	4+1	AX	Cork Tape
PSS1530S11	1151336	11'0"	2	15-30 lbs	3-6 oz	4+1	AX	Cork Tape
PSS2040S12	1151337	12'0"	2	20-40 lbs	4-8 oz	5+1	AX	Cork Tape

- 2-Piece graphite tubular blank
- Aluminum oxide spinning guides
- Graphite reel seat
- Cork tape grips



SPINFISHER SURF

Model	Material #	Length	Pieces	Line Weight	Lure Weight	Guides + Tip	Type of Guides	Handles
SBG9808	1151339	8'0"	2	12-20 lbs	3/4-3 oz	4+1	AX	EVA
SBG9809	1151340	9'0"	2	12-20 lbs	1-5 oz	4+1	AX	EVA
SBG9810	1151341	10'0"	2	15-30 lbs	3-6 oz	4+1	AX	EVA
SBG9811MH	1151342	11'0"	2	15-30 lbs	3-6 oz	4+1	AX	EVA
SBG9812H	1151343	12'0"	2	20-40 lbs	3-6 oz	5+1	AX	EVA

- 2-Piece graphite tubular blank (except SBG9807)
- Aluminum oxide spinning guides
- Graphite reel seat
- EVA grips

SENATOR LEVEL • GT2 WIND COMBO



SENATOR

Model	Material #	Reel	Line Capacity	Rod	Length	Pieces	Line Weight	Handles
91330	1151521	113H2	440yds/30lb	SL2050C66	6'6"	1	20-50 lbs	EVA
91313	1151520	113H2	440yds/30lb	SL2050CR66	6'6"	1	20-50 lbs	EVA
91332	1151522	113H2	440yds/30lb	SL2050C66T	6'6"	1	20-50 lbs	EVA
91464	1151525	114H2	450yds/50lb	SL3080C66	6'6"	1	30-80 lbs	EVA
91414	1151524	114H2	450yds/50lb	SL3080CR66	6'6"	1	30-80 lbs	EVA

Special Senator Reel
Slammer Rod

- 1-Piece tubular graphite composite blank
- Graphite reel seat
- EVA grips
- Aluminum gimbal with cover



GT LEVEL WIND

Model	Material #	Reel	Line Capacity	Rod	Length	Pieces	Line Weight	Handles
93230	1186147	320GT2	290yds/20lb	SL2050C66	6'6"	1	20-40 lbs	EVA
93212	1151528	320GT2	290yds/20lb	SL1230C70	7'0"	1	12-30 lbs	EVA
93330	1151532	330GT2	330yds/30lb	SL2050C66	6'6"	1	20-50 lbs	EVA
93350	1151534	330GT2	330yds/30lb	SL2050CR66	6'6"	1	20-50 lbs	EVA
93331	1151533	330GT2	330yds/30lb	SL3080C66	6'6"	1	30-80 lbs	EVA
9310LC80CB	1187697	310GT2LC	330yds/15lb	PD3880	8'0"	2	10-20 lbs	EVA
9320LC86CB	1187698	320GT2LC	290yds/20lb	P1020GL86	8'6"	2	10-20 lbs	EVA

GT LEVELWIND Reel
GT Linecounter Reel
Power Stick Rod

- 2-Piece graphite tubular blank
- Integrated Solid Tip (IST) Construction
- Graphite reel seat
- EVA grips

**Ugly
Stik**



GT & UGLY STIK LEVEL WIND

Model	Material #	Reel	Line Capacity	Rod	Length	Pieces	Line Weight	Handles
9320BW70LB	1151698	320GT2	290yds/20lb	BWLB110070	7'0"	1	12-25 lbs	EVA
9320BW66MH	1151699	320GT2	290yds/20lb	BWB113066	6'6"	1	15-40 lbs	EVA
9330BW66H	1151700	330GT2	330yds/30lb	BWB114066	6'6"	1	20-50 lbs	EVA
9330BW70H	1151701	330GT2	330yds/30lb	BWB114070	7'0"	1	20-50 lbs	EVA

GT LEVELWIND Reel
Ugly Stik Rod

- Ugly Stik® Howald Process blank
- Stainless steel guides with aluminum oxide inserts
- Fuji® reel seat
- EVA grips

DEFIANCE™ • JIGMASTER® • LEVEL WIND COMBO

NEW

DEFIANCE

Model	Material #	Reel	Line Capacity	Rod	Length	Pieces	Line Weight	Handles
DFN206012030	1238681	DFN20LW	390/15	DFNBT2030C60	6'0"	1	20-30 lbs	EVA
DFN256612040	1238682	DFN25LW	300/25	DFNBT2040C66	6'6"	1	20-40 lbs	EVA
DFN406613050	1238683	DFN40LW	340/30	DFNBT3050C66	6'6"	1	30-50 lbs	EVA
DFN307011530	1238684	DFN30	290/30	DFNLB1530C70	7'0"	1	15-30 lbs	EVA

- 1 piece tubular glass blank with solid tip
- Chrome plated stainless steel guides
- Heavy duty graphite reel seat

JIGMASTER

Model	Material #	Reel	Line Capacity	Rod	Length	Pieces	Line Weight	Handles
95011	1151548	500L	300yds/30lb	SL1740C70CR	7'0"	1	17-40 lbs	EVA

- Jigmaster Reel
Slammer Rod
- 1-Piece tubular graphite composite blank
 - Graphite reel seat
 - EVA grips
 - Graphite gimbal with cover

LEVEL WIND

Model	Material #	Reel	Line Capacity	Rod	Length	Pieces	Line Weight	Handles
90960	1151543	209M	290yds/20lb	MB1530C60	6'0"	1	15-30 lbs	EVA
93930	1151545	309M	300yds/30lb	MB2050C66	6'6"	1	20-50 lbs	EVA

- Level Wind Reel
Mariner Rod
- 1-Piece solid glass blank
 - Graphite reel seat
 - EVA grips

SPINFISHER® SPINNING COMBO



SPINFISHER

Model	Material #	Reel	Line Capacity	Rod	Length	Pieces	Power	Line Weight	Handles
94486	1151551	440SSg	220yds/10lb	SL612S66	6'6"	1	L	6-12 lbs	Cork
94487	1151552	440SSg	220yds/10lb	SL612S70	7'0"	1	L	6-12 lbs	Cork
95587	1151555	550SSg	270yds/12lb	SL817S70	7'0"	1	ML	8-17 lbs	Cork
95517	1151550	550SSg	270yds/12lb	SL1020S70F	7'0"	1	M	10-20 lbs	EVA
96517	1151559	650SSm	320yds/15lb	SL1220S70F	7'0"	1	MH	12-20 lbs	EVA
97517	1151561	750SSm	290yds/20lb	SL1530S70F	7'0"	1	H	15-30 lbs	EVA
98517	1151562	850SSm	340yds/25lb	SL1530S70F	7'0"	1	H	15-30 lbs	EVA

Spinfisher Reel

- Machined and anodized aluminum spool
- Machine-cut alloy main gear
- Stainless steel main shaft
- HT-100™ system

Slammer Rod

- Tubular graphite composite blank (select models)
- Graphite reel seat

Ugly Stik

SPINFISHER & UGLY STIK

Model	Material #	Reel	Line Capacity	Rod	Length	Pieces	Power	Line Weight	Handles
9440IS661M	1151688	440SSg	220yds/10lb	SP111661M	6'6"	1	L	6-15 lbs	Cork
9440IS701ML	1151689	440SSg	220yds/10lb	SP111701ML	7'0"	1	L	6-15 lbs	Cork
9450IS701M	1151690	450SSg	220yds/12lb	SP111701M	7'0"	1	L	6-15 lbs	Cork
9550IS701MH	1151691	550SSg	270yds/12lb	SP111701MH	7'0"	1	ML	8-17 lbs	Cork
9550BW662MH	1151692	550SSg	270yds/12lb	BWS110066	6'6"	2	M	10-25 lbs	EVA
9550BW702MH	1151693	550SSg	270yds/12lb	BWS110070	7'0"	2	M	10-25 lbs	EVA
9550BW701MH	1151694	550SSg	270yds/12lb	BWS110170	7'0"	1	MH	12-30 lbs	EVA
9550BW802MH	1151695	550SSg	270yds/12lb	BWS110080	8'0"	2	M	10-25 lbs	EVA
9750BW701H	1151696	750SSm	290yds/20lb	BWS110270	7'0"	1	M	15-40 lbs	EVA
9750BW902MH	1151697	750SSm	290yds/20lb	BWS110090	9'0"	2	MH	12-30 lbs	EVA

Spinfisher Reel

- Machined and anodized aluminum spool
- Machine-cut alloy main gear
- Stainless steel main shaft
- HT-100™ system

Ugly Stik® Rod

- Ugly Stik® Howald Process blank
- Stainless steel guides with aluminum oxide inserts
- Fuji® reel seat
- EVA grips (select models)

SPINNING COMBOS

SARGUS®

Model	Material #	Reel	Line Capacity	Rod	Length	Pieces	Power	Line Weight	Handles
92066	1151594	SG2000	210yds/6lb	SL612S66	6'6"	1	L	6-12 lbs	Cork
93067	1151556	SG3000	170yds/8lb	SL612S70	7'0"	1	L	6-12 lbs	Cork
94070	1151595	SG4000	230yds/10lb	SL817S70	7'0"	1	ML	8-17 lbs	Cork
95072	1151599	SG5000	220yds/15lb	SL1020S70F	7'0"	1	M	10-20 lbs	EVA
94073	1151598	SG6000	280yds/17lb	SL1220S70F	7'0"	1	MH	12-20 lbs	EVA
97007	1153852	SG7000	310yds/20lb	SL1530S70F	7'0"	1	H	15-30 lbs	EVA

Sargus Reel

- Full metal body and sideplate keep precise gear alignment under heavy loads
- Machined and anodized aluminum spool
- Machine-cut alloy main gear

Stammer Rod

- Tubular graphite composite blank (select models)
- Graphite reel seat

FIERCE™

Model	Material #	Reel	Line Capacity	Rod	Length	Pieces	Power	Line Weight	Handles
FRC2000661ML	1206149	FRC2000	210yds/6lb	FRC612S66	6'6"	1	L	6-12 lbs	EVA
FRC3000701ML	1206150	FRC3000	170yds/8lb	FRC612S70	7'0"	1	L	6-12 lbs	EVA
FRC4000701M	1206151	FRC4000	230yds/10lb	FRC817S70	7'0"	1	ML	8-17 lbs	EVA
FRC5000701MH	1206152	FRC5000	220yds/15lb	FRC1020S70	7'0"	1	M	10-20 lbs	EVA
FRC6000701MH	1206153	FRC6000	280yds/17lb	FRC1225S70	7'0"	1	MH	12-25 lbs	EVA
FRC6000802MH	1206154	FRC6000	280yds/17lb	FRC1225S802	8'0"	2	-	12-25 lbs	EVA
FRC7000902H	1206155	FRC7000	310yds/20lb	FRC1530S902	9'0"	2	-	15-30 lbs	EVA
FRC8000701H	1206156	FRC8000	350yds/25lb	FRC1530S70	7'0"	1	H	15-30 lbs	EVA
FRC8000102H	1206157	FRC8000	350yds/25lb	FRC2040S102	10'0"	2	-	20-40 lbs	EVA

Fierce Reel

- Full metal body and sideplate
- Machined and anodized aluminum spool
- 4+1 Stainless steel bearing system

Fierce Rod

- Graphite composite blank
- Aluminum oxide guides

PURSUIT®

Model	Material #	Reel	Line Capacity	Rod	Length	Pieces	Power	Line Weight	Handles
PUR3000701ML	1190505	PUR3000	170yds/8lb	PUR612S70	7'0"	1	L	6-12 lbs	EVA
PUR4000701M	1190611	PUR4000	230yds/10lb	PUR817S70	7'0"	1	ML	8-17 lbs	EVA
PUR5000701MH	1190613	PUR5000	220yds/15lb	PUR1020S70	7'0"	1	M	10-20 lbs	EVA
PUR6000701MH	1190614	PUR6000	280yds/17lb	PUR1225S70	7'0"	1	MH	12-25 lbs	EVA
PUR6000802MH	1201531	PUR6000	280yds/17lb	PUR1225S802	8'0"	2	-	12-25 lbs	EVA
PUR7000902H	1190616	PUR7000	310yds/20lb	PUR1530S902	9'0"	2	-	15-30 lbs	EVA
PUR8000701H	1190615	PUR8000	350yds/25lb	PUR1530S70	7'0"	1	H	15-30 lbs	EVA
PUR8000102H	1190617	PUR8000	350yds/25lb	PUR2040S102	10'0"	2	-	20-40 lbs	EVA

Pursuit Reel

- Lightweight and corrosion-resistant graphite body
- Techno-balanced™
- Machined and anodized aluminum spool
- 4+1 Stainless steel bearing system

Pursuit Rod

- Graphite composite blank
- EVA grips
- Aluminum oxide guides

DOWNRIGGERS & ACCESSORIES



DOWNRIGGERS & ACCESSORIES

Model	Material #	Description
600NW	1152758	Fathom-Master® 24 in. Boom, 200 ft. Cable, No Weight
625NW	1152759	Fathom-Master® 48 in. Boom, 200 ft. Cable, Swivel-Matic® Base
10WNR	1152760	FathomTrol Weight (10 lb.) No Release
610RH	1152761	Rod Holder Kit for Manual Fathom-Master®
622ASM	1152762	Adjustable Swivel-Matic Base for all Fathom-Masters®
632	1152763	Quick Mount Jr. 9" Flush Mount Adaptor
634	1152764	Quick Mount Sr. 12" Flush Mount Adaptor
638	1152765	Boom Extension Kit
133C-600SP	1152766	Fixed Base Plate for all Fathom-Master® Models
212-600SP	1152767	Replacement Cable - 200ft 135lb
213-825SP	1152770	Cable Hardware Kit
354-POR1	1152772	Penn® Offshore Release



- 5mm Neoprene Cover
- Triple Stitched Seams
- Durable Velcro® Closures
- Lug Cut-Outs "Slots" For Easy Storage

NEOPRENE COVERS

Model	Material #	Description	Description	Reels
XXSMRC	1178860	Conventional	Extra Extra Small	TRQ200, TRQ100, TRQ100LD, 965, 975, 975CS, 975CSLD, 975SLD, 112H, 310GT1, 310GT2, 525MAG, 525GS, 535GS, 545GS, 500L, 320GT1, 320GT2, 320LD, 555GS
XSMRC	1187962	Conventional	Extra Small	TRQ300, TRQ300LD
SMLRC	1178861	Conventional	Small	30VSX, 16VSX, 16VS, 30TW, 30T, 20T, 16S, 12LT, 10KG, 113, 113H, 113H2, 113HSP, 113H2SP, 113HLW, 113H2LW, 113HN, 113MTL, GLD20II, 10LD, 220, 230, GLD20, 15LD, 330GT1, 330GT2, 330LD
MEDRC	1178862	Conventional	Medium	50VSX, 30VSW, 30VW, 50S, 50T, 50ST, 30SW, 30TW, 30T, 30S, 114, 114H, 114HLW, 340GT1, 340GT2, 345GT1, 345GT2, 15KG, GLD30, GLD30II, 24KG
LRGRC	1178863	Conventional	Large	70VS, 50VSW, 50VW, 70VSL, 50SW, 50S, 50TW, 115L, GLD50II, 116L
XLGRC	1178864	Conventional	Extra Large	80VSW, 80TW, 80T, 80STW, 80ST
XXLRC	1178865	Conventional	Extra Extra Large	130VSX, 130ST, 117L
SMLSRC	1203327	Spinning	Small	CQR2000, CQR4000, 260, 360, 420SSg, 430SSg, SG2000, SG3000, SG4000, CV22000, CV24000, PUR3000, PUR4000, AF1000, AF2000, AF3000, AF4000, 4200SS, 4300SS, SV2000, SV4000
MEDSRC	1203328	Spinning	Medium	CQR5000, CQR7000, 460, 560, 440SSg, 450SSg, 550SSg, SG5000, CV25000, PUR5000, 4400SS, 4500SS, 5500SS, CLL4000, SV5000
LRGSRC	1203359	Spinning	Large	TRQS5, 460L, 560L, 760, 650SSm, 750SSm, SG6000, CV26000, PUR6000, 6500SS, 7500SS, CLL5000, CLL6000, SV6000
XLGSRC	1203360	Spinning	Extra Large	TRQS7, TRQS9, 760L, 850SSm, 950SSm, SG7000, SG8000, CV28000, PUR7000, PUR8000, 8500SS, 9500SS, SV8000

NEW



PENN LUBE

Model	Material #	Description
2OZOLSD24	1238737	2 oz dripper bottle of oil in a 24 pieces shipper display
4OZOLCS6	1238738	4 oz dripper bottle of oil
QTROZGSEFB100	1238739	1/4 oz tube of grease in a 100 pieces plastic fishbowl display
2OZGSESD12	1238740	2 oz tub of grease in a 12 pieces shipper display
1LBGSECS4	1238741	1 lb tub of grease
4OZCLNCS6	1238742	4 oz spray bottle of rod and reel cleaner
12OZCLNCS6	1238743	12 oz spray bottle of rod and reel cleaner
ANGPCKCS6	1238744	.5 oz bottle of oil with 1 oz tub of grease

PENN LUBE - Yes, its back. What was formerly referred to as X1R will now be distributed by PENN. We've acquired the technology to manufacture the same product you've always trusted to maintain your reels. Nothing about the formula has changed, not the corrosion and wear protection that this product offers, not even the blue color. The only difference is that you can now you can buy the product directly from PENN.

MASTER CAPACITY CHART

SPOOL CAPACITIES VARY BY LINE MANUFACTURER

MODEL	MONO CAPACITY (YDS/LB)			MONO CAPACITY (M/MM)			BRAID CAPACITY (YDS/LB)			BRAID CAPACITY WITH TOPSHOT (YDS/LB)			TOPSHOT
INTERNATIONAL													
12VS	875/12	775/15	525/20	800/0.36	709/0.38	480/0.46	1425/20	1075/30	750/50	1175/20	900/30	625/50	40lb 50yds
12VSX	360/30	300/40	220/50	329/0.56	274/0.62	201/0.71	750/50	625/65	525/80	625/50	525/65	450/80	40lb 50yds
12V	875/12	775/15	525/20	800/0.36	709/0.38	780/0.46	1425/20	1075/30	750/50	1175/20	900/30	625/50	40lb 50yds
16VS	1025/16	700/20	480/30	937/0.39	640/0.46	438/0.56	1000/50	825/65	700/80	825/50	675/65	600/80	50lb 50yds
16VSX	1025/16	700/20	480/30	937/0.39	640/0.46	438/0.56	825/65	700/80	600/100	650/65	575/80	490/100	60lb 50yds
30VSW	900/30	550/50	480/60	822/0.56	502/0.71	438/0.76	1525/65	1325/80	1125/100	1375/65	1175/80	1000/100	60lb 50yds
30VW	900/30	550/50	480/60	822/0.56	502/0.71	438/0.76	1525/65	1325/80	1125/100	1400/65	1200/80	1025/100	50lb 50yds
30VSX	525/30	320/50	280/60	480/0.56	292/0.71	256/0.76	775/80	650/100	550/130	525/80	450/100	380/130	100lb 50yds
50VSW	825/50	725/60	525/80	754/0.71	682/0.76	480/0.88	2000/80	1700/100	1425/130	1775/80	1500/100	1250/130	100lb 50yds
50VW	825/50	725/60	525/80	754/0.71	682/0.76	480/0.88	2000/80	1700/100	1425/130	1775/80	1500/100	1250/130	100lb 50yds
50VSX	500/50	440/60	330/80	457/0.71	402/0.76	301/0.88	875/130	775/150	650/200	650/130	600/150	475/200	130lb 50yds
70VS	650/80	525/100	420/130	594/0.88	480/1.00	384/1.20	1750/130	1600/150	1300/200	1600/130	1450/150	1175/200	100lb 50yds
80VSW	950/80	875/100	700/130	868/0.88	800/1.00	640/1.20	2900/130	2600/150	2125/200	2650/130	2400/150	1950/200	150lb 50yds
130VSX	975/130	850/150	525/200	891/1.20	777/1.40	480/1.55	3650/150	2975/200	2475/250	3450/150	2800/200	2425/250	150lb 50yds
TORQUE LEVER DRAG													
TRQ100LD	240/17	190/20	170/25	219/0.41	173/0.46	155/0.48	310/40	270/50	220/65	230/40	200/50	160/65	20lb 50yds
TRQ300LD	320/30	270/40	200/50	292/0.56	246/0.61	182/0.71	550/65	470/80	400/100	330/65	280/80	240/100	80lb 50yds
TORQUE STAR DRAG													
TRQ100	350/12	310/15	210/20	320/0.36	283/0.38	192/0.46	420/30	290/50	240/65	320/30	230/50	190/65	20lb 50yds
TRQ200	410/15	260/25	190/30	374/0.39	237/0.48	173/0.56	400/50	330/65	280/80	290/50	240/65	210/80	30lb 50yds
TRQ300	330/30	280/40	210/50	301/0.56	256/0.61	192/0.71	575/65	490/80	420/100	470/65	400/80	340/100	40lb 50yds
TRQ12	360/10	260/12	230/15	329/0.31	238/0.36	210/0.38	525/15	420/20	320/30	360/15	290/20	220/30	20lb 50yds
TRQ15	320/12	280/15	190/20	293/0.36	256/0.38	174/0.46	500/20	380/30	270/50	310/20	240/30	180/50	30lb 50yds
TRQ25	320/20	290/25	220/30	293/0.46	265/0.48	201/0.56	650/30	450/50	370/65	470/30	330/50	270/65	40lb 50yds
TRQ30	440/20	300/30	250/40	402/0.46	274/0.56	229/0.61	625/50	500/65	440/80	450/50	370/65	320/80	50lb 50yds
TRQ40	350/30	300/40	220/50	320/0.56	274/0.61	201/0.71	725/50	600/65	525/80	525/50	450/65	390/80	60lb 50yds
INTERNATIONAL BAITCAST													
965	210/12	190/15	160/17	192/0.36	173/0.38	146/0.41	420/15	340/20	260/30	NA	NA	NA	NA
975	270/12	240/15	210/17	246/0.36	246/0.38	192/0.41	440/20	330/30	270/40	NA	NA	NA	NA
975CS	270/12	240/15	210/17	246/0.36	246/0.38	192/0.41	440/20	330/30	270/40	NA	NA	NA	NA
975SLD	250/12	220/15	190/17	228/0.36	228/0.38	173/0.41	410/20	300/30	250/40	NA	NA	NA	NA
975LD	250/12	220/15	190/17	228/0.36	228/0.38	173/0.41	410/20	300/30	250/40	NA	NA	NA	NA
FATHOM STAR DRAG													
FTH12	360/10	260/12	230/15	325/0.30	235/0.36	210/0.38	525/15	420/20	320/30	360/15	290/20	220/30	20lb 50yds
FTH15	320/12	280/15	190/20	290/0.36	250/0.38	170/0.46	500/20	380/30	270/50	310/20	240/30	180/50	30lb 50yds
FTH25N	320/20	290/25	220/30	290/0.46	260/0.48	200/0.56	650/30	450/50	370/65	470/30	330/50	270/65	40lb 50yds
FTH30	440/20	300/30	250/40	400/0.46	270/0.56	225/0.61	625/50	500/65	440/80	450/50	370/65	320/80	50lb 50yds
FTH40	350/30	300/40	220/50	315/0.56	270/0.61	200/0.71	725/50	600/65	525/80	525/50	450/65	390/80	60lb 50yds
FATHOM LEVEL WIND													
FTH15LW	320/15	280/17	220/20	290/0.36	255/0.42	200/0.46	575/20	440/30	300/50	380/20	290/30	200/50	30lb 50yds
FTH20LW	320/17	260/20	230/25	290/0.42	240/0.46	210/0.48	675/20	500/30	350/50	480/20	360/30	250/40	30lb 50yds
FTH25LW	330/20	290/25	220/30	300/0.46	265/0.48	200/0.56	650/30	450/50	380/65	470/30	330/50	270/65	40lb 50yds
FTH40LW	390/30	330/40	240/50	360/0.56	300/0.61	220/0.71	825/50	675/65	575/80	650/50	550/65	470/80	50lb 50yds
FTH60LW	440/40	320/50	280/60	400/0.61	290/0.71	255/0.76	900/65	775/80	650/100	725/65	625/80	550/100	60lb 50yds
SENATOR													
BAJA - 113HN	350/30	300/40	220/50	350/0.56	300/0.61	220/0.71	725/50	600/65	525/80	600/50	500/65	440/80	40lb 50yds
112H2	450/20	300/30	250/40	411/0.46	274/0.56	228/0.61	625/50	525/65	450/80	500/50	420/65	360/80	40lb 50yds
113H2	440/30	370/40	270/50	402/0.56	338/0.62	246/0.71	925/50	750/65	650/80	800/50	650/65	575/80	40lb 50yds
113H2LH	440/30	370/40	270/50	402/0.56	338/0.62	246/0.71	925/50	750/65	650/80	800/50	650/65	575/80	40lb 50yds
113H2SP	500/35	420/46	270/61	402/0.56	338/0.62	246/0.71	NA	NA	NA	NA	NA	NA	NA
113H2LW	490/40	360/50	310/60	448/0.61	329/0.71	283/0.76	1200/50	1000/65	875/80	1075/50	900/65	775/80	40lb 50yds
114H2	450/50	390/60	290/80	411/0.71	356/0.76	265/0.86	1250/65	1075/80	925/100	1100/65	950/80	825/100	50lb 50yds
114H2SP	825/35	700/46	450/61	755/0.36	640/0.41	410/0.51	NA	NA	NA	NA	NA	NA	NA
114H2LW	560/50	490/60	360/80	512/0.71	448/0.76	329/0.86	1350/80	1150/100	950/130	1150/80	975/100	825/130	80lb 50yds
113L2	650/20	440/30	370/40	594/0.46	402/0.56	338/0.61	760/65	660/80	560/100	NA	NA	NA	NA
114L2	725/30	450/50	390/60	662/0.56	411/0.71	356/0.76	1075/80	925/100	750/130	NA	NA	NA	NA
115L2	1150/30	700/50	625/60	1051/0.56	640/0.71	571/0.76	1700/80	1450/100	1200/130	NA	NA	NA	NA
116L	1500/80	1100/80	875/100	1371/0.76	1005/0.86	800/1.00	4100/80	3500/100	2900/130	NA	NA	NA	NA
GRAPH-LITE													
GLD20	675/20	450/30	380/40	617/0.46	411/0.56	348/0.61	925/50	775/65	675/80	850/50	725/65	625/80	20lb 50yds
GLD30	600/30	500/40	370/50	548/0.56	457/0.61	380/0.71	1025/65	875/80	750/100	925/65	800/80	675/100	30 lb 50yds
GLD20II	675/20	450/30	380/40	617/0.46	411/0.56	347/0.61	925/50	775/65	675/80	850/50	725/65	625/80	20lb 50yds
GLD30II	600/30	500/40	370/50	548/0.56	457/0.61	338/0.71	1025/65	875/80	750/100	925/65	800/80	675/100	30 lb 50yds
GLD50II	775/40	550/50	490/60	708/0.61	502/0.71	448/0.76	1350/80	1150/100	875/150	1250/80	1075/100	825/150	40lb 50 yds

SPOOL CAPACITIES VARY BY LINE MANUFACTURER

MASTER CAPACITY CHART

MODEL	MONO CAPACITY (YDS/LB)			MONO CAPACITY (M/MM)			BRAID CAPACITY (YDS/LB)			BRAID CAPACITY WITH TOPSHOT (YDS/LB)			TOPSHOT
GS PERFORMANCE													
525MAG	280/12	240/15	170/20	256/0.36	219/0.38	155/0.46	450/20	340/30	240/50	NA	NA	NA	NA
535	410/15	290/20	260/25	375/0.38	285/0.46	237/0.48	750/20	575/30	470/40	NA	NA	NA	NA
545	380/20	340/25	250/30	347/0.46	310/0.48	228/0.56	750/30	600/40	525/50	NA	NA	NA	NA
555	400/25	300/30	250/40	365/0.48	274/0.56	228/0.61	725/40	625/50	525/65	NA	NA	NA	NA
SQUALL LEVER DRAG													
SQ30LD	390/20	350/25	260/30	360/0.46	320/0.48	240/0.56	1025/20	775/30	550/50	825/20	625/30	440/50	30lb 50yds
SQ40LD	490/25	380/30	300/40	450/0.48	330/0.56	275/0.61	1075/30	750/50	625/65	925/30	650/50	550/65	30lb 50yds
SQ40LDLH	490/25	380/30	300/40	450/0.48	330/0.56	275/0.61	1075/30	750/50	625/65	925/30	650/50	550/65	30lb 50yds
SQ50LD	500/30	420/40	310/50	460/0.56	385/0.61	280/0.71	1050/50	875/65	750/80	925/50	775/65	650/80	40lb 50 yds
SQ60LD	500/40	370/50	330/60	460/0.61	340/0.71	300/0.76	1050/65	900/80	775/100	875/65	750/80	650/100	60lb 50yds
SQ60LDLH	500/40	370/50	330/60	460/0.61	340/0.71	300/0.76	1050/65	900/80	775/100	875/65	750/80	650/100	60lb 50yds
SQUALL STAR DRAG													
SQ12	270/12	230/15	160/20	247/0.36	210/0.38	146/0.46	525/15	430/20	320/30	NA	NA	NA	NA
SQ15	280/15	240/17	190/20	256/0.38	219/0.41	174/0.48	500/20	380/30	270/50	NA	NA	NA	NA
GT LEVER DRAG													
320LD	380/15	270/20	180/30	347/0.38	338/0.46	164/0.56	700/20	525/30	370/50	NA	NA	NA	NA
330LD	430/20	290/30	250/40	393/0.38	265/0.56	228/0.61	875/30	600/50	500/65	NA	NA	NA	NA
GT LEVEL WIND													
310G12	380/12	330/15	230/20	347/0.36	301/0.38	210/0.46	600/20	460/30	375/40	NA	NA	NA	NA
310GT2LC	380/12	330/15	230/20	347/0.38	301/0.38	210/0.46	600/20	460/30	375/40	NA	NA	NA	NA
320G12	410/15	290/20	190/30	374/0.38	265/0.46	173/0.56	775/20	575/30	400/50	NA	NA	NA	NA
320GT2LC	410/15	290/20	190/30	374/0.38	265/0.46	173/0.56	775/20	575/30	400/50	NA	NA	NA	NA
321G12	410/15	290/20	190/30	374/0.38	265/0.46	173/0.56	775/20	575/30	400/50	NA	NA	NA	NA
330G12	450/20	330/30	250/40	411/0.46	301/0.56	228/0.61	900/30	625/50	525/65	NA	NA	NA	NA
340G12	650/20	440/30	370/40	594/0.46	402/0.56	338/0.61	925/50	750/65	650/80	NA	NA	NA	NA
345G12	675/20	575/30	490/40	800/0.46	525/0.56	448/0.61	1200/50	1000/65	875/80	NA	NA	NA	NA
DEFFIANCE LEVEL WIND													
DFN20LW	450/12	395/15	275/20	410/0.36	360/0.38	250/0.46	725/20	550/30	450/40	NA	NA	NA	NA
DFN25LW	330/20	300/25	225/30	300/0.46	275/0.48	205/0.56	660/30	550/40	450/50	NA	NA	NA	NA
DFN40LW	500/20	340/30	285/40	460/0.46	310/0.56	260/0.61	800/40	700/50	580/65	NA	NA	NA	NA
DFN30	390/25	290/30	250/40	355/0.48	265/0.56	230/0.61	850/30	700/40	600/50	NA	NA	NA	NA
LEVEL WIND													
220GTO	420/15	290/20	190/30	384/0.38	265/0.46	173/0.56	770/20	580/30	400/50	NA	NA	NA	NA
230GTO	460/20	300/30	260/40	420/0.46	274/0.56	237/0.61	925/30	640/50	525/65	NA	NA	NA	NA
500L	450/20	300/30	250/40	411/0.46	274/0.56	228/0.61	900/30	625/50	525/65	800/30	550/50	460/65	20lb 50yds
9M	250/15	220/17	180/20	228/0.38	201/0.41	164/0.46	470/20	350/30	240/50	NA	NA	NA	NA
209M	360/17	290/20	190/30	329/0.41	265/0.46	173/0.56	575/30	400/50	330/65	NA	NA	NA	NA
209MLH	360/17	290/20	190/30	329/0.41	265/0.46	173/0.56	575/30	400/50	330/65	NA	NA	NA	NA
209LC	360/17	290/20	190/30	329/0.41	265/0.46	173/0.56	575/30	400/50	330/65	NA	NA	NA	NA
309M	450/20	300/30	250/40	411/0.46	274/0.56	228/0.61	625/50	525/65	450/80	NA	NA	NA	NA
LOW PROFILE													
SAR64LP	200/12	170/14	115/17	182/0.36	155/0.37	105/0.41	310/15	200/20	180/30	NA	NA	NA	NA
PUR64LP	200/12	170/14	115/17	182/0.36	155/0.37	105/0.41	310/15	200/20	180/30	NA	NA	NA	NA
TORQUE SPINNING													
TRQS5-G	340/12	300/15	210/20	310/0.36	274/0.38	192/0.46	550/20	400/30	290/50	460/20	340/30	240/50	15lb 50yds
TRQS7-G	490/15	340/20	300/25	448/0.38	310/0.46	274/0.48	470/50	390/65	340/80	400/50	330/65	290/80	20lb 50yds
TRQS9-G	490/20	440/25	330/30	448/0.46	402/0.48	301/0.56	575/65	480/80	425/100	500/65	430/80	370/100	25lb 50yds
TRQS5-B	340/12	300/15	210/20	310/0.36	274/0.38	192/0.46	550/20	400/30	290/50	460/20	340/30	240/50	15lb 50yds
TRQS7-B	490/15	340/20	300/25	448/0.38	310/0.46	274/0.48	470/50	390/65	340/80	400/50	330/65	290/80	20lb 50yds
TRQS9-B	490/20	440/25	330/30	448/0.46	402/0.48	301/0.56	575/65	480/80	425/100	500/65	430/80	370/100	25lb 50yds
TRQS5-BBLS	340/12	300/15	210/20	310/0.36	274/0.38	192/0.46	550/20	400/30	290/50	460/20	340/30	240/50	15lb 50yds
TRQS7-BBLS	490/15	340/20	300/25	448/0.38	310/0.46	274/0.48	470/50	390/65	340/80	400/50	330/65	290/80	20lb 50yds
TRQS9-BBLS	490/20	440/25	330/30	448/0.46	402/0.48	301/0.56	575/65	480/80	425/100	500/65	430/80	370/100	25lb 50yds
CONQUER SPINNING													
CQR2000	250/4	185/6	130/8	230/0.20	170/0.25	120/0.28	250/8	210/10	180/15	NA	NA	NA	NA
CQR4000	260/8	200/10	165/12	240/0.28	180/0.31	150/0.36	280/15	180/20	140/30	NA	NA	NA	NA
CQR5000	250/12	190/15	170/17	230/0.36	175/0.38	155/0.41	350/20	270/30	220/40	NA	NA	NA	NA
CQR7000	250/15	210/17	170/20	230/0.38	190/0.41	155/0.46	325/30	280/40	250/50	NA	NA	NA	NA
CQR8000	390/17	310/20	270/25	352/0.41	274/0.46	242/0.48	600/30	420/50	350/65	NA	NA	NA	NA

MASTER CAPACITY CHART

SPOOL CAPACITIES VARY BY LINE MANUFACTURER

MODEL	MONO CAPACITY (YDS/LB)			MONO CAPACITY (M/MM)			BRAID CAPACITY (YDS/LB)			BRAID CAPACITY WITH TOPSHOT (YDS/LB)			TOPSHOT
SLAMMER SPINNING													
260	290/6	190/8	160/10	265/0.25	173/0.28	146/0.31	320/10	240/15	190/20	NA	NA	NA	NA
360	290/8	240/10	180/12	265/0.28	219/0.31	164/0.36	470/10	350/15	290/20	NA	NA	NA	NA
460	320/10	240/12	210/15	292/0.31	219/0.36	192/0.38	470/15	380/20	290/30	NA	NA	NA	NA
560	310/12	270/15	190/20	283/0.36	246/0.38	173/0.46	500/20	380/30	260/50	NA	NA	NA	NA
760	340/20	300/25	230/30	310/0.46	274/0.48	210/0.56	675/30	470/50	390/85	NA	NA	NA	NA
460L	320/10	240/12	210/15	292/0.31	219/0.36	192/0.38	470/15	380/20	290/30	NA	NA	NA	NA
560L	310/12	270/15	190/20	283/0.36	246/0.38	173/0.46	500/20	380/30	260/50	NA	NA	NA	NA
760L	340/20	300/25	230/30	310/0.46	274/0.48	210/0.56	675/30	470/50	390/85	NA	NA	NA	NA
SPINFISHER SPINNING													
420SSG	185/2	150/4	120/6	170/0.14	137/0.20	109/0.25	180/6	150/8	130/10	NA	NA	NA	NA
430SSG	300/4	240/6	180/8	274/0.20	219/0.25	146/0.28	300/8	260/10	200/15	NA	NA	NA	NA
440SSG	260/8	220/10	160/12	237/0.28	201/0.31	146/0.36	420/10	320/15	260/20	NA	NA	NA	NA
450SSG	300/10	220/12	190/15	274/0.31	201/0.36	173/0.38	440/15	360/20	270/30	NA	NA	NA	NA
550SSG	370/10	270/12	240/15	338/0.31	246/0.36	219/0.38	550/15	440/20	325/30	NA	NA	NA	NA
650SSM	360/12	320/15	220/20	329/0.36	292/0.38	201/0.46	575/20	440/30	300/50	NA	NA	NA	NA
750SSM	420/15	290/20	260/25	384/0.38	265/0.46	237/0.48	575/30	400/50	340/85	NA	NA	NA	NA
850SSM	380/20	340/25	250/30	347/0.46	310/0.48	228/0.56	750/30	525/50	440/85	NA	NA	NA	NA
950SSM	450/25	340/30	290/40	411/0.48	310/0.56	265/0.61	700/50	575/85	500/80	NA	NA	NA	NA
BATTLE SPINNING													
BTL1000	180/2	115/4	80/6	165/0.14	105/0.20	75/0.25	160/6	130/8	115/10	NA	NA	NA	NA
BTL2000	260/4	210/6	140/8	238/0.20	192/0.25	128/0.28	260/8	225/10	170/15	NA	NA	NA	NA
BTL3000	250/6	170/8	140/10	229/0.25	155/0.28	128/0.31	275/10	205/15	170/20	NA	NA	NA	NA
BTL4000	280/8	230/10	170/12	256/0.28	210/0.31	155/0.36	335/15	275/20	205/30	NA	NA	NA	NA
BTL5000	250/12	220/15	190/17	229/0.36	201/0.38	174/0.41	405/20	305/30	250/40	NA	NA	NA	NA
BTL6000	320/15	280/17	220/20	293/0.38	256/0.41	201/0.46	445/30	365/40	310/50	NA	NA	NA	NA
BTL7000	390/17	310/20	280/25	357/0.41	283/0.46	256/0.48	505/40	430/50	360/85	NA	NA	NA	NA
BTL8000	390/20	350/25	260/30	357/0.46	320/0.48	238/0.56	550/50	450/85	390/80	NA	NA	NA	NA
SARGUS SPINNING													
SG1000	180/2	115/4	80/6	165/0.14	105/0.20	75/0.25	160/6	130/8	115/10	NA	NA	NA	NA
SG2000	260/4	210/6	140/8	238/0.20	192/0.25	128/0.28	260/8	225/10	170/15	NA	NA	NA	NA
SG3000	250/6	170/8	140/10	229/0.25	155/0.28	128/0.31	275/10	205/15	170/20	NA	NA	NA	NA
SG4000	280/8	230/10	170/12	256/0.28	210/0.31	155/0.36	335/15	275/20	205/30	NA	NA	NA	NA
SG5000	250/12	220/15	190/17	229/0.36	201/0.38	174/0.41	405/20	305/30	250/40	NA	NA	NA	NA
SG6000	320/15	280/17	220/20	293/0.38	256/0.41	201/0.46	445/30	365/40	310/50	NA	NA	NA	NA
SG7000	390/17	310/20	280/25	357/0.41	283/0.46	256/0.48	505/40	430/50	360/85	NA	NA	NA	NA
SG8000	390/20	350/25	260/30	357/0.46	320/0.48	238/0.56	550/50	450/85	390/80	NA	NA	NA	NA
FIERCE SPINNING													
FRC1000	180/2	115/4	80/6	165/0.14	105/0.20	75/0.25	160/6	130/8	115/10	NA	NA	NA	NA
FRC2000	260/4	210/6	140/8	238/0.20	192/0.25	128/0.28	260/8	225/10	170/15	NA	NA	NA	NA
FRC3000	250/6	170/8	140/10	229/0.25	155/0.28	128/0.31	275/10	205/15	170/20	NA	NA	NA	NA
FRC4000	280/8	230/10	170/12	256/0.28	210/0.31	155/0.36	335/15	275/20	205/30	NA	NA	NA	NA
FRC5000	250/12	220/15	190/17	229/0.36	201/0.38	174/0.41	405/20	305/30	250/40	NA	NA	NA	NA
FRC6000	320/15	280/17	220/20	293/0.38	256/0.41	201/0.46	445/30	365/40	310/50	NA	NA	NA	NA
FRC7000	390/17	310/20	280/25	357/0.41	283/0.46	256/0.48	505/40	430/50	360/85	NA	NA	NA	NA
FRC8000	390/20	350/25	260/30	357/0.46	320/0.48	238/0.56	550/50	450/85	390/80	NA	NA	NA	NA
PURSUIT SPINNING													
PUR3000	250/6	170/8	140/10	229/0.25	155/0.28	128/0.31	270/10	210/15	170/20	NA	NA	NA	NA
PUR4000	270/8	220/10	160/12	247/0.28	201/0.31	146/0.36	320/15	260/20	200/30	NA	NA	NA	NA
PUR5000	250/12	220/15	190/17	229/0.36	201/0.38	174/0.41	400/20	300/30	250/40	NA	NA	NA	NA
PUR6000	320/15	280/17	220/20	293/0.38	256/0.41	201/0.46	440/30	360/40	310/50	NA	NA	NA	NA
PUR7000	390/17	310/20	280/25	357/0.41	283/0.46	256/0.48	500/40	430/50	360/85	NA	NA	NA	NA
PUR8000	390/20	350/25	260/30	357/0.46	320/0.48	238/0.56	550/50	450/85	390/80	NA	NA	NA	NA

RODS TO REELS COMBINATION CHART

ROD MODEL REEL MODEL

BLUEWATER CARNAGE

CARBW1220S70	SG5000, SG6000, BTL5000, BTL6000, 650SSM, 580, 580L, CQR5000, CQR6000, CQR7000, TRQ55, TRQ57
CARBW1530S70	SG8000, SG7000, BTL6000, BTL7000, 650SSM, 750SSM, 760, 760L, CQR7000, CQR8000, TRQ65-7
CARBW3060S70	SG7000, SG8000, BTL7000, BTL8000, 750SSM, 850SSM, 850SSM, 760, 760L, CQR7000, CQR8000, TRQ57, TRQ59
CARBW700XL	SQL12, SQL15, FTH12, FTH15, TRQ12, TRQ15
CARBW800XL	SQL12, SQL15, FTH12, FTH15, TRQ12, TRQ15
CARBW700ML	SQL15, FTH15, FTH25N, TRQ15, TRQ25
CARBW700M	SQL15, FTH15, FTH25N, FTH30, TRQ15, TRQ25, TRQ30
CARBW900M	SQL15, FTH15, FTH25N, FTH30, TRQ15, TRQ25, TRQ30
CARBW700H	FTH30, FTH40, TRQ30, TRQ40
CARBW760L	FTH30, TRQ40, BAJA, 12V5X, 16V5X
CARBW760H	FTH40, TRQ40, BAJA, 12V5X, 16V5X
CARBW1525C70LB	SQL12, SQL15, SQL30LD, FTH12, FTH15, FTH25N, TRQ12, TRQ15, TRQ25
CARBW2040C70LB	SQL15, SQL30LD, SQL40LD, FTH25N, FTH30, FTH40, TRQ15, TRQ25, TRQ30, TRQ40, 12V
CARBW1530C66	112H2, SQL12, SQL15, SQL30LD, FTH20LW, FTH25LW, FTH25N, FTH30, TRQ12, TRQ15
CARBW2050C66	113, 114, 113IN, SQL30LD, SQL40LD, FTH40LW, FTH40, TRQ40
CARBW3060C66	114, FTH40LW, FTH40LW, SQL40LD, SQL50LD, 12VS, 12V5X
CARBW50100C66	115L2, FTH60LW, SQL50, SQL60, 12V5X

BLUEWATER CARNAGE JIGGING

CARJG2050S70	SG4000, BTL4000, 450SSG, 460, CQR4000
CARJG3080S66	SG4000, BTL4000, 450SSG, 460, CQR4000
CARJG65100S64	SG5000, BTL5000, 550SSG, 560, CQR5000
CARJG80130S60	SG5000, SG6000, BTL5000, BTL6000, 650SSM, CQR5000, CQR6000, CQR7000
CARJG200S56	SG7000, SG8000, BTL7000, BTL8000, 750SSM, 850SSM, 760, CQR5000, CQR6000, CQR7000, CQR8000, TRQ57
CARJG3080C66	SQL12, SQL15, FTH12, FTH15, FTH25N, TRQ12, TRQ15, TRQ25
CARJG50100C66	SQL12, SQL15, FTH12, FTH15, FTH25N, TRQ12, TRQ15, TRQ25
CARJG65100C62	FTH15, FTH25N, FTH30, FTH40, TRQ15, TRQ25, TRQ30, TRQ40
CARJG80130C58	FTH30, FTH40, TRQ30, TRQ40
CARJG200C56	FTH30, FTH40, TRQ30, TRQ40

LEGION INSHORE

LEGIN812S69	SG2000, BTL2000, 420SSG, 260, CQR2000
LEGIN815S66	SG3000, BTL3000, 430SSG, 260, CQR2000
LEGIN815S70	SG3000, BTL3000, 430SSG, 360, CQR2000
LEGIN815S73	SG3000, BTL3000, 430SSG, 360, CQR2000
LEGIN815S76	SG3000, BTL3000, 430SSG, 360, CQR2000
LEGIN815S80	SG3000, BTL3000, 430SSG, 360, CQR2000
LEGIN1017S70	SG4000, BTL4000, 440SSG, 460, CQR4000
LEGIN1017S76	SG4000, BTL4000, 440SSG, 460, CQR4000
LEGIN1017S80	SG4000, BTL4000, 440SSG, 460, CQR4000
LEGIN1220S70	SG5000, BTL5000, 450SSG, 560, 560L, CQR5000
LEGIN1220S76	SG5000, BTL5000, 450SSG, 560, 560L, CQR5000
LEGIN1530S70	SG5000, SG6000, BTL5000, BTL6000, 550SSG, 580, 580L, CQR5000, CQR6000, CQR7000
LEGIN1530S76	SG5000, SG6000, BTL5000, BTL6000, 550SSG, 580, 580L, CQR5000, CQR6000, CQR7000
LEGIN2040S70	SG7000, SG8000, BTL7000, BTL8000, 750SSG, 850SSG, 760, 760L, CQR7000, CQR8000, TRQ55, TRQ57
LEGIN2040S76	SG7000, SG8000, BTL7000, BTL8000, 750SSG, 850SSG, 760, 760L, CQR7000, CQR8000, TRQ55, TRQ57
LEGIN2040S80	SG7000, SG8000, BTL7000, BTL8000, 750SSG, 850SSG, 760, 760L, CQR7000, CQR8000, TRQ55, TRQ57
LEGIN1017C70	PUR64LP, SAR64LP
LEGIN1220C70	PUR64LP, SAR64LP, SQL12, SQL15, 965, TRQ12, TRQ15
LEGIN1530C70	PUR64LP, SAR64LP, SQL12, SQL15, 965, 975, TRQ12, TRQ15, TRQ25

ALLEGIANE INSHORE

ALLIN812S69	FRC2000, SG2000
ALLIN815S70	PUR3000, FRC3000, SG3000
ALLIN815S73	PUR3000, FRC3000, SG3000
ALLIN1017S70	PUR3000, PUR4000, FRC3000, FRC4000, SG3000, SG4000
ALLIN1017S76	PUR3000, PUR4000, FRC3000, FRC4000, SG3000, SG4000
ALLIN1220S70	PUR4000, PUR5000, FRC4000, FRC5000, SG4000, SG5000
ALLIN1530S70	PUR5000, PUR6000, FRC5000, FRC6000, SG5000, SG6000
ALLIN15C70	PUR64LP
ALLIN1017C70	PUR64LP
ALLIN1530C70	PUR64LP

TORQUE SURF

TS1220S80	SG4000, SG5000, BTL4000, BTL5000, 450SSG, 550SSG, 460, 560, CQR4000, CQR5000, TRQ55
TS1220S90	SG5000, SG6000, BTL5000, BTL6000, 550SSG, 650SSM, 560, CQR5000, CQR6000, CQR7000, TRQ55
TS1530S10	SG8000, SG7000, BTL6000, BTL7000, 650SSM, 750SSM, 580, CQR7000, TRQ65, TRQ57
TS1530S11	SG8000, SG7000, BTL6000, BTL7000, 650SSM, 750SSM, 760, CQR7000, TRQ67
TS2040S12	SG7000, SG8000, BTL7000, BTL8000, 750SSM, 850SSM, 850SSM, 760, CQR8000, TRQ57, TRQ59
TS1220C10	SQL12, SQL15, FTH12, FTH15, FTH25N, TRQ12, TRQ15, TRQ25
TS1530C11	SQL15, FTH15, FTH25N, TRQ15, TRQ25
TS2040C12	FTH30, FTH40, TRQ30, TRQ40

POWERSTICK SURF

PSS1220S80	PUR6000, PUR5000, FRC4000, FRC5000, SG4000, SG5000, BTL4000, BTL5000, 450SSG, 550SSG
PSS1220S90	PUR6000, PUR6000, FRC5000, FRC6000, SG5000, SG6000, BTL5000, BTL6000, 550SSG
PSS1530S10	PUR6000, PUR7000, FRC6000, FRC7000, SG6000, SG7000, BTL6000, BTL7000
PSS1530S11	PUR6000, PUR7000, FRC6000, FRC7000, SG6000, SG7000, BTL6000, BTL7000
PSS2040S12	PUR7000, PUR8000, FRC7000, FRC8000, SG7000, SG8000, BTL7000, BTL8000

SPINFISHER SURF

SBG9808	PUR6000, PUR5000, FRC4000, FRC5000, SG4000, SG5000, BTL4000, BTL5000, 450SSG, 550SSG
SBG9809	PUR5000, PUR6000, FRC5000, FRC6000, SG5000, SG6000, BTL5000, BTL6000, 550SSG
SBG9810	PUR6000, PUR7000, FRC6000, FRC7000, SG6000, SG7000, BTL6000, BTL7000
SBG9811MH	PUR6000, PUR7000, FRC6000, FRC7000, SG6000, SG7000, BTL6000, BTL7000
SBG9812H	PUR7000, PUR8000, FRC7000, FRC8000, SG7000, SG8000, BTL7000, BTL8000

The background of the advertisement features four Penn fishing reels arranged in a circular pattern. The reels have black frames with prominent yellow accents on the spools and side plates. The central logo is a red shield with a blue border, containing the word "PENN" in white, bold, sans-serif capital letters with a blue outline. Below the logo, the slogan "LET THE BATTLE BEGIN" is written in white, bold, sans-serif capital letters. Underneath the slogan is the website "pennreels.com" in a smaller, grey, lowercase sans-serif font. At the bottom of the image, there is a line of small, white, sans-serif text providing company information.

PENN

LET THE BATTLE BEGIN

pennreels.com

PENN FISHING TACKLE MANUFACTURING COMPANY, PHILADELPHIA, PA
Pure Fishing, a subsidiary of Jarden Corporation (NYSE: JAH)