


**INSTRUCTION
MANUAL
and
REPAIR PARTS
LIST**



"The Reels of Champions"

**CATALOG
No. 23B**

PRINTED IN U. S. A.

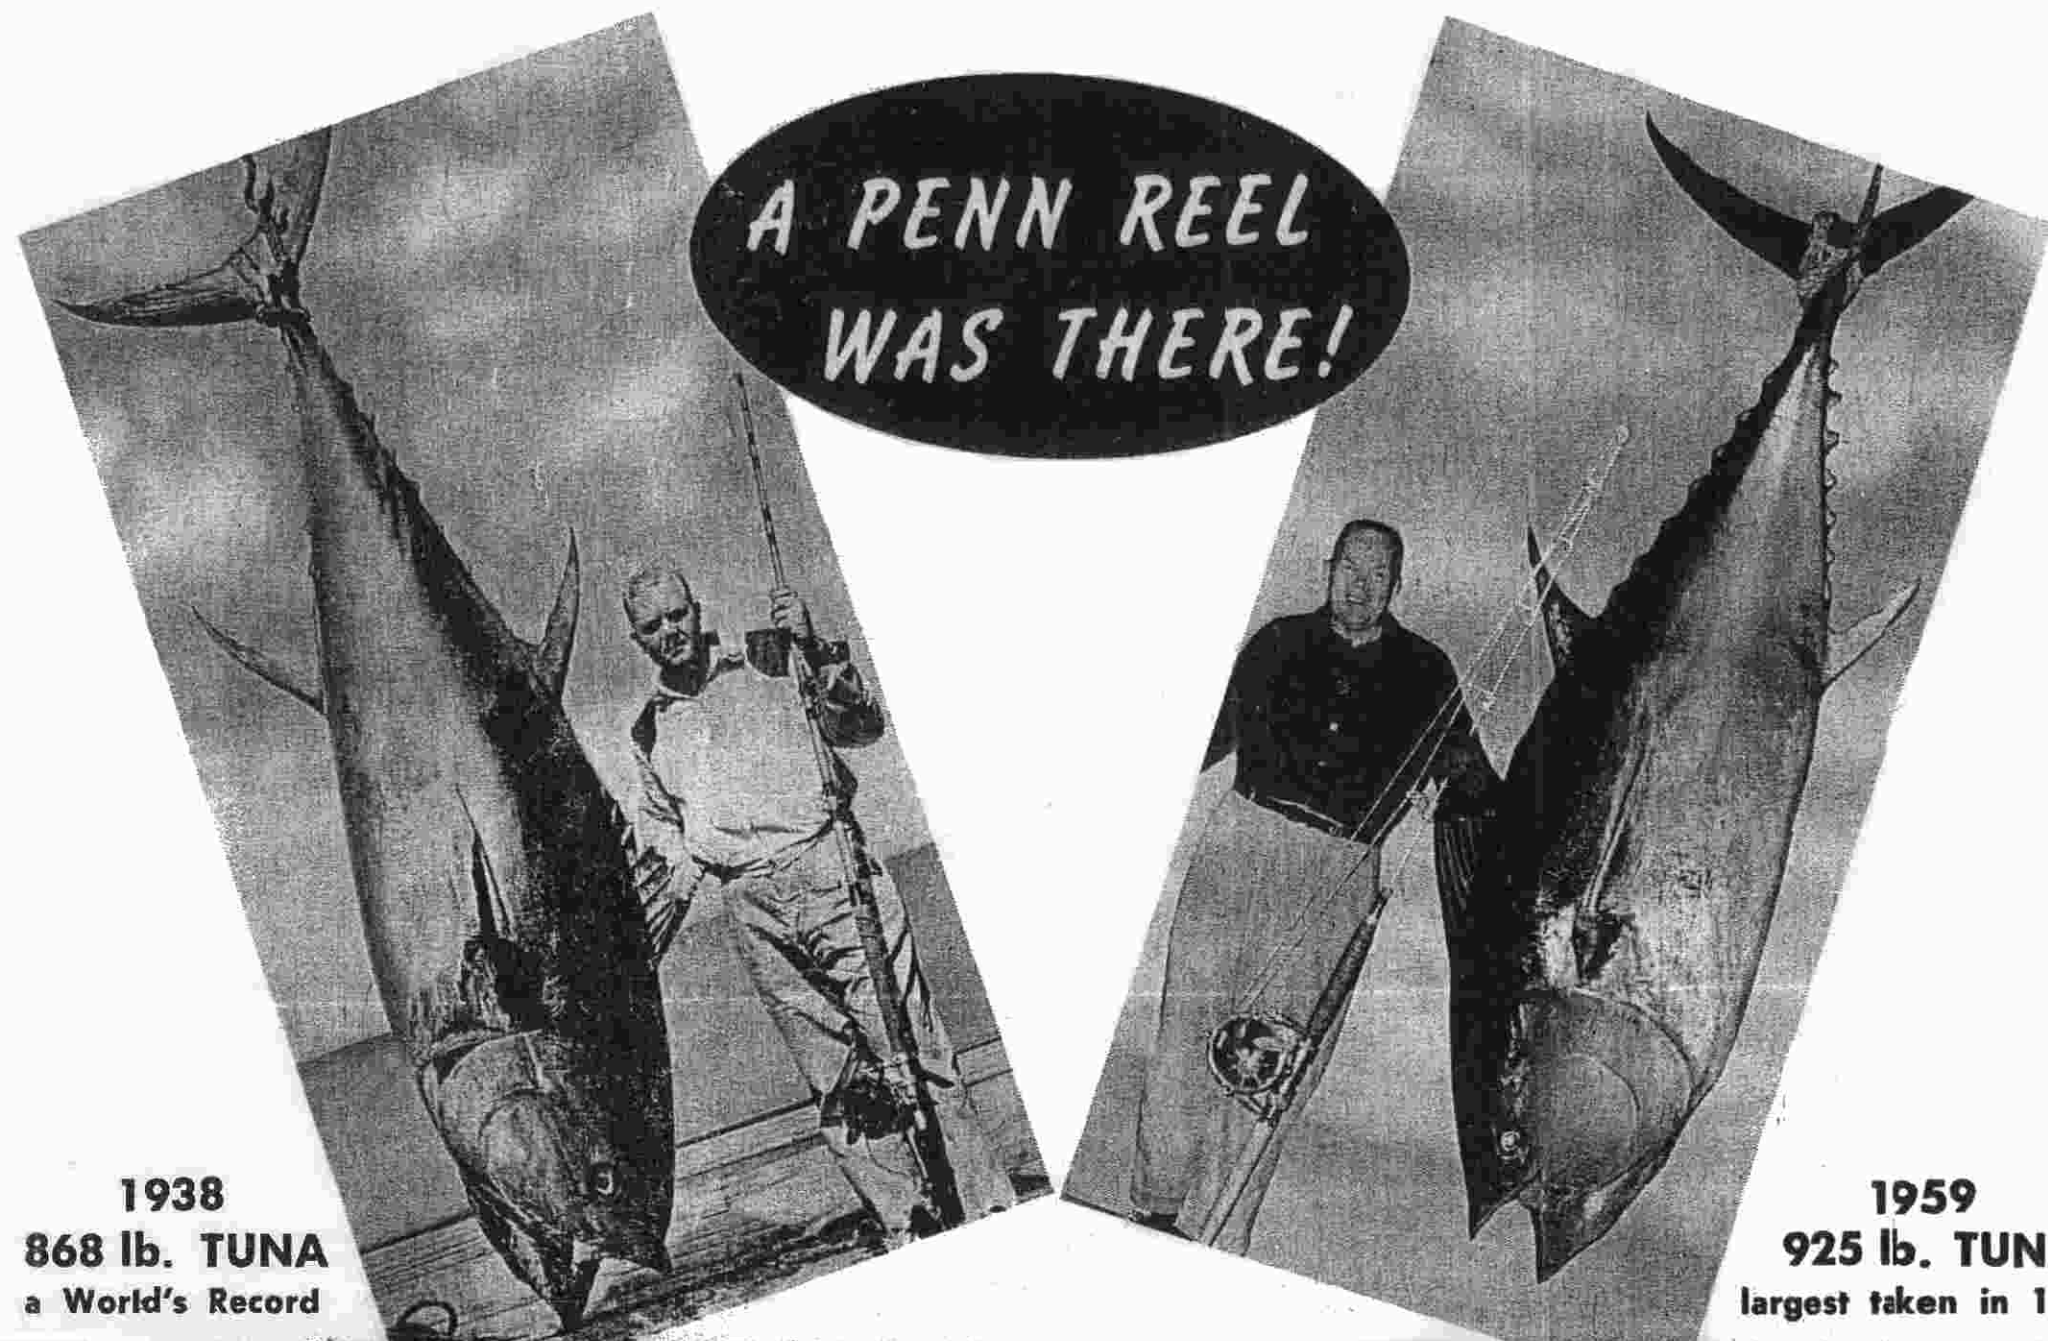

**TWO GIANT TUNA RECORDS 20 YEARS APART
ON PENN SENATOR REELS by J. FRANK JOHNSON Port Washington, L. I., N. Y.**

J. Frank Johnson, a veteran big-game fisherman, says: "After 20 yrs. of fishing for Giant Tuna my confidence in Penn Reels has not changed."

PENN FISHING TACKLE MFG. CO.

3028 W. HUNTING PARK AVENUE, PHILADELPHIA 32, PA.

TABLE OF CONTENTS

NEW REELS

	Page
Penn Jigmaster No. 500	3
Penn Master Mariner No. 349	4
Penn Leveline No. 350	5

BIG-GAME REELS

Penn Senators 4/0 to 3/0	6-7
--------------------------------	-----

SMALL SENATOR REELS

Penn Senators. 1/0 to 3/0	8
---------------------------------	---

BOTTOM FISHING

Penn Long Beach No. 60 to 68	9
------------------------------------	---

TROLLING

Penn Sailfisher No. 130	10
Penn Super Mariner No. 49	10
Penn Mariner No. 149	10

SURF FISHING

Penn Squidder No. 140	11
Penn Surfmasters No. 100 to 250	12
Penn Silver Beach No. 99	12
Penn Beachmaster No. 155 to 165	13

BAY FISHING

	Page
Penn Baymaster No. 180	13

MONOFIL REELS®

Penn Monofil Level-Wind No. 9-109-209	14
Penn Monofil No. 25-26-27	15

UNIVERSAL REELS

Penn Delmar No. 285	16
Penn Sea-Boy No. 85	16
Penn Sea-Mate, Sea-Scamp No. 78-79	16

PENN ACCESSORIES

Parts Kits, Penn Lube, etc.	17
----------------------------------	----

REEL PARTS

Illustration of Parts	18
Parts Lists	19 to 28
How to Order Parts	28
Penn Reel Handles	28

SERVICE INFORMATION


Free-Spool Clutch	29
Star-Drag Chart	30
Care of Your Reel	31

GUARANTEE

Your Penn Reel is a fine mechanism, precision built of the best materials and expertly assembled by skilled craftsmen, to give many years of dependable performance, if given reasonable care and treatment. It is unconditionally guaranteed against faulty materials and workmanship.

JIGMASTER No. 500

FOR FASTER RETRIEVE AND LIVELIER LURE ACTION...

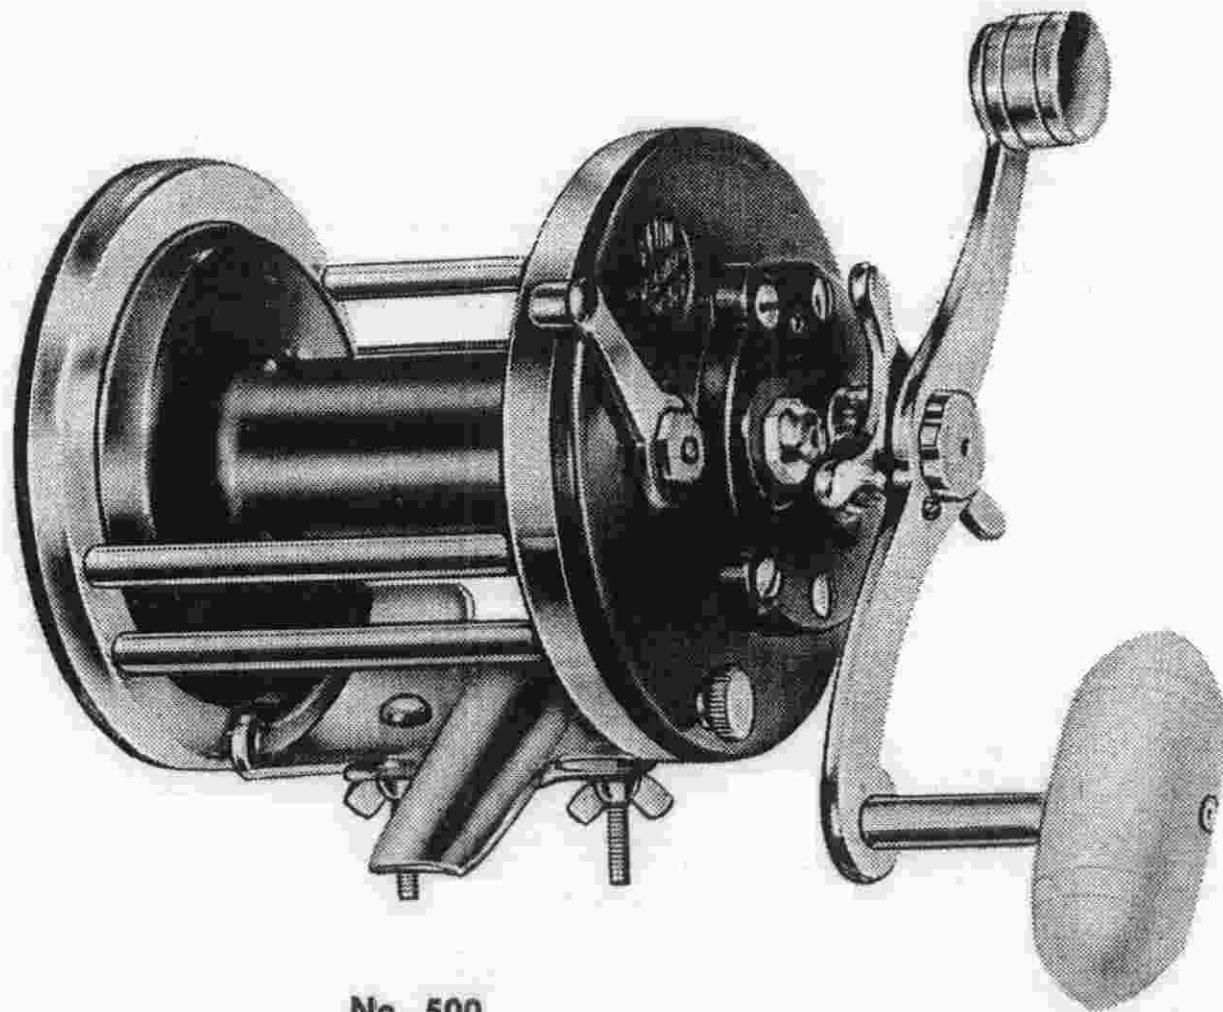

No. 500

Game fish go for live-action lures, and if you're "Squidding" in the Atlantic, or "Jigging" in the Pacific, you'll enjoy the extra strikes and catches resulting from the extra speed and action of the JIGMASTER reel.

The combination of a newly designed, high-gear arrangement and large arbor, makes this fast casting and retrieving reel a real joy to use.

Precision-fitted spools in the JIGMASTER enable this reel to handle monofilament and other lines.

For quick spool change, the JIGMASTER is made with One-Screw Take-Apart. With Model 500 two lightweight spools are furnished, each with "Easy-Thumb" flanges, for sure-cast control. Model 500M has one chromed brass spool. Both models have Star drag, Torpedo handle, Rod clamps, one-shot oiler lubrication.

Plate Diam. 3" Spool Width 2-7/16"

Gear Ratio 4 to 1

Large-Diameter Arbor

Easy-Thumb Spool Flanges

No. 500	Two plastic spools, Plate Dia. 3",	Approx. Cap.	200 yd. No. 9 Linen
	Spool Width 2-7/16".		230 yd. 36 lb. Nylon
List Price	\$17.50		300 yd. 20 lb. Monofilament

No. 500M	with one metal spool.
	cap. 300 yards of No. 9 linen,
	or 36 lb. nylon, 500 yards of
	20 lb. monofilament line.

List Price	\$17.95
------------	---------

SEE THEM AT YOUR SPORTING GOODS DEALER

For Strength and Stamina...

**PENN'S NEW
NARROW SPOOL REEL**

No. 349

MASTER MARINER

4 MODELS

*an extra rugged reel
... with features never before
incorporated in a single reel*

1. One-piece cast metal spool
2. Oversize brake lining drag
3. Six point support reel stand
4. Harness lugs
5. CHOICE of gear ratio—High or Standard
6. Choice of convertible star drag
7. Improved gear bridge—stronger gears
8. Double leverage handle on high gear ratio model


APPROX. LINE CAPACITY

400 YARDS 27 lb. Linen — 225 yd., 50 lb. Dacron

Will handle wire, lead core, mono, linen and nylon

4 MODELS

No. 349 gear ratio 2-1/3 to 1. Wt. 37 oz.	\$28.00
No. 349C as 349 but with convertible star drag	29.00
No. 349H gear ratio 3 1/4 to 1. Wt. 37 oz.	28.00
No. 349HC as 349H but with convertible star drag	29.00

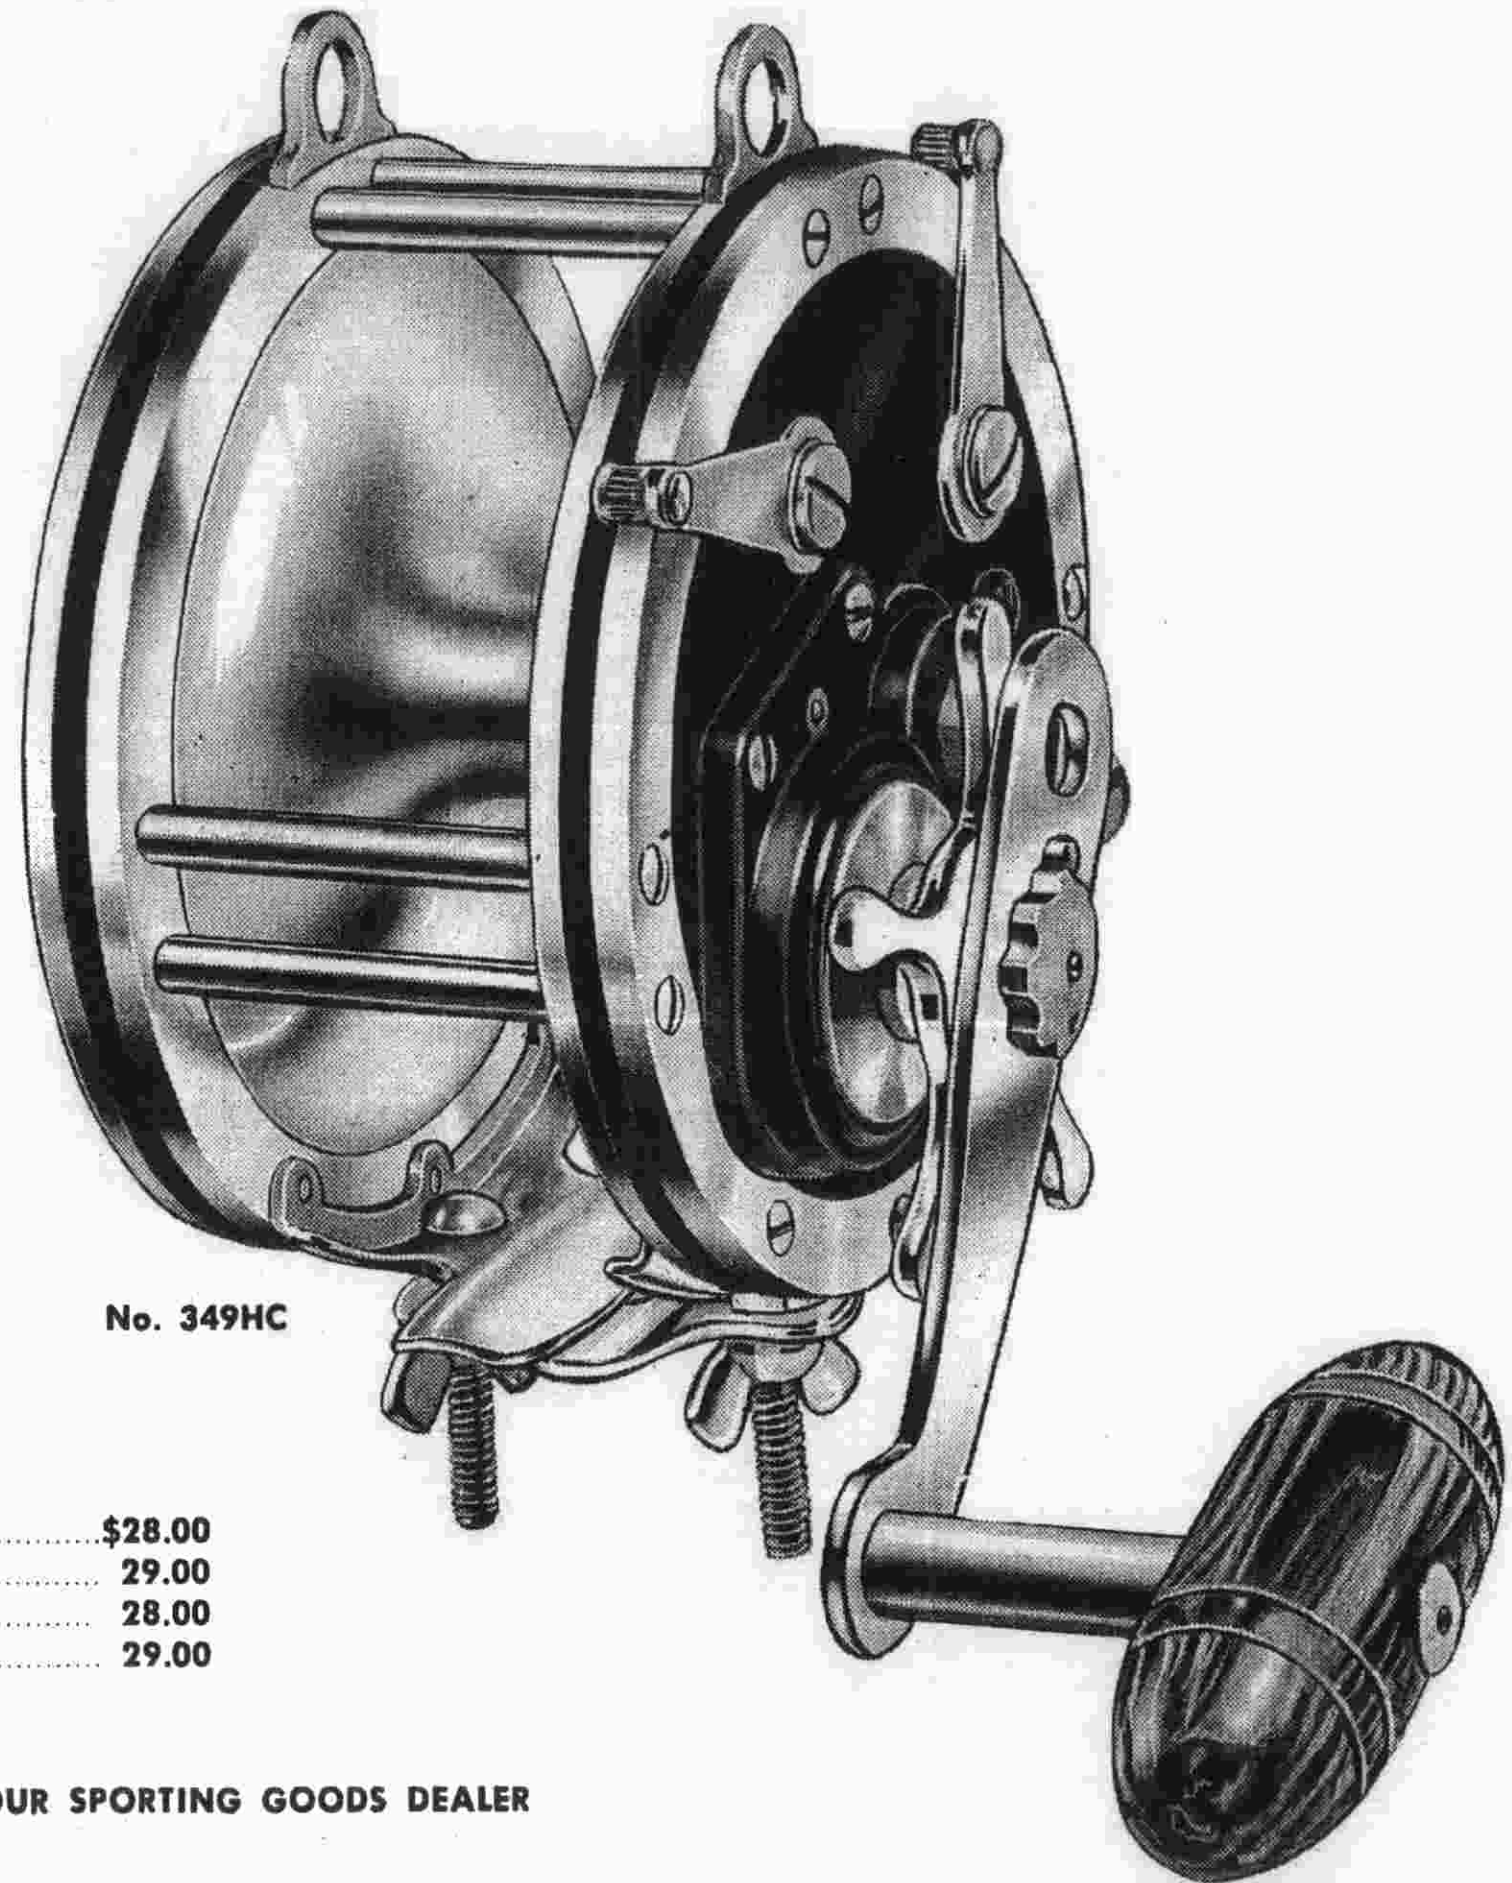

No. 349HC

SEE THEM AT YOUR SPORTING GOODS DEALER


A LEVEL-WIND REEL with a BRAIN!

HOW THE AUTOMATIC LEVELINE WORKS

The line coming into the Leveline reel follows the low point on the spiral bar, over which it travels. As the gear driven spiral bar revolves, the low point travels from side to side. With each complete turn of the spiral bar, the line is carried across the spool and back to its starting point, producing the level winding.

In casting, the reel is in free spool and the spiral bar is disengaged and in no way interferes with the cast.

Slight line tension is necessary for the line to remain at the low point on the spiral bar. Also, the rod guide nearest the reel should be at least 30 inches above it, to allow sufficient room for the line to swing freely with the spiral bar.

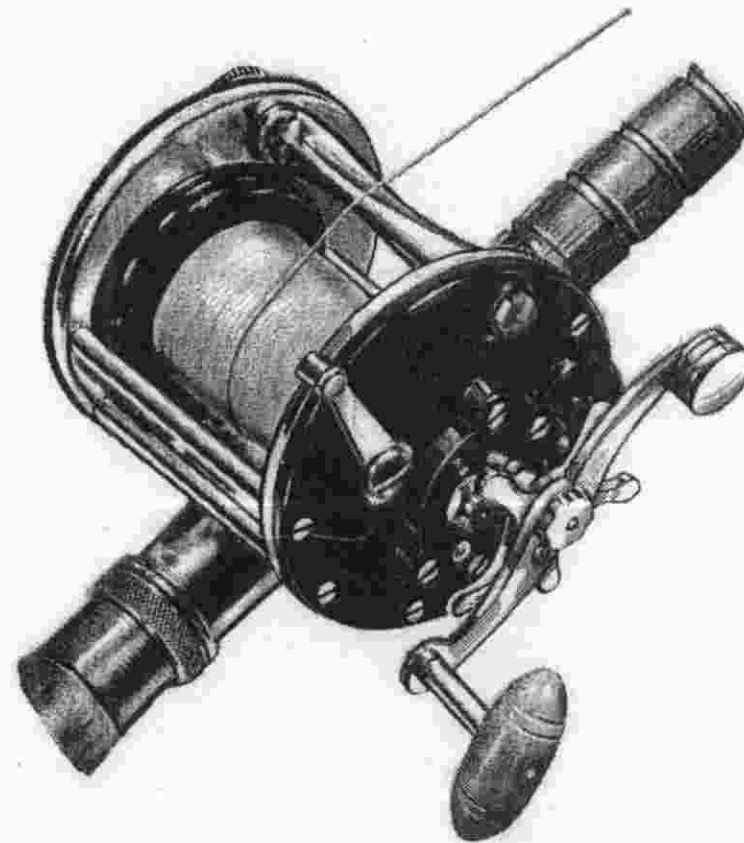

No. 350

- **GEAR RATIO 3 to 1**
- **STAR DRAG**
- **HEAVILY CHROMIUM PLATED**

the NEW Penn **"LEVELINE"**

AUTOMATIC LEVEL-WIND
for Surf, Boat or Trolling

Here's an entirely new patented principle of level - winding. The Spiral Bar or "BRAIN" works only on the retrieve.

GREAT FOR DAY — TERRIFIC FOR NIGHT FISHING!

Now the fisherman can forget the line and concentrate on his fishing. No more worry about line bunching up on reel spool—because **THE LINE IS LAID LEVEL EVERY TIME** it is reeled in.

Enjoy longer, smoother casts and carefree retrieve!


No. 350	Reinforced Plastic Spool,	List Price
	Cap. 200 yds. #9, 225 yds. 36 lb. Dacron	
	Wt. 19 oz.	\$20.00
No. 350M	with Chromed Brass Metal Spool,	
	Cap. 250 yds. #9, 250 yds. 36 lb. Dacron	
	Wt. 20 oz.	20.95
	Not available in left hand models	

PENN SENATOR REELS


Both experienced sport fishermen and professional charter boat captains select Penn Senators for complete satisfaction. One-piece cast bronze spools, a special feature of Senator Reels, are now standard equipment in sizes from 4/0 to 16/0.

Velvet smooth, but powerful star drag systems, help fight fish and protect tackle. Tough brake lining is used in the star drags of Senators 4/0 to 16/0, inclusive, for extra heavy service.


Penn Senator reels have hard steel driving gears and stainless steel pinion gears. Models from 4/0 to 16/0, inclusive, have harness lugs. Forward rod braces are supplied with models 9/0 to 16/0, inclusive. The 14/0 and 16/0 models have double braces for extra rigidity. Spools of 10/0 to 16/0, inclusive, run in aircraft-quality ball bearings, for smooth action. All Senator models have comfortable torpedo handles, hand polished chromium plated external metal parts, and one-shot lubrication systems.

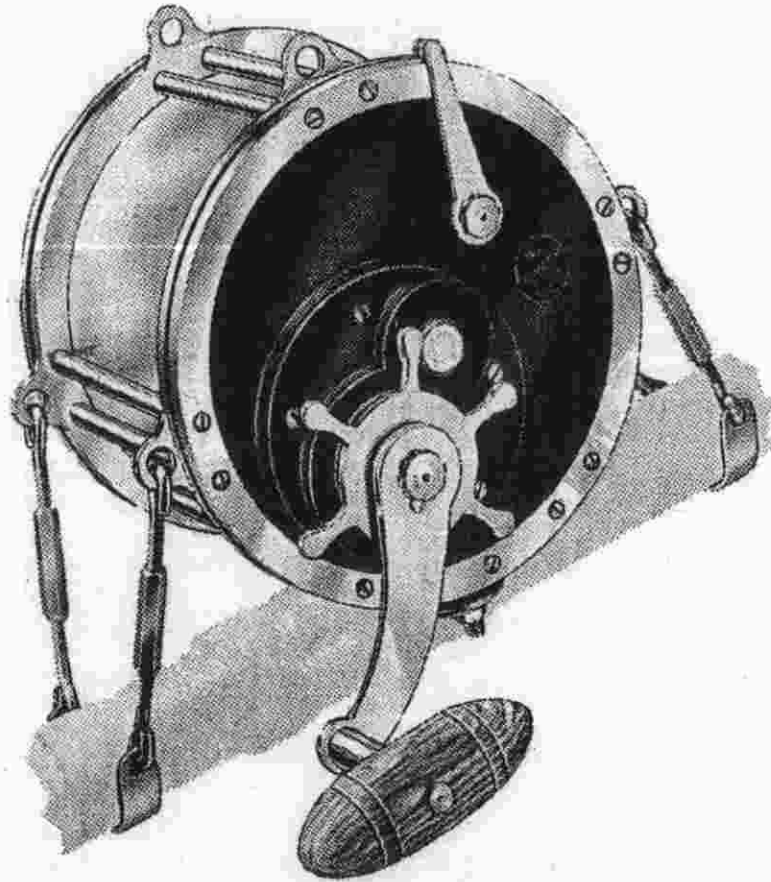

PENN SENATOR 14/0

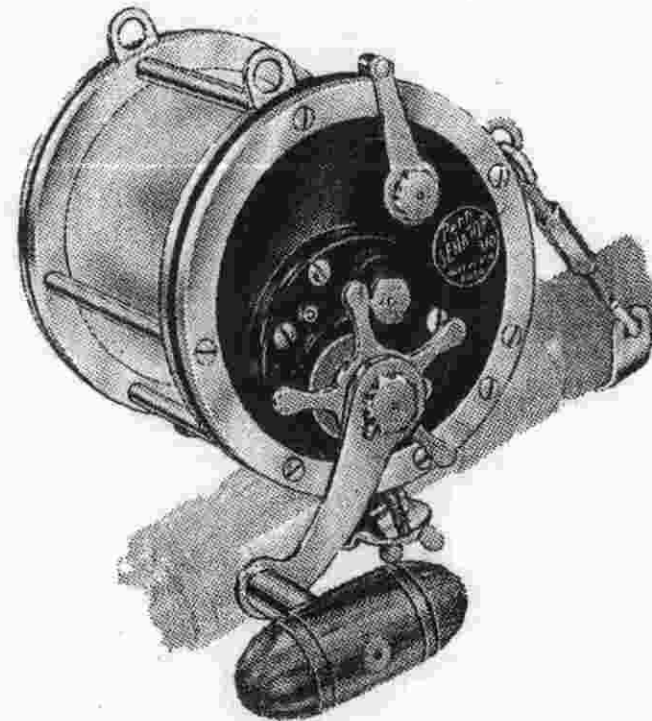


PENN SENATOR 9/0

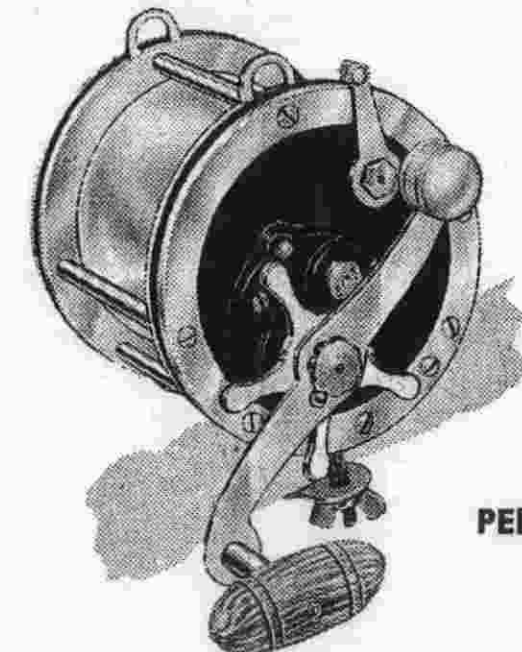

PEN SENATOR 4/0

NEW! Solid One-Piece Cast Metal Spool

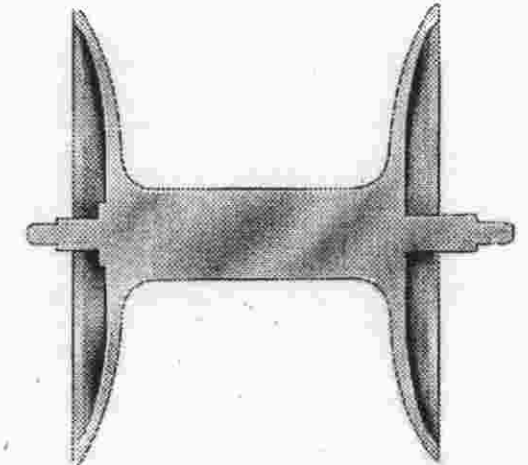

Penn Senator models from 4/0 to 16/0, now feature one-piece cast spools as standard equipment. These superior strength spools are made from one-piece bronze castings, precision machined and heavily chromium plated, to provide corrosion protection and a satin smooth finish. Many large tuna and billfish have been taken on these spools without spool distortion or breakage resulting.

SEE THEM AT YOUR SPORTING GOODS DEALER

FOR BIG GAME FISHING

SPECIFICATIONS


No. of Reel	Size of Reel	Style of Trolling	Gear Ratio	Plate Diam.	Spool Width	Weight of Reel	List Price
No. 113	4/0	Light	2:1	3 $\frac{5}{8}$ "	2-7/16"	30 oz.	\$27.50
No. 114	6/0	Light	2.1:1	4 $\frac{1}{8}$ "	2 $\frac{3}{4}$ "	48 oz.	37.95
No. 115	9/0	Medium	2.5:1	4 $\frac{5}{8}$ "	3 $\frac{1}{4}$ "	64 oz.	49.00
No. 116A	10/0	Med. Heavy	2:1	5 $\frac{3}{4}$ "	3 $\frac{1}{4}$ "	100 oz.	75.00
No. 116	12/0	Heavy	2:1	5 $\frac{3}{4}$ "	4"	110 oz.	85.00
No. 117	14/0	Ex. Heavy	1.6:1	7"	4"	162 oz.	125.00
No. 118	16/0	Ex. Heavy	1.6:1	7"	5"	174 oz.	150.00

Left Hand Models extra \$3.00 for 113, 114, 115

Left Hand Models extra \$5.00 for 116A, 116, 117, 118


APPROXIMATE LINE CAPACITY IN YARDS

	30 lb. Dacron	50 lb. Dacron	80 lb. Dacron	130 lb. Dacron	27 lb. Linen	36 lb. Linen	45 lb. Linen	72 lb. Linen	108 lb. Linen	162 lb. Linen
4/0	450	250	150		500	400	300			
6/0		400	250		700	600	500	250		
9/0			400	300			700	375		
10/0			650	400			1000	600	400	
12/0			800	500				700	550	450
14/0			1150	750				1300	900	600
16/0			1250	950				1675	1000	750

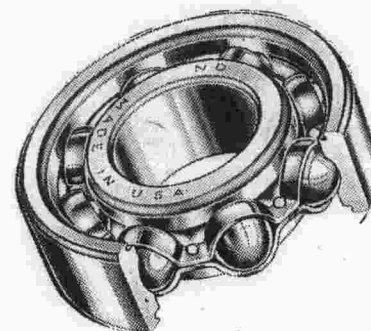

AIRCRAFT-QUALITY BALL-BEARINGS

Help produce smooth performance in Senator Models 10/0 to 16/0 inclusive.

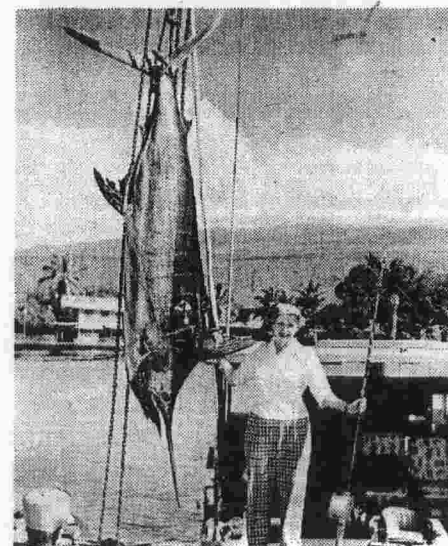


NEW WOMENS WORLDS RECORD FOR PACIFIC BLUE MARLIN was set by Miss OLA M. EUBANKS, of Kansas City, Mo., November 10, 1959, at Kona, Hawaii, with this 354 lb. catch made with a 12/0 Penn SENATOR REEL and 80 lb. test line.

SEE THEM AT YOUR SPORTING GOODS DEALER

PENN SENATOR REELS

FOR LIGHT-TACKLE TROLLING

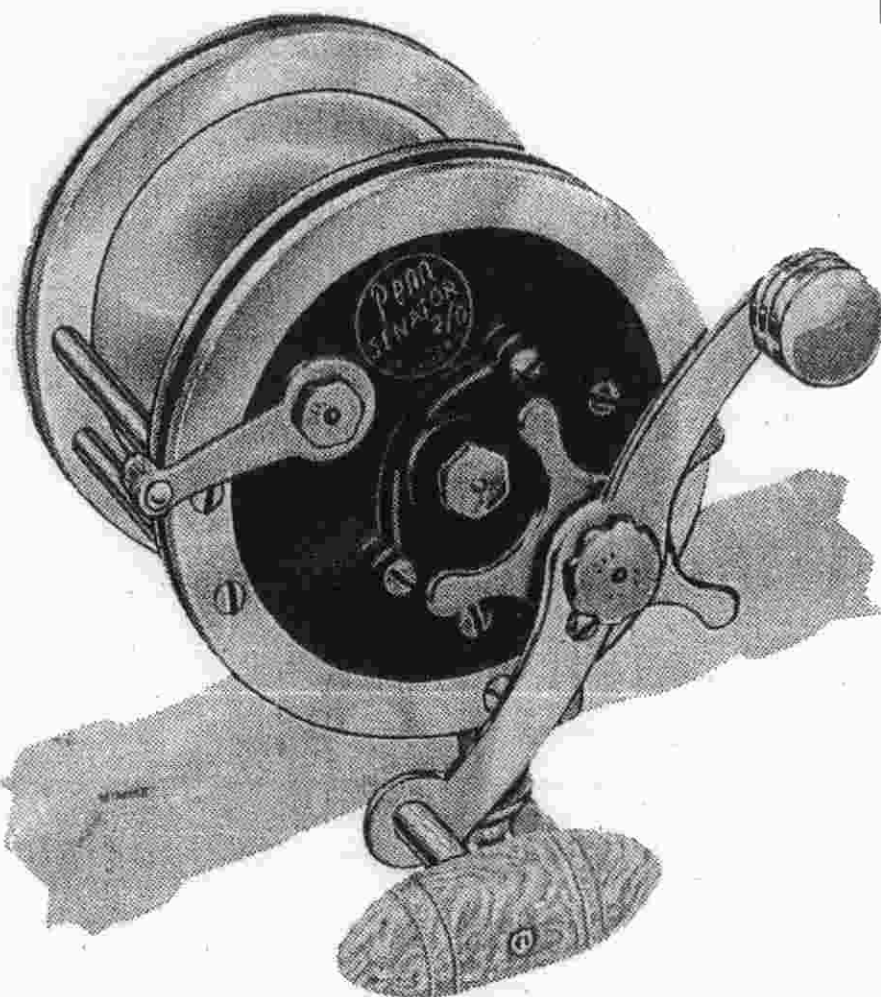

111-2/0

These Senator reels are available for 4-6, 5-9, and 6-12 light-tackle fishing. All models are equipped with our patented free spool clutch. Penn's famous, smooth acting star drag gives a wide range of drag control and safeguards against breaking of light lines. Hard steel gears withstand years of severe usage. All models have double metal bound end plates and attached rod clamps, to assure safety of the reel under all conditions. The frames of all Penn Senator reels are polished and heavily chromium plated. Our patented one-shot lubrication system, combined with built-in oil reservoirs, safeguard perfect performance and assures smooth action of all moving parts.

SPECIFICATIONS


No. and Size of reel	Plate Diam.	Spool Width	Gear Ratio	Weight of Reel	List Price
No. 110-1/0	3-1/16"	15/8"	3 to 1	18 oz.	\$17.00
No. 111-2/0	3 1/4"	1-13/16"	2 1/4 to 1	22 oz.	19.50
No. 112-3/0	3 1/4"	2-7/16"	2 1/4 to 1	26 oz.	22.50
Left hand models extra \$1.50					

APPROX. LINE CAPACITY IN YARDS


	25 lb. Nylon Yds.	36 lb. Nylon Yds.	45 lb. Nylon Yds.	54 lb. Nylon Yds.	20 lb. Dacron Yds.	30 lb. Dacron Yds.	50 lb. Dacron Yds.	27 lb. Linen Yds.	36 lb. Linen Yds.	45 lb. Linen Yds.
1/0	300	200	150		450	225	150	225	175	125
2/0	350	275	200		500	250	150	300	225	175
3/0	500	400	250	200		350	200	400	300	250

SEE THEM AT YOUR SPORTING GOODS DEALER

FOR DEEP-SEA BOTTOM FISHING AND TROLLING

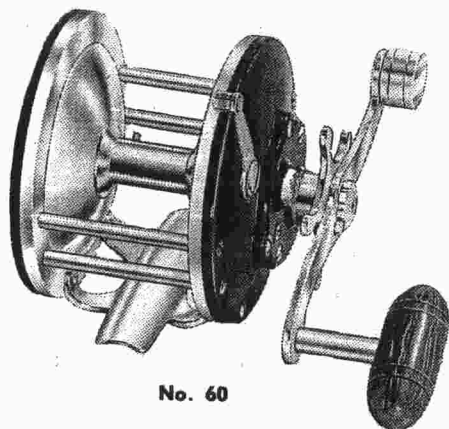

No. 60

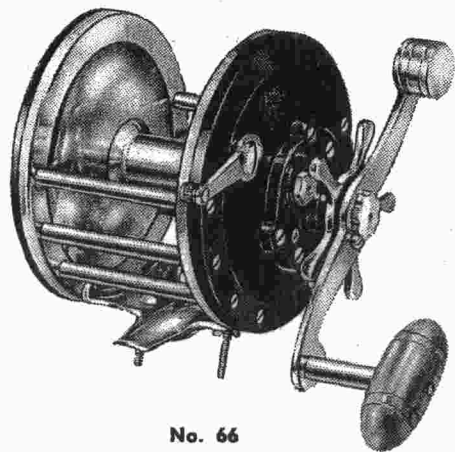

No. 66

Penn Long Beach reels comprise five models equipped with metal spools and Power Star Drag. The drag can be applied instantly without danger of stripping gears. Gear train consists of steel driving gear and stainless steel pinion gear. The Penn one-shot lubrication system safeguards perfect performance. Metal parts are heavily chromium plated and hand polished. The Super Long Beach models No. 66, 67 and 68 are equipped with rod clamps.

PENN LONG BEACH


	Approx. Line capacity in yards			Gear Ratio	Plate Diam.	Spool Width	Weight of reel	List Price
	27 lb. Linen	50 lb. Dacron	45 lb. Nylon					
No. 60	250 yds.	150 yds.	125 yds.	2½ to 1	3¼"	1-13/16"	19½ oz.	\$10.95
No. 65	300 yds.	200 yds.	150 yds.	2½ to 1	3¼"	2⅛"	20½ oz.	12.50
No. 66	400 yds.	225 yds.	160 yds.	2½ to 1	3⅝"	2⅛"	26 oz.	14.95
Left hand models extra								\$1.50

PENN SUPER LONG BEACH

	Approx. Line capacity in yards			Gear Ratio	Plate Diam.	Spool Width	Weight of reel	List Price
	36 lb. Linen	50 lb. Dacron	54 lb. Nylon					
No. 67	375 yds.	250 yds.	175 yds.	2½ to 1	3⅝"	2-7/16"	27 oz.	\$17.00
No. 68	450 yds.	300 yds.	200 yds.	2½ to 1	3⅝"	3"	29 oz.	18.50
Left hand models extra								\$1.50

SEE THEM AT YOUR SPORTING GOODS DEALER

FOR TROLLING WITH WIRE AND LEAD CORE LINES

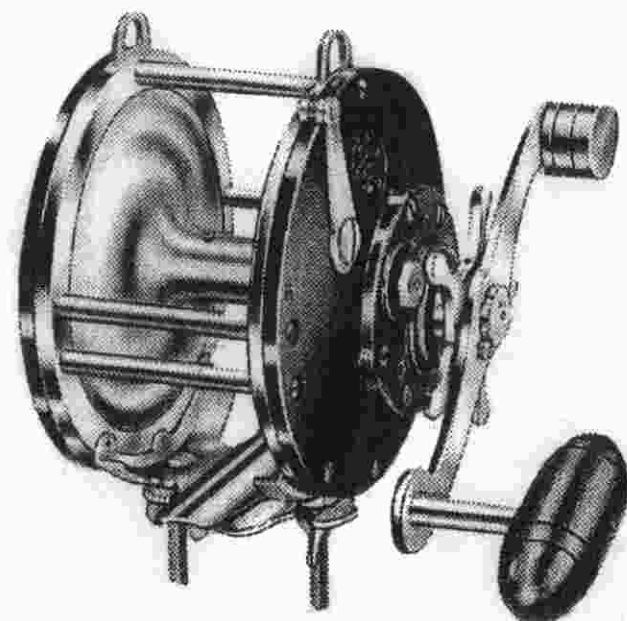

No. 130

PENN SAILFISHER

With Solid, One-Piece Cast Spool

Gear Ratio 3 to 1

For Trolling and Bottom Fishing

Here is an exceptionally strong reel with narrow, one-piece cast spool, fast retrieve and special features of ruggedness needed for sailfish, marlin, tuna, etc. The smooth acting star drag, extra heavy main and pinion gears, one-shot lubrication system, rod clamps, harness lugs and oversize torpedo handle merit the popularity these reels enjoy.

No. 130 Solid Cast Spool, approx. capacity 400 yd. No. 9, 200 yd. 50 lb. Dacron, 200 yd. 25 lb. lead core line. Weight 29 oz. Plate diameter 3 3/4". Spool width 1-13/16". Gear ratio 3 to 1 **\$21.00**
Left hand models extra **\$ 1.50**

PENN SUPER-MARINER

Gear Ratio 3 1/2 to 1


Penn Models 49 and 49M retrieve about 2 1/2 feet of line with each turn of the handle. Both models are equipped with the Convertible Star Drag and may be fished as a star drag or free spool reel. Gears are always in mesh and cannot strip. End plates are double metal bound. All exposed metal parts are polished and chromium plated.

List Price

No. 49 Convertible Star Drag, Plastic Spool, Wt. 29 oz. **\$18.95**
No. 49M Convertible Star Drag, Metal Spool, Wt. 32 oz. **\$20.95**
Left hand models extra **\$ 1.50**

APPROXIMATE CAPACITIES

Model	36 lb. Linen	18 lb. Lead Core	.024" Monel
49	225 yds.	150 yds.	200 yds.
49M	275 yds.	250 yds.	245 yds.

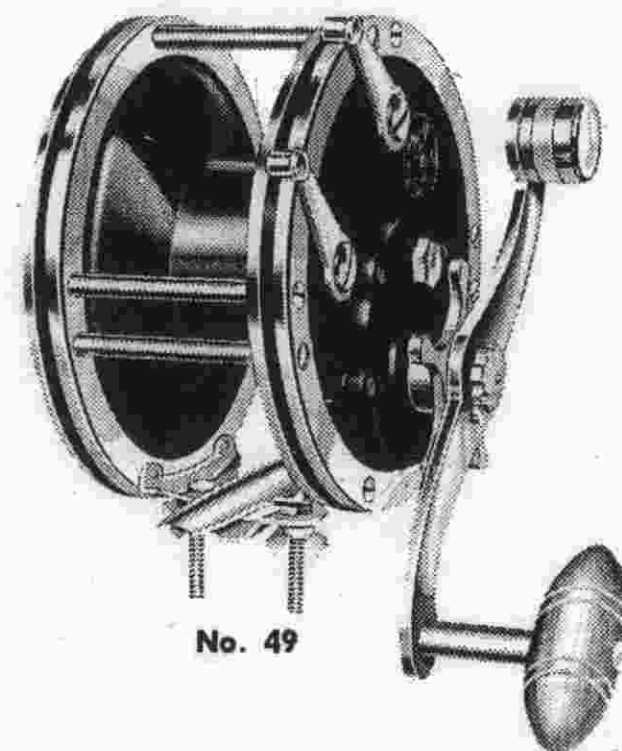

No. 49


PENN MARINER

Double Multiplying Gears

Penn models 149 and 149M are similar in general design and capacity to models 49 and 49M, but are without the convertible star drag feature. End plates have a chromium plated brass inside ring. Both models retrieve line quickly. All exposed metal parts are polished and chromium plated. Gear ratio 2.1 to 1. (Not illustrated.) List Price

No. 149 Star Drag, 225 yd. Plastic Spool **\$15.00**
No. 149M As above, with Chromium Plated, 275 yd. Metal Spool **17.00**
Left hand models extra **\$ 1.50**

SEE THEM AT YOUR SPORTING GOODS DEALER

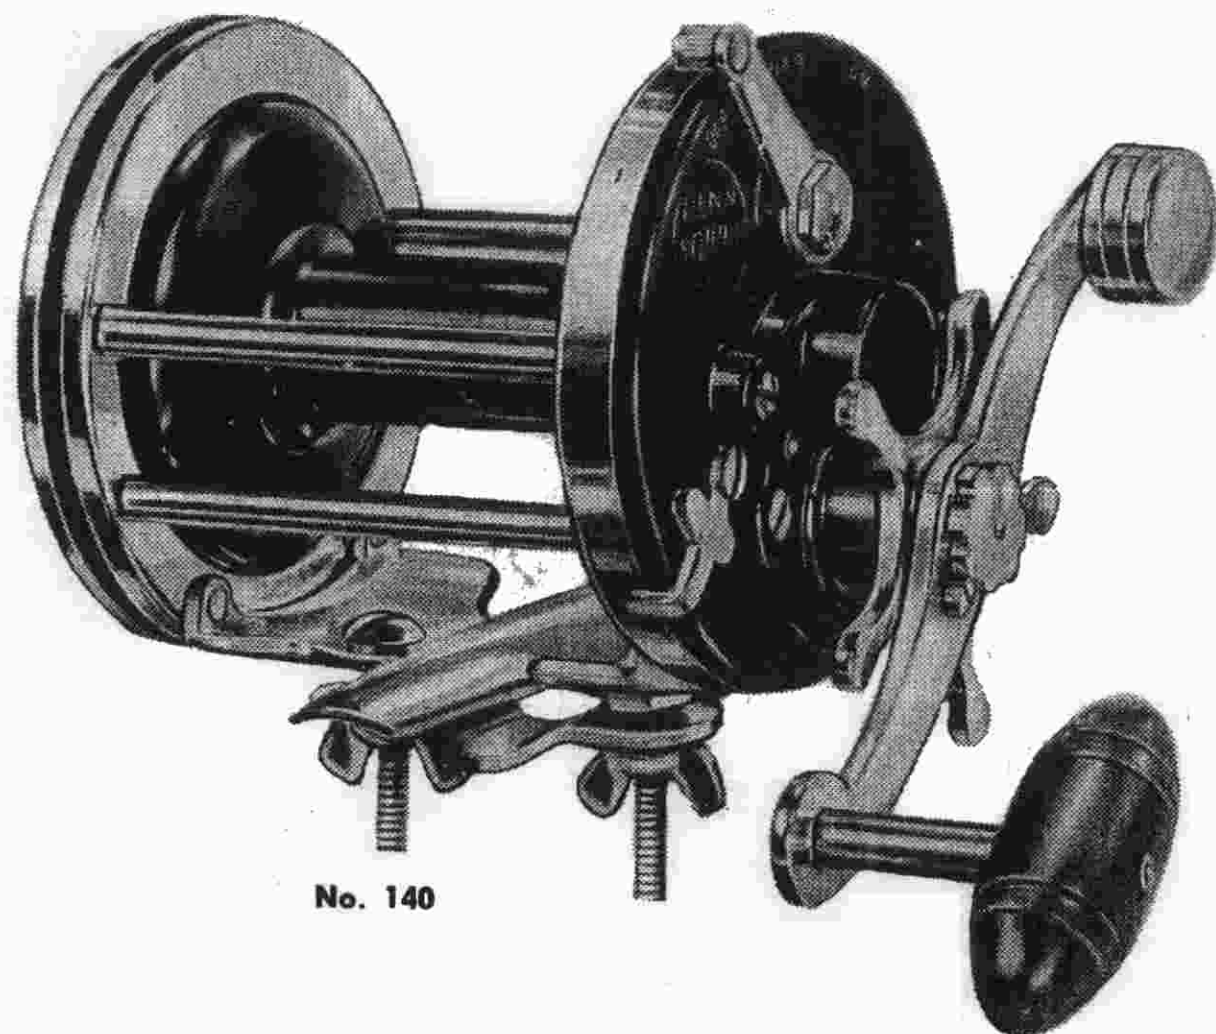

No. 140

PENN SQUIDDER

BALL BEARINGS — AIR BRAKE — CONVERTIBLE DRAG

The Penn Squidder has the casting ability of a tournament reel, yet is built to take the punishment of hard fishing. All external metal parts are heavily chrome plated.


Lightweight, rugged frame is $2\frac{3}{4}$ " in diameter. Spools for models 140 and 140M are $2\frac{7}{16}$ " wide; for models 145 and 145M spools are $2\frac{1}{8}$ " wide.

SPECIFICATIONS


Model	Capacity		Wt.	Plate Diam.	Spool Width	Gear Ratio
	27 lb. Linen	36 lb. Dacron				
140	200 yds.	200 yds.	17½ oz.	2¾"	2-7/16"	3-1/3 to 1
145	150 yds.	150 yds.	16½ oz.	2¾"	2⅛"	3-1/3 to 1
140M	250 yds.	250 yds.	18 oz.	2¾"	2-7/16"	3-1/3 to 1
145M	200 yds.	200 yds.	16 oz.*	2¾"	2⅛"	3-1/3 to 1

			List Price
No. 140	2 Plastic Spools, Capacity 200 yd., 27 lb. Linen		\$25.00
No. 145	2 Plastic Spools, Capacity 150 yd., 27 lb. Linen		24.00
No. 140M	1 Metal Spool, Capacity 250 yd., 27 lb. Linen		25.00
No. 145M	1 Metal Spool, Capacity 200 yd., 27 lb. Linen		24.00
Left hand models extra			\$ 2.00


All Penn Squidder models feature:

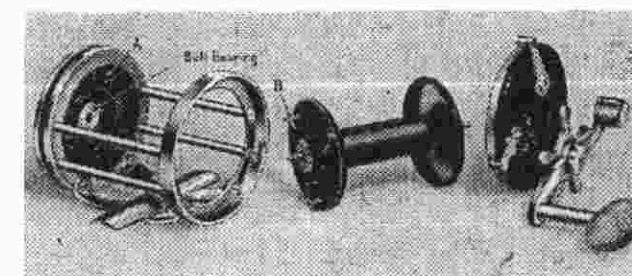

One-Screw Take-Apart

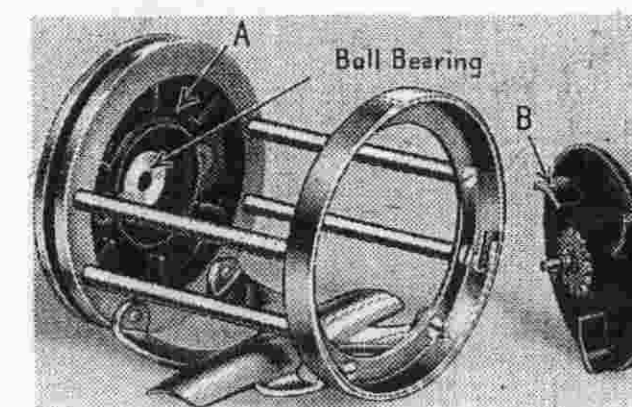

Air Brake Fin Spools




Ball Bearings
3-1/3 to 1 Gear Ratio
Wide Frame
Convertible Star Drag

SEE THEM AT YOUR SPORTING GOODS DEALER

PENN SILVER BEACH

For Surf Casting, Squidding, Pier and Bridge Fishing

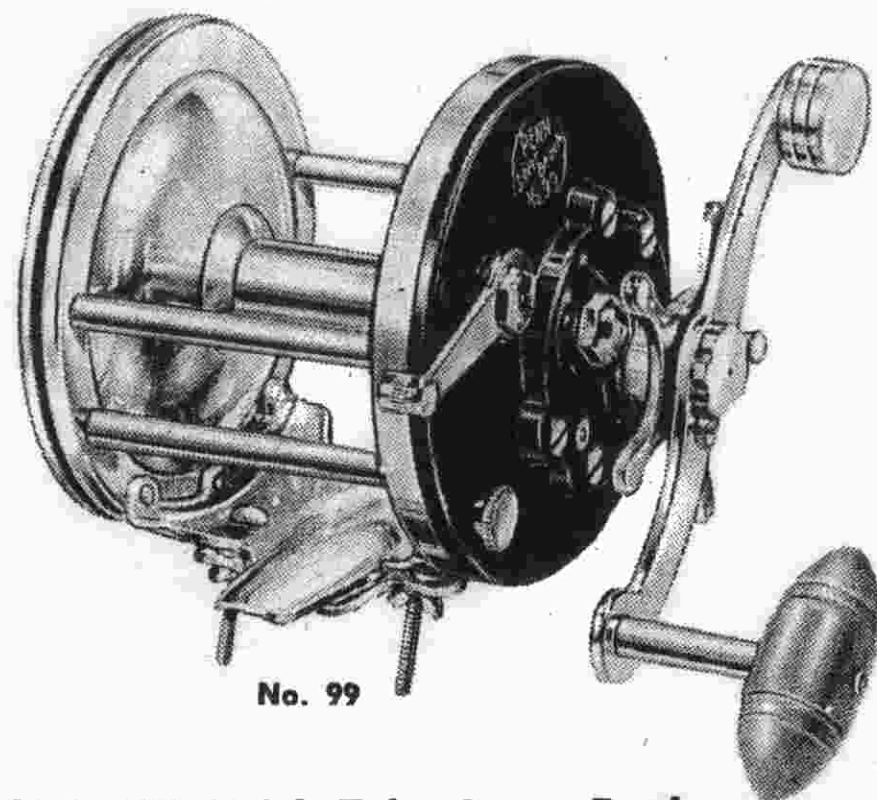

No. 99

The "3 in 1" Quick Take-Apart Reel

1 PLASTIC — 1 METAL SPOOL

Combination surf, boat and trolling reel, equipped with one plastic and one metal spool. Penn Model 99 is an ideal all-around reel for casting, trolling and deep-sea fishing.


Casting Spool, Plastic, Approx. Cap. 200 yd. 36 lb. Dacron.

Trolling Spool, Chromed Brass, Approx. Cap. 250 yd., 36 lb. Dacron.

Weight of Reel — 22½ oz.

Gear Ratio 3 to 1, Plate diameter 3-1/16", Spool width 2½".

	List Price
No. 99 with 2 Spools	\$18.00
Left hand models extra	\$ 1.50

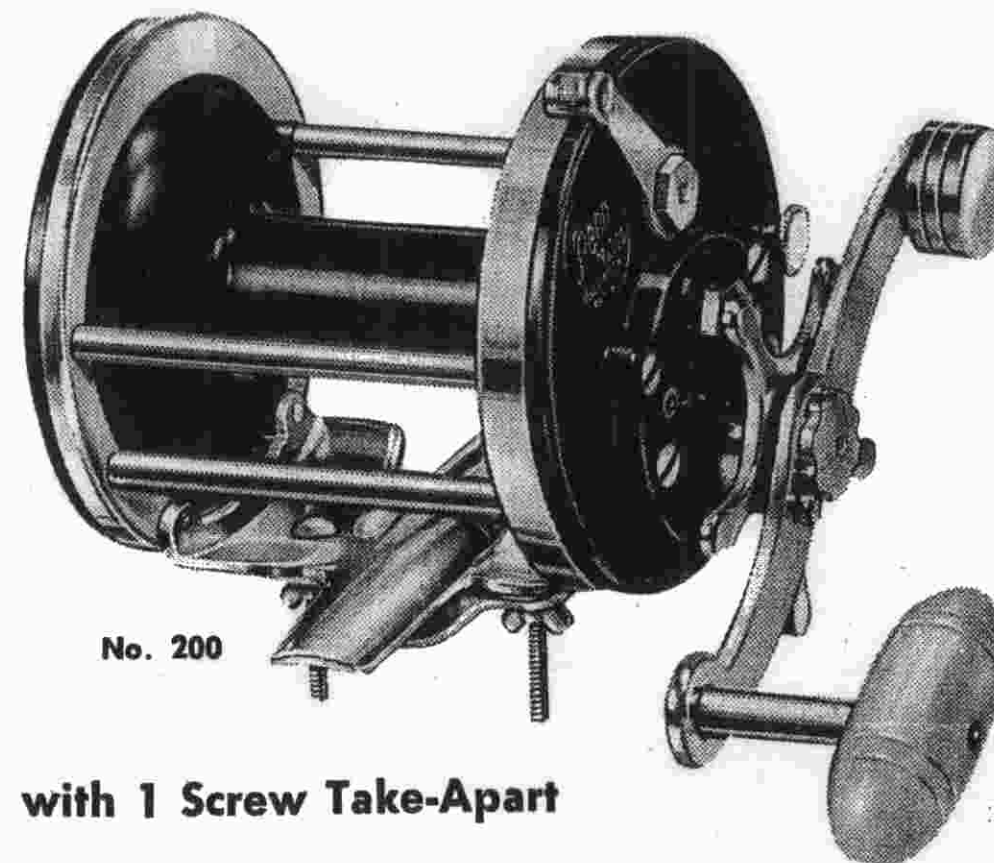

No. 200

with 1 Screw Take-Apart

REINFORCED PLASTIC SPOOL MODELS (Each supplied with 2 Spools)


Model	Approx. Capacity in 36 lb. Dacron	Wt. of Reel	Plate Diam.	Spool Width	List Price
No. 100	100 yd.	16 oz.	2¾"	1⅝"	\$13.00
No. 150	150 yd.	17½ oz.	2¾"	2⅛"	14.00
No. 200	200 yd.	18 oz.	2¾"	2-7/16"	15.00
No. 250	250 yd.	20 oz.	3-1/16"	2-7/16"	16.00
Left hand models extra					\$ 1.50

METAL SPOOL MODELS (Each supplied with 1 Spool)

Model	Capacity	Wt. of Reel	Plate Diam.	Spool Width	List Price
No. 100M	150 yd.	17 oz.	2¾"	1⅝"	\$12.75
No. 150M	200 yd.	18 oz.	2¾"	2⅛"	13.75
No. 200M	250 yd.	19½ oz.	2¾"	2-7/16"	15.00
No. 250M	300 yd.	22½ oz.	3-1/16"	2-7/16"	16.00
Left hand models extra					\$ 1.50

PENN BEACHMASTER

Light Weight — Triple Multiplying

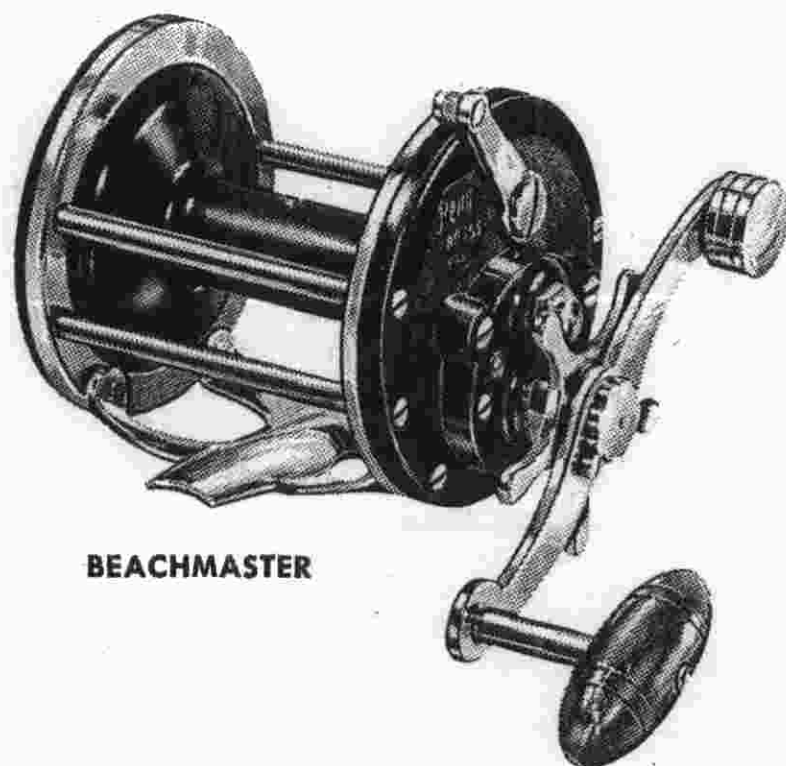

BEACHMASTER

The Penn Beachmaster is small, light in weight and extremely popular for surf, top and bay fishing. Streamlined end plates are metal bound and beautifully engraved. Plate diameter 2¾". Spool width 2-7/16". Gear ratio 2.8 to 1.

REINFORCED PLASTIC SPOOL MODELS

Approx. Capacities based on 36 lb. Dacron


	List Price
No. 155 Star Drag, Lightweight Spool, 200 yd. Wt. 14 oz.	\$10.50
No. 160 Star Drag, Lightweight Spool, 150 yd. Wt. 13 oz.	9.50
No. 165 Free Spool, Lightweight Spool, 150 yd. Wt. 12½ oz.	7.50
Left hand models extra	\$ 1.50

METAL SPOOL MODELS

Approx. Capacities based on 36 lb. Dacron

No. 155M Star Drag, Metal Spool, 250 yd. Wt. 16 oz.	\$11.50
No. 160M Star Drag, Metal Spool, 200 yd. Wt. 14½ oz.	10.50
No. 165M Free Spool, Metal Spool, 200 yd. Wt. 14 oz.	8.50
Left hand models extra	\$ 1.50

PENN BAYMASTER

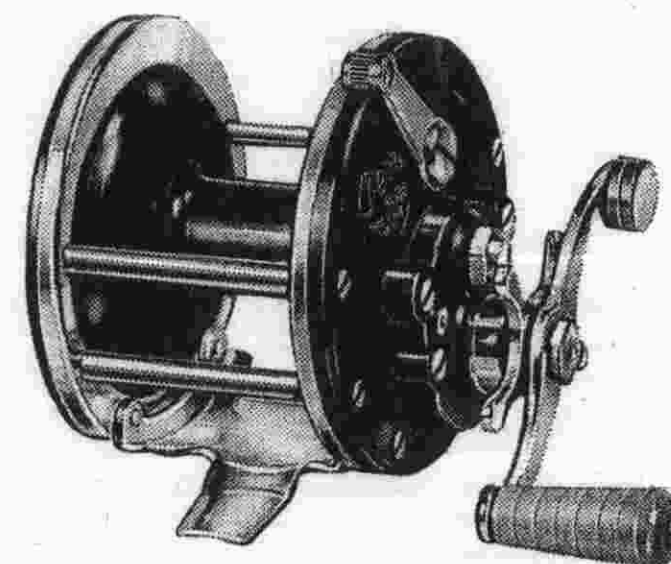

BAYMASTER

These lightweight reels are ideally suited for light tackle fishing. All reels in this series are equipped with free spool action, sliding click and one-shot lubrication system. Metal bound and handsomely engraved end plates. All models have 2¾" plate diameter and spools 15/8" in width.

PLASTIC SPOOL MODELS

Approx. Capacity: 150 yd., 25 lb. Nylon

	List Price
No. 180F Star Drag, 2¾" Reel Stand, Wt. 12 oz.	\$ 7.95
No. 180S Star Drag, 2-11/16" Reel Stand, Wt. 12 oz.	7.95
No. 185F Free Spool Action, 2¾" Reel Stand, Wt. 11½ oz.	6.50
No. 185S Free Spool Action, 2-11/16" Reel Stand, Wt. 11½ oz.	6.50


METAL SPOOL MODELS

Approx. Capacity: 180 yd., 25 lb. Nylon

No. 180MF Metal Spool, Star Drag, 2¾" Reel Stand, Wt. 12½ oz.	\$ 8.95
No. 180MS Metal Spool, Star Drag, 2-11/16" Reel Stand, Wt. 12½ oz.	8.95
No. 185MF Metal Spool, Free Spool, 2¾" Reel Stand, Wt. 12 oz.	7.50
No. 185MS Metal Spool, Free Spool, 2-11/16" Reel Stand, Wt. 12 oz.	7.50
Left hand models extra	\$ 1.00

Monofil[®] LEVEL-WIND REELS

All three models are available with either lightweight plastic spools or metal spools of chromed brass. All spools are precision-fitted for trouble-free use with monofilament line, as well as all other types of lines.

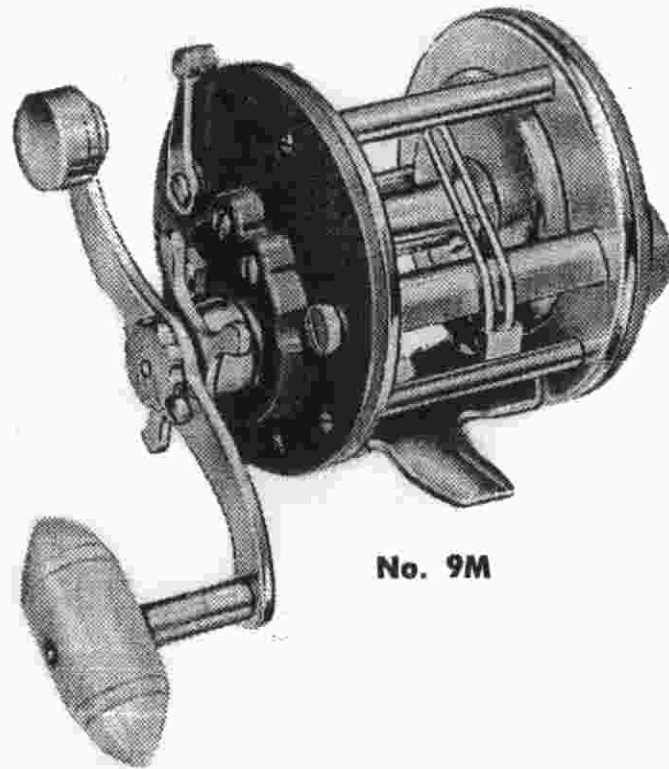


No. 9M

PEERLESS MONOFIL Level-Wind Reels

Gear Ratio 3 to 1, Star Drag, Free Spool Action, Spare Pawl, Precision-Fitted Spools, Positive Level-wind Mechanism.

No. 9F 2 $\frac{3}{8}$ " Reel Stand, Plastic Spool, 150 yd. cap. Wt. 11 oz.	\$13.50
No. 9S As above, with 2-11/16" Reel Stand for Saltwater Rods	13.50
No. 9MF 2 $\frac{3}{8}$ " Reel Stand, Metal Spool, 200 yd. cap. Wt. 12 oz.	14.50
No. 9MS As above, with 2-11/16" Reel Stand for Saltwater Rods	14.50
Left hand models extra	\$ 4.00

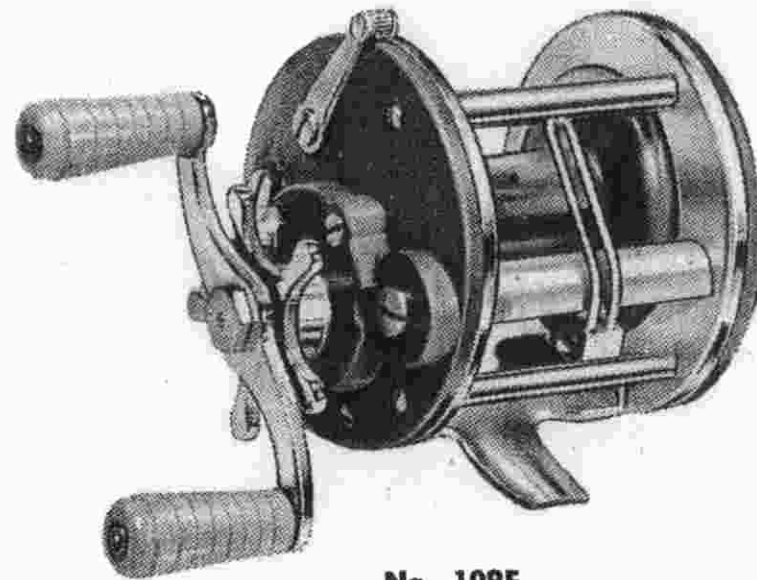


No. 109F

PEER MONOFIL Level-Wind Reels

Gear Ratio 3 $\frac{3}{4}$ to 1, Star Drag, Spare Pawl, Precision-Fitted Spools, Positive Level-wind Mechanism.

No. 109F 2 $\frac{3}{8}$ " Reel Stand, Plastic Spool, 150 yd. cap. Wt. 11 oz.	List Price \$12.00
No. 109S As above with 2-11/16" Reel Stand for Saltwater Rods	12.00
No. 109MF 2 $\frac{3}{8}$ " Reel Stand, Metal Spool, 200 yd. cap. Wt. 12 oz.	12.95
No. 109MS As above, with 2-11/16" Reel Stand for Saltwater Rods	12.95
Left hand models extra	\$ 4.00

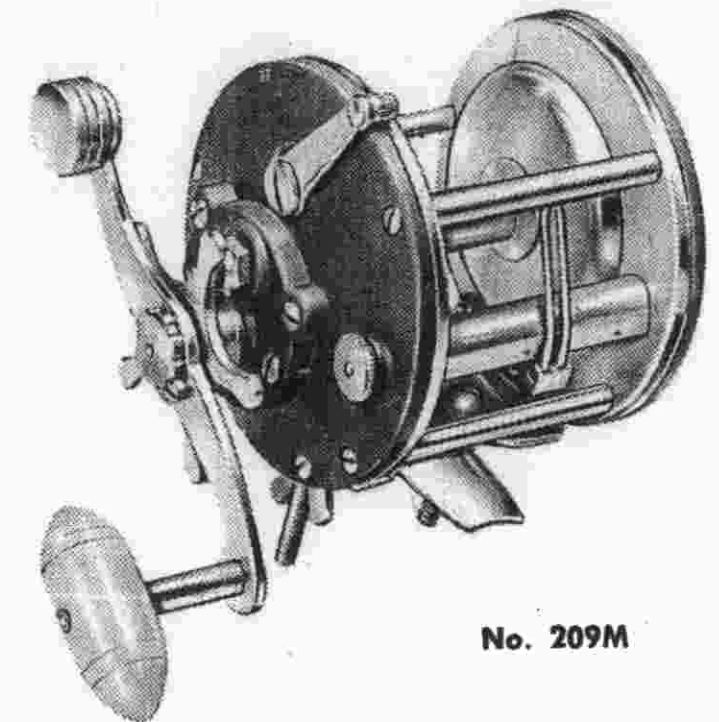

No. 209M

PEER MONOFIL SR. Level-Wind Reels

Gear Ratio 3 to 1, Star Drag, Free Spool Action, Spare Pawl, Precision-Fitted Spool, Positive Level-wind Mechanism.


No. 209 Plastic Spool, 500 yd. cap., Wt. 18 $\frac{1}{2}$ oz.	List Price \$14.95
No. 209M Metal Spool, 600 yd. cap., Wt. 19 $\frac{1}{2}$ oz.	15.95
Left hand models extra	\$ 4.00

®The name "Monofil" is registered in U. S. Patent Office.

ALL CAPACITIES SHOWN ARE APPROXIMATE AND BASED ON 15 LB. MONOFILAMENT

Monofil[®] CONVENTIONAL REELS

Penn Monofil Reels provide the advantages and thrills of fishing with light lines, lures and tackle—plus the LANDING POWER of conventional star drag reels, to bring in fighting fish.

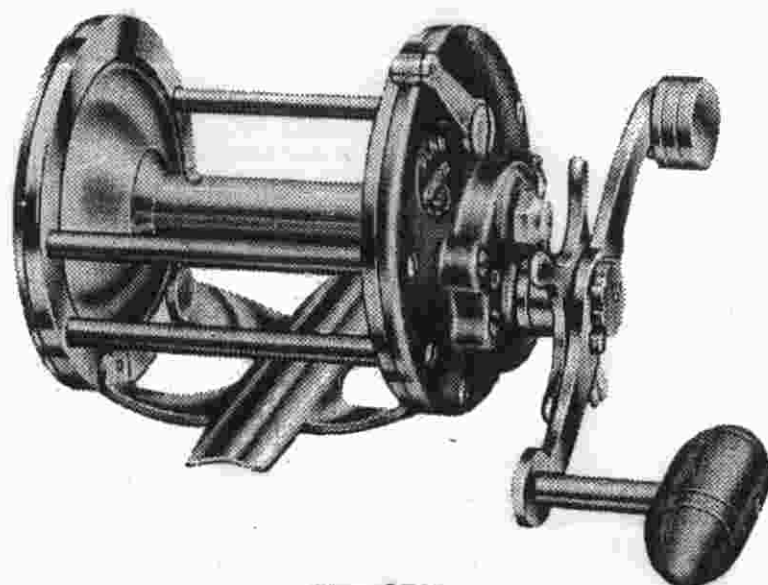


No. 25M

MONOFIL MODEL No. 25

Gear Ratio 3 to 1, Star Drag, Free Spool Action, Chrome Plated, Precision-Fitted Spool.

	List Price
No. 25 Plastic Spool, 400 yd. cap., Wt. 15 oz.	\$11.50
No. 25M Metal Spool, 450 yd. cap., Wt. 16 oz.	12.50
Left hand models extra	\$ 1.50

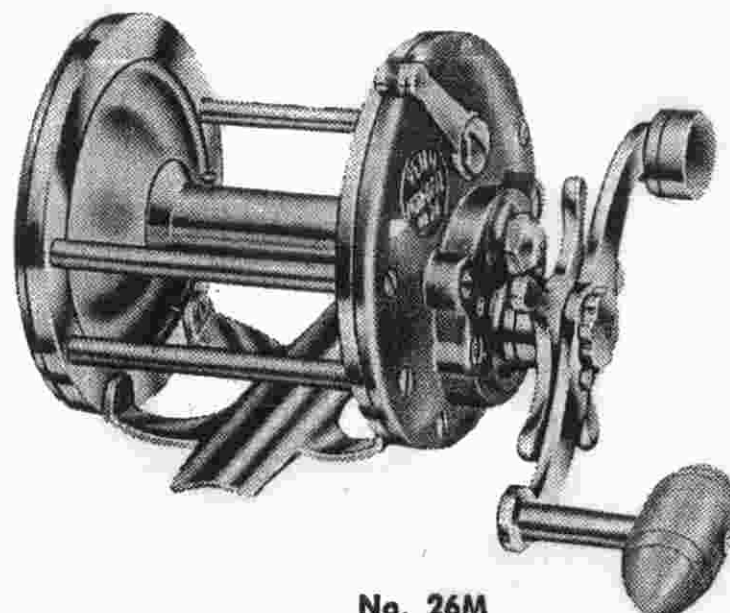


No. 26M

MONOFIL MODEL No. 26

Gear Ratio 3 to 1, Star Drag, Free Spool Action, Chrome Plated, Precision-Fitted Spool.

	List Price
No. 26 Plastic Spool, 300 yd. cap., Wt. 13½ oz.	\$10.50
No. 26M Metal Spool, 350 yd. cap., Wt. 15 oz.	11.50
Left hand models extra	\$ 1.50

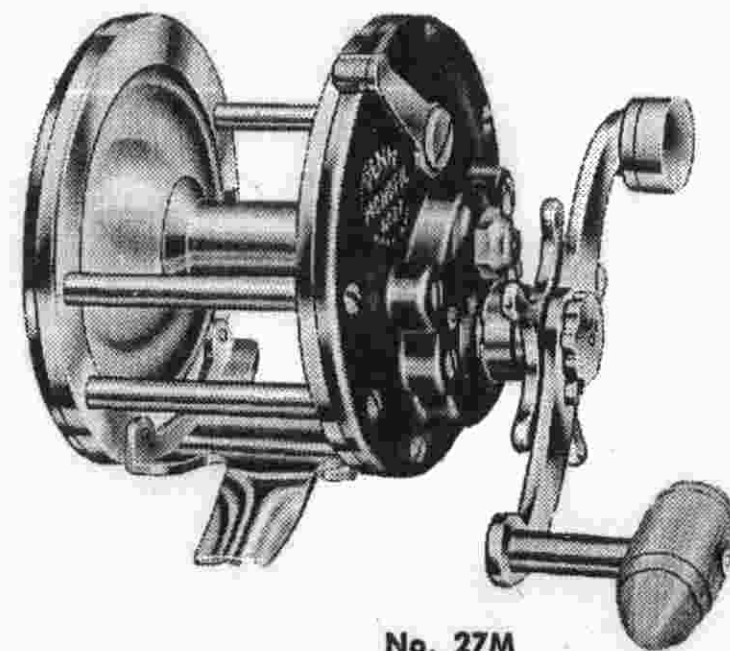

No. 27M

MONOFIL MODEL No. 27

Gear Ratio 3 to 1, Star Drag, Free Spool Action, Chrome Plated, Precision-Fitted Spool.

	List Price
No. 27F 2⅜" Reel Stand, Plastic Spool, 250 yd. cap. Wt. 12½ oz.	\$ 9.50
No. 27S As above, with 2-11/16" Reel Stand for Saltwater Rods	9.50
No. 27MF 2⅜" Reel Stand, Metal Spool, 275 yd. cap. Wt. 13½ oz.	10.50
No. 27MS As above, with 2-11/16" Reel Stand for Saltwater Rods	10.50
Left hand models extra	\$ 1.50


We recommend using No. 9 linen line as backing on these reels, to help cushion the pressure developed by monofilament line retrieved under tension.

ALL CAPACITIES SHOWN ARE APPROXIMATE AND BASED ON 15 LB. MONOFILAMENT

FOR GENERAL ALL-AROUND FISHING

Penn universal reels provide desirable features at moderate prices. All are suitable for light trolling, pier, surf, bottom, bay, and fresh water trolling. Strong gears, smooth free-spool action. Penn one-shot lubrication system. All models have star drag, except Nos. 78, 79, and 77.

PENN SEA-MATE, SEA-SCAMP

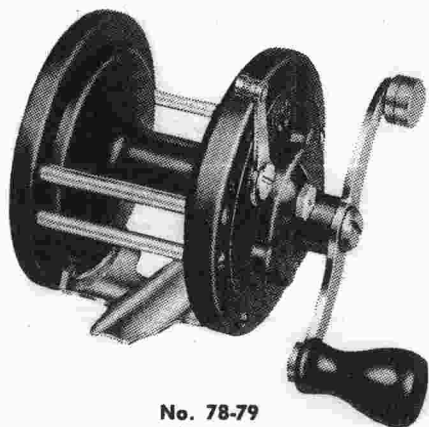


No. 78-79

	List Price
No. 78 Sea-Scamp , 150 yd., Free Spool Action Weight 10 oz.	\$4.00
No. 79 Sea-Mate , 200 yd., Free Spool Action Weight 11 oz.	4.50
No. 77 Sea-Hawk . Economy priced. For bay and fresh water fishing. Double handle. Click. Plastic spool. Wt. 6½ oz.	3.00

PENN DELMAR 200 and 250 yards Universal Star Drag Reel Ideal for fresh-water trolling and stillfishing.

Plate Diameter 3¼"
Spool Width 1-13/16" • Gear Ratio 2.3 to 1

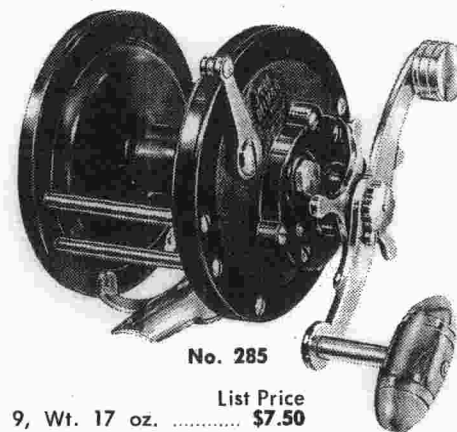

No. 285


	List Price
No. 285 Approx. 200 yd. No. 9, Wt. 17 oz.	\$7.50
No. 285M Metal Spool—250 yd. No. 9, Wt. 18 oz.	8.50
Metal parts are chrome plated and hand polished.	
Left hand models extra	\$1.00

PENN SEA-BOY

200 yards
Popular Star Drag Reel
Ideal for fresh-water trolling and
stillfishing.

Plate Diameter 3¼"
Spool Width 1-13/16"
Gear Ratio 2.3 to 1

	List Price
No. 85 200 yd. No. 9, free spool action	\$5.95
No. 85M Metal Spool — 190 yds. No. 12	6.95
Left hand models extra	\$1.00

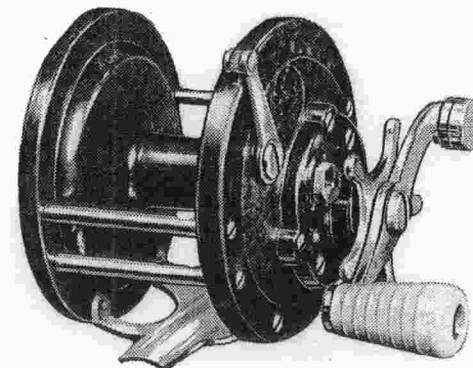

No. 85

PENN ACCESSORIES



PENN REEL LUBE

These handy tubes contain a lubricant which is equally effective for gears, shafts, and ball bearings. Penn Reels are equipped with self-sealing lubricating nipples, to insure thorough lubrication.


No. 24 Standard SizePrice .19c each

No. 224 Large SizePrice .35c each

NEW! — PENN TROPICAL LUBE

Particularly well suited for hot weather. Will not run or leak. Adheres to gears.

No. 223 Large SizePrice .35c each

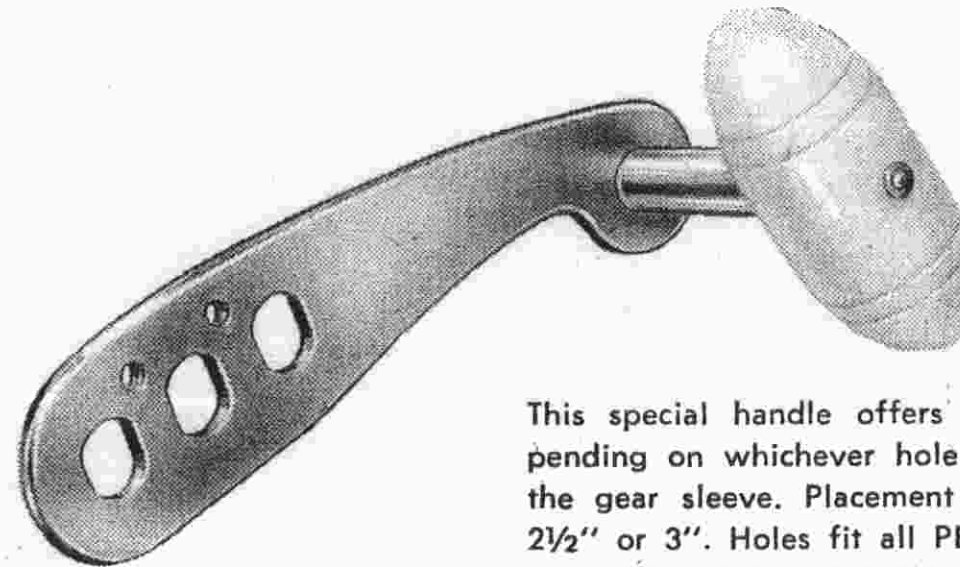

PENN CONVERTIBLE 3-IN-1 HANDLE

This special handle offers a fisherman a choice of leverage, depending on whichever hole of the handle is used and placed over the gear sleeve. Placement of holes allows for a leverage of 2", 2½" or 3". Holes fit all PENN reels up to the 4/0 Senator, except the models 349 and 349H.

On reels suitable for 1⅞" torpedo knob use Handle 24-55Price each \$2.00

On reels suitable for "big-fisted" 2½" torpedo knob use Handle 24-56Price each \$2.25

Overall dimensions of both handles are identical. The size of knobs, only, is different.

No. 24-57 2 hole handle for Nos. 114 and 115Price each \$3.00

PENN REEL PARTS KITS

Ideal for dealers and reel repairmen.

PARTS KIT NO. 6 Compartmented plastic box contains an assortment of small parts for all Penn Reels, except Senator reels sizes 6/0 to 16/0Each \$20.00

PARTS KIT NO. 4 For Penn Level-Wind models. Compartmented plastic box contains a special assortment of parts for Penn models No. 9, 109 & 209 reelsEach \$20.00


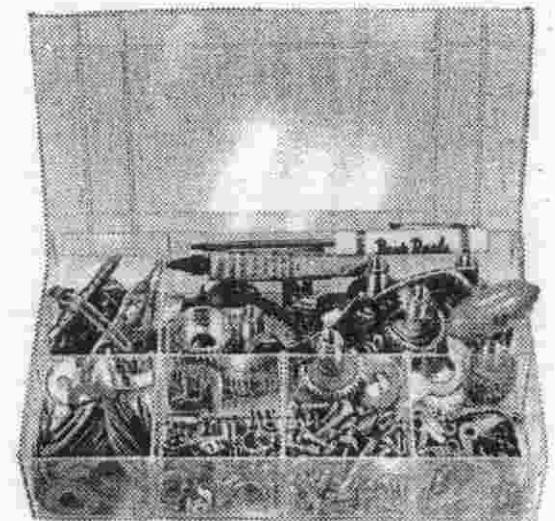


ILLUSTRATION OF PARTS FOR PENN REELS

COMPLETE LIST ON PAGES 19 TO 27. SEE INSTRUCTIONS "HOW TO ORDER PARTS" ON PAGE 28

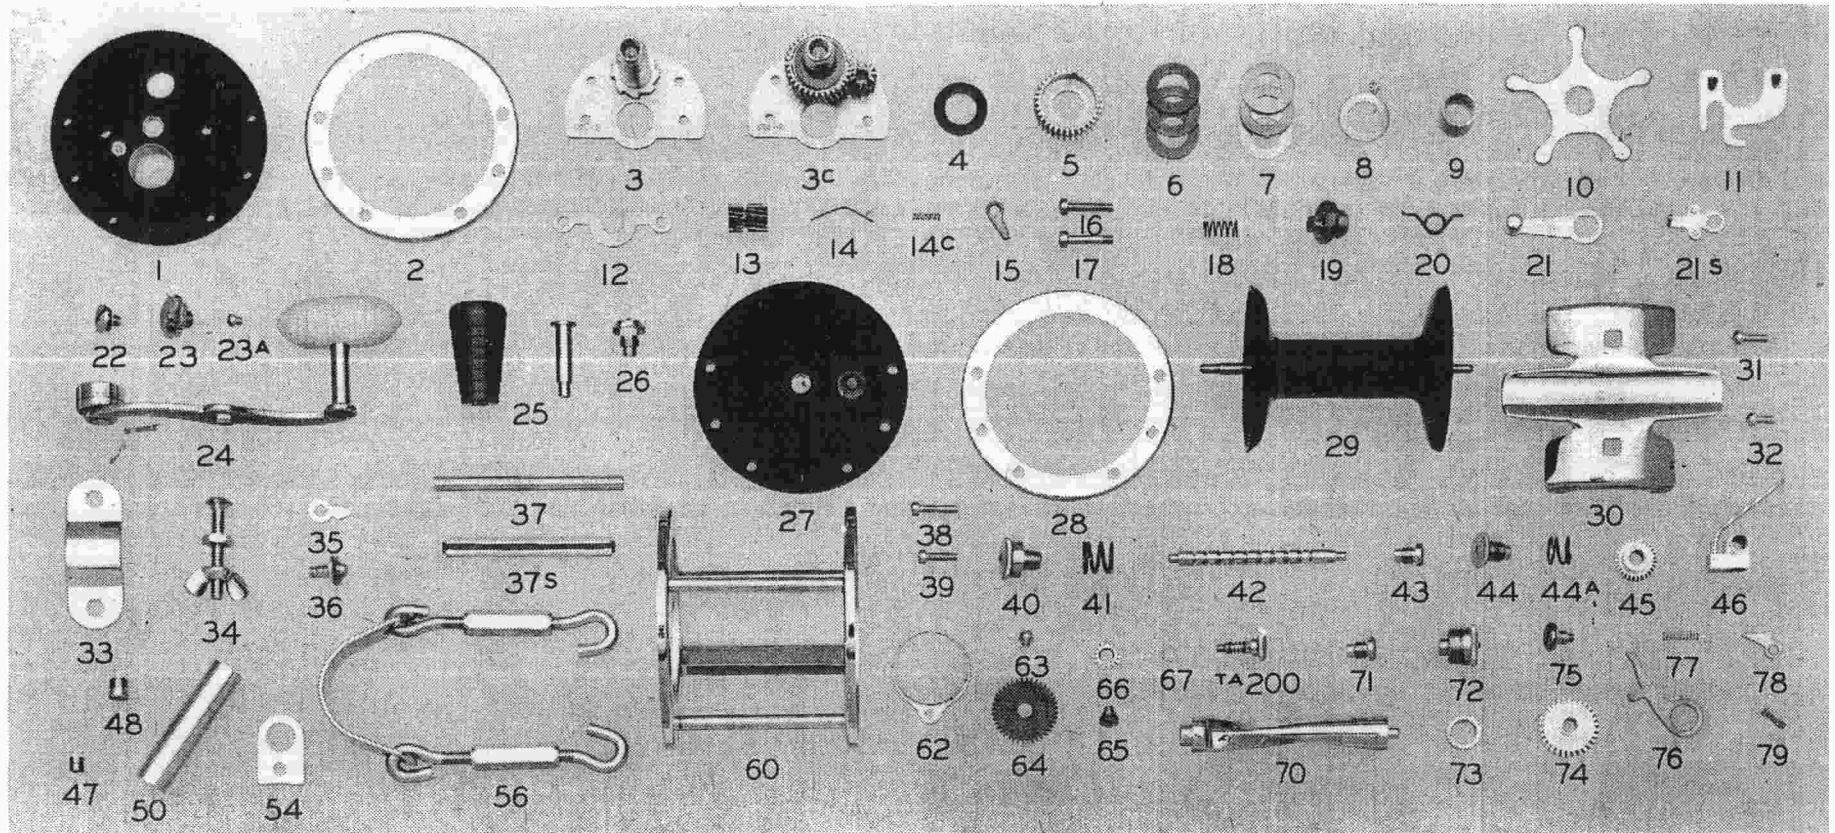

PENN REEL PARTS No. 1 TO No. 4

SEE FOOTNOTES ON PAGE 28

Reel No.	No. 1 Right Side Plate		No. 2 Right Side Ring		No. 3 Gear Bridge with Sleeve		No. 3C Bridge Comp. with Pinion		No. 4 Red Fibre Washer	
	Part No.	Price Each	Part No.	Price Each	Part No.	Price Each	Part No.	Price Each	Part No.	Price Each
9	•1-9	.90	2-109	.50	3-9	1.00	3C-9	2.40	4-155	.03
25	•1-25	1.00	2-155	.50	3-155	1.00	3C-155	2.40	4-155	.03
26	•1-26	1.00	2-155	.50	3-155	1.00	3C-155	2.40	4-155	.03
27	•1-27	1.00	2-155	.50	3-155	1.00	3C-155	2.40	4-155	.03
49	1-49	1.25	2-49★	1.00	3-49	1.25	3C-49	3.55	4-60	.03
60	1-60	.75	2-60	.60	3-60	1.00	3C-60	2.50	4-60	.03
65	1-65	.75	2-60	.60	3-60	1.00	3C-60	2.50	4-60	.03
66	1-66	1.00	2-66	.75	3-66	1.25	3C-66	3.15	4-60	.03
67	1-67	1.00	2-66	.75	3-66	1.25	3C-66	3.15	4-60	.03
68	1-68	1.00	2-66	.75	3-66	1.25	3C-66	3.15	4-60	.03
77	1-77	.50		..		...		...		..
78	1-78	.75		..	3-78	.30		...		..
79	1-79	.75		..	3-78	.30		...		..
85	1-85	.75		..	3-85	1.00	3C-85	2.50	4-155	.03
99	1-99	1.50	2-99	1.25	3-99	1.25	3C-99	3.00	4-60	.03
100	1-100	1.50	2-200	1.25	3-200	1.25	3C-200	3.00	4-155	.03
109	•1-109	.90	2-109	.50	3-109	.80	3C-109	2.20	4-155	.03
110	1-110	.75	2-110★	.60	3-99	1.25	3C-99	3.00	4-60	.03
111	1-111	.75	2-111★	.60	3-66	1.25	3C-66	3.15	4-60	.03
112	1-112	1.00	2-111★	.60	3-66	1.25	3C-66	3.15	4-60	.03
113	1-113	1.25	2-113★	1.00	3-113	1.50	3C-113	3.83	4-60	.03
114	1-114	1.50	2-114★	1.25	3-114	2.25	3C-114	5.42	4-114	.10
115	1-115	2.50	2-115★	1.50	3-115	2.50	3C-115	6.06	4-115	.10
116A	1-116A	3.50	2-116★	2.00	3-116	3.00	3C-116	8.76	4-116	.10
116	1-116	3.50	2-116★	2.00	3-116	3.00	3C-116	8.76	4-116	.10
117	1-117	5.00	2-117★	2.40	3-117	5.00	3C-117	11.71	4-117	.10
118	1-118	5.00	2-117★	2.40	3-117	5.00	3C-117	11.71	4-117	.10
130	1-130	1.25	2-130	1.00	3-130	1.25	3C-130	3.62	4-130	.05
140	•1-140	1.50	2-200	1.25	3-200	1.25	3C-140	3.00	4-155	.03
145	1-145	1.50	2-200	1.25	3-200	1.25	3C-140	3.00	4-155	.03
149	1-149	1.25	2-49	1.00	3-149	1.25	3C-149	2.90	4-60	.03
150	1-150	1.50	2-200	1.25	3-200	1.25	3C-200	3.00	4-155	.03
155	1-155	.75	2-155	.50	3-155	1.00	3C-155	2.40	4-155	.03
160	1-160	.75	2-155	.50	3-155	1.00	3C-155	2.40	4-155	.03
165	1-165	.75	2-155	.50	3-165	.50	3C-165	1.30		..
180	1-180	.75	2-155	.50	3-155	1.00	3C-155	2.40	4-155	.03
185	1-185	.75	2-155	.50	3-165	.50	3C-165	1.30		..
200	1-200	1.50	2-200	1.25	3-200	1.25	3C-200	3.00	4-155	.03
209	•1-209	1.00	2-209	.60	3-155	1.00	3C-155	2.40	4-155	.03
250	1-250	1.50	2-250	1.25	3-99	1.25	3C-99	3.00	4-60	.03
259	1-259	.75	2-110★	.60	3-99	1.25	3C-99	3.00	4-60	.03
285	1-285	.75		..	3-60	1.00	3C-60	2.50	4-60	.03
350	1-350	1.25	2-350	.75	3-155	1.00	3C-155	2.40	4-155	.03
349	1-349#	1.50	2-349★	1.00	3-349	2.25	3C-349	5.41	4-349	.03
349H	1-349H#1.50		2-349★	1.00	3-349	2.25	3C-349H	5.66	4-349	.03
500	1-500	1.50	2-250	1.25	3-500	1.75	3C-500	3.50	4-60	.03

• STATE COLOR REQUIRED

PENN REEL PARTS No. 5 TO No. 10

SEE FOOTNOTES ON PAGE 28

Reel No.	No. 5 Main Gear		No. 6 Drag Washer		No. 7 Metal Disk Set		No. 8 Tension Spring		No. 9 Spacing Sleeve		No. 10 Drag Star	
	Part No.	Price Each	Part No.	Price Each	Part No.	Price Per Set	Part No.	Price Each	Part No.	Price Each	Part No.	Price Each
9	5-109	.50	6-155	.03	7-155	.18	8-60	.10	9-60	.15	10-180	.50
25	5-155	.50	6-155	.03	7-155	.18	8-60	.10	9-60	.15	10-60	.50
26	5-155	.50	6-155	.03	7-155	.18	8-60	.10	9-60	.15	10-60	.50
27	5-155	.50	6-155	.03	7-155	.18	8-60	.10	9-60	.15	10-60	.50
49	5-49	1.00	6-49	.04	7-49	.30	8-60	.10	9-60	.15	10-49	.75
60	5-60	.60	6-60	.03	7-60	.18	8-60	.10	9-60	.15	10-60	.50
65	5-60	.60	6-60	.03	7-60	.18	8-60	.10	9-60	.15	10-60	.50
66	5-66	.75	6-60	.03	7-66	.30	8-60	.10	9-66	.20	10-66	.75
67	5-66	.75	6-60	.03	7-66	.30	8-60	.10	9-66	.20	10-66	.75
68	5-66	.75	6-60	.03	7-66	.30	8-60	.10	9-66	.20	10-66	.75
77	5-77	.50		..		..		..		..		..
78	5-78	.50		..		..		..		..		..
79	5-78	.50		..		..		..		..		..
85	5-60	.60	6-60	.03	7-60	.18	8-60	.10	9-60	.15	10-60	.50
99	5-60	.60	6-60	.03	7-60	.18	8-60	.10	9-60	.15	10-60	.50
100	5-60	.60	6-60	.03	7-60	.18	8-60	.10	9-60	.15	10-60	.50
109	5-109	.50	6-155	.03	7-155	.18	8-60	.10	9-60	.15	10-180	.50
110	5-60	.60	6-60	.03	7-60	.18	8-60	.10	9-60	.15	10-60	.50
111	5-66	.75	6-60	.03	7-66	.30	8-60	.10	9-66	.20	10-60	.50
112	5-66	.75	6-60	.03	7-66	.30	8-60	.10	9-66	.20	10-60	.50
113	5-113	.90	6-113	.12	7-60	.18	8-60	.10	9-66	.20	10-66	.75
114	5-114	1.50	6-114	.14	7-114	.30	8-114	.20	9-114	.40	10-114	1.00
115	5-115	1.75	6-115	.16	7-115	.40	8-114	.20	9-115	.40	10-114	1.00
116A	5-116	2.50	6-116	.18	7-116	.60	8-116	.20		..	10-116	1.50
116	5-116	2.50	6-116	.18	7-116	.60	8-116	.20		..	10-116	1.50
117	5-117	3.00	6-117	.20	7-117	.90	8-117	.25	9-117	.60	10-117	1.50
118	5-117	3.00	6-117	.20	7-117	.90	8-117	.25	9-117	.60	10-117	1.50
130	5-130	1.00	6-130	.04	7-130	.30	8-130	.10	9-130	.25	10-130	.75
140	5-60	.60	6-60	.03	7-60	.18	8-60	.10	9-60	.15	10-140	.50
145	5-60	.60	6-60	.03	7-60	.18	8-60	.10	9-60	.15	10-140	.50
149	5-149	.75	6-60	.03	7-60	.18	8-60	.10	9-60	.15	10-49	.75
150	5-60	.60	6-60	.03	7-60	.18	8-60	.10	9-60	.15	10-60	.50
155	5-155	.50	6-155	.03	7-155	.18	8-60	.10	9-60	.15	10-60	.50
160	5-155	.50	6-155	.03	7-155	.18	8-60	.10	9-60	.15	10-60	.50
165	5-165	.80		..		..		..		..		..
180	5-155	.50	6-155	.03	7-155	.18	8-60	.10	9-60	.15	10-180	.50
185	5-165	.80		..		..		..		..		..
200	5-60	.60	6-60	.03	7-60	.18	8-60	.10	9-60	.15	10-60	.50
209	5-155	.50	6-155	.03	7-155	.18	8-60	.10	9-60	.15	10-60	.50
250	5-60	.50	6-60	.03	7-60	.18	8-60	.10	9-60	.15	10-60	.50
259	5-60	.60	6-60	.03	7-60	.18	8-60	.10	9-60	.15	10-60	.50
285	5-60	.60	6-60	.03	7-60	.18	8-60	.10	9-60	.15	10-60	.50
350	5-350	.60	6-155	.03	7-155	.18	8-60	.10	9-60	.15	10-60	.50
349	5-349	1.25	6-349	.15	7-349	.50	8-349	.15	9-349	.50	10-349	1.00
349H	5-349H	1.50	6-349H	.15	7-349H	.50	8-349	.15	9-349	.50	10-349	1.00
500	5-500	.90	6-500	.03	7-500	.18	8-60	.10	9-60	.15	10-60	.50

PENN REEL PARTS No. 11 TO No. 15

SEE FOOTNOTES ON PAGE 28

Reel No.	No. 11 Eccentric Jack			No. 12 Pinion Yoke			No. 13 Pinion Gear			No. 14 Dog Spring			No. 15 Dog		
	Part No.	Price Each		Part No.	Price Each		Part No.	Price Each		Part No.	Price Each		Part No.	Price Each	
9	11-9	.20		12-9	.16		13-9	.50		14-9	.03		15-9	.15	
25	11-155	.20		12-155	.16		13-155	.50		14-155	.03		15-155	.15	
26	11-155	.20		12-155	.16		13-155	.50		14-155	.03		15-155	.15	
27	11-155	.20		12-155	.16		13-155	.50		14-155	.03		15-155	.15	
49	11-49	.20		12-60	.16		13-49	.75		14-60	.03		15-49	.20	
60	11-60	.20		12-60	.16		13-60	.50		14-99	.03		15-99	.15	
65	11-60	.20		12-60	.16		13-60	.50		14-99	.03		15-99	.15	
66	11-66	.20		12-60	.16		13-49	.75		14-99	.03		15-99	.15	
67	11-66	.20		12-60	.16		13-49	.75		14-99	.03		15-99	.15	
68	11-66	.20		12-60	.16		13-49	.75		14-99	.03		15-99	.15	
77		..			..		13-77	.30			..			..	
78	11-78	.20		12-60	.16		13-60	.50			..			..	
79	11-60	.20		12-60	.16		13-60	.50			..			..	
85	11-60	.20		12-60	.16		13-60	.50		14-99	.03		15C-85	.15	
99	11-99	.20		12-99	.16		13-99	.75		14-99	.03		15-99	.15	
100	11-200	.20		12-155	.16		13-200	.75		14-155	.03		15-200	.15	
109		..			..		13-109	.50		14-109	.03		15-109	.15	
110	11-110	.20		12-110	.16		13-99	.75		14-60	.03		15-60	.15	
111	11-60	.20		12-60	.16		13-49	.75		14-99	.03		15-99	.15	
112	11-60	.20		12-60	.16		13-49	.75		14-99	.03		15-99	.15	
113	11-130	.20		12-113	.20		13-113	.75		14-99	.03		15-99	.15	
114	11-114	.60		12-114	.30		13-114	.90		14-114	.04		15-114	.20	
115	11-115	.60		12-114	.30		13-114	.90		14-116	.04		15-115	.25	
116A	11-116	.80		12-116	.50		13-116	1.50		14-116	.04		15-116	.30	
116	11-116	.80		12-116	.50		13-116	1.50		14-116	.04		15-116	.30	
117	11-116	.80		12-116	.50		13-117	1.50		14-117	.05		15-117	.35	
118	11-116	.80		12-116	.50		13-117	1.50		14-117	.05		15-117	.35	
130	11-130	.20		12-60	.16		13-130	.75		14-130	.03		15-130	.15	
140	11-200	.20		12-155	.16		13-140	.75		14-140	.03		15-140	.20	
145	11-200	.20		12-155	.16		13-140	.75		14-140	.03		15-140	.20	
149	11-49	.20		12-113	.16		13-113	.75		14-60	.03		15-149	.15	
150	11-200	.20		12-155	.16		13-200	.75		14-155	.03		15-200	.15	
155	11-155	.20		12-155	.16		13-155	.50		14-155	.03		15-155	.15	
160	11-155	.20		12-155	.16		13-155	.50		14-155	.03		15-155	.15	
165	11-155	.20		12-155	.16		13-155	.50			..			..	
180	11-155	.20		12-155	.16		13-155	.50		14-155	.03		15-155	.15	
185	11-155	.20		12-155	.16		13-155	.50			..			..	
200	11-200	.20		12-155	.16		13-200	.75		14-155	.03		15-200	.15	
209	11-155	.20		12-155	.16		13-155	.50		14-99	.03		15-209	.15	
250	11-99	.20		12-99	.16		13-99	.75		14-60	.03		15-60	.15	
259	11-110	.20		12-110	.16		13-99	.75		14-60	.03		15-60	.15	
285	11-60	.20		12-60	.16		13-60	.50		14-99	.03		15-99	.15	
350	11-155	.20		12-155	.16		13-200	.75		14-99	.03		15-209	.15	
349	11-349	.25		12-349	.25		13-349	.90		14-349	.15		15-349	.35	
349H	11-349	.25		12-349H	.25		13-349H	.90		14-349	.15		15-349	.35	
500	11-99	.20		12-99	.16		13-500	.75		14-130	.03		15-500	.15	

PENN REEL PARTS No. 16 TO No. 21

SEE FOOTNOTES ON PAGE 28

Reel No.	No. 16 Bridge Screw Lower			No. 17 Bridge Screw Upper			No. 18 Clutch Spring			No. 19 Eccentric			No. 20 Eccentric Spring			No. 21 Eccentric Lever		
	Part No.	Price Each		Part No.	Price Each		Part No.	Price Each		Part No.	Price Each		Part No.	Price Each		Part No.	Price Each	
9	16-9	.04		17-9	.04		18-9	.03		19-9	.30		20-109	.03		21-109	.20	
25	16-60	.04		17-60	.04		18-60	.03		19-155	.25		20-155	.03		21-155	.20	
26	16-60	.04		17-60	.04		18-60	.03		19-155	.25		20-155	.03		21-155	.20	
27	16-60	.04		17-60	.04		18-60	.03		19-155	.25		20-155	.03		21-155	.20	
49	16-60	.04		17-60	.04		18-60	.03		19-60*	.30		20-60‡	.03		21-49	.30	
60	16-60	.04		17-60	.04		18-60	.03		19-60	.30		20-60	.03		21-285	.20	
65	16-60	.04		17-60	.04		18-60	.03		19-60	.30		20-60	.03		21-285	.20	
66	16-60	.04		17-60	.04		18-60	.03		19-60	.30		20-60	.03		21-66	.20	
67	16-60	.04		17-60	.04		18-60	.03		19-60	.30		20-60	.03		21-66	.20	
68	16-60	.04		17-60	.04		18-60	.03		19-60	.30		20-60	.03		21-66	.20	
77		..			..			..			..			..			..	
78	16-78	.04			..		18-60	.03		19-60	.30		20-60	.03		21-66	.20	
79	16-78	.04			..		18-60	.03		19-60	.30		20-60	.03		21-285	.20	
85	16-60	.04		17-60	.04		18-60	.03		19-60	.30		20-60	.03		21-285	.20	
99	16-60	.04		17-60	.04		18-60	.03		19-99	.30		20-60	.03		21-66	.20	
100	16-60	.04		17-60	.04		18-60	.03		19-200	.30		20-155	.03		21-200	.20	
109	16-60	.04			..			..		19-109	.20		20-109	.03		21-109	.20	
110	16-60	.04		17-60	.04		18-60	.03		19-110	.30		20-60	.03		21-66	.20	
111	16-60	.04		17-60	.04		18-60	.03		19-110	.30		20-60	.03		21-66	.20	
112	16-60	.04		17-60	.04		18-60	.03		19-110	.30		20-60	.03		21-66	.20	
113	16-60	.04		17-60	.04		18-349	.03		19-113	.40		20-155	.03		21-66	.20	
114	16-114	.06		17-114	.06		18-114	.06		19-114	.45		20-114	.15		21-114	.40	
115	16-114	.06		17-114	.06		18-114	.06		19-115	.50		20-114	.15		21-114	.40	
116A	16-114	.06		17-114	.06		18-114	.06		19-115	.50		20-114	.15		21-114	.40	
116	16-114	.06		17-114	.06		18-114	.06		19-115	.50		20-114	.15		21-114	.40	
117	16-114	.06		17-114	.06		18-114	.06		19-115	.50		20-114	.15		21-117	.50	
118	16-114	.06		17-114	.06		18-114	.06		19-115	.50		20-114	.15		21-117	.50	
130	16-60	.04		17-60	.04		18-349	.03		19-130	.30		20-155	.03		21-130	.30	
140	16-60	.04		17-60	.04		18-60	.03		19-200*	.30		20-155	.03		21-200†	.20	
145	16-60	.04		17-60	.04		18-60	.03		19-200*	.30		20-155	.03		21-200†	.20	
149	16-60	.04		17-60	.04		18-60	.03		19-60	.30		20-60	.03		21-49	.30	
150	16-60	.04		17-60	.04		18-60	.03		19-200	.30		20-155	.03		21-200	.20	
155	16-60	.04		17-60	.04		18-60	.03		19-155	.25		20-155	.03		21-155	.20	
160	16-60	.04		17-60	.04		18-60	.03		19-155	.25		20-155	.03		21-155	.20	
165	16-60	.04		17-60	.04		18-60	.03		19-155	.25		20-155	.03		21-155	.20	
180	16-60	.04		17-60	.04		18-60	.03		19-155	.25		20-155	.03		21-155	.20	
185	16-60	.04		17-60	.04		18-60	.03		19-155	.25		20-155	.03		21-155	.20	
200	16-60	.04		17-60	.04		18-60	.03		19-200	.30		20-155	.03		21-200	.20	
209	16-60	.04		17-60	.04		18-60	.03		19-209	.30		20-155	.03		21-209	.20	
250	16-60	.04		17-60	.04		18-60	.03		19-99	.30		20-60	.03		21-66	.20	
259	16-60	.04		17-60	.04		18-60	.03		19-110	.30		20-60	.03		21-66	.20	
285	16-60	.04		17-60	.04		18-60	.03		19-60	.30		20-60	.03		21-285	.20	
350	16-60	.04		17-60	.04		18-60	.03		19-350	.30		20-155	.03		21-285	.20	
349	16-60	.04		17-60	.04		18-349	.03		19-60*	.30		20-60‡	.03		21-49	.30	
349H	16-60	.04		17-60	.04		18-349	.03		19-60*	.30		20-60‡	.03		21-49	.30	
500	16-60	.04		17-60	.04		18-60	.03		19-99	.30		20-60	.03		21-66	.20	

PENN REEL PARTS No. 22 TO No. 25

SEE FOOTNOTES ON PAGE 28

Reel No.	No. 22 Eccentric Screw		No. 23 Handle Screw		No. 23A Handle Lock Screw		No. 24 Handle Complete		No. 25 Knob, Rivet and Oiler	
	Part No.	Price Each	Part No.	Price Each	Part No.	Price Each	Part No.	Price Each	Part No.	Price Per Set
9	22-109	.05	23-60	.25	23A-60	.03	24-160	1.20	25-160	.60
25	22-60	.05	23-60	.25	23A-60	.03	24-155	1.20	25-155	.60
26	22-60	.05	23-60	.25	23A-60	.03	24-160	1.20	25-160	.60
27	22-60	.05	23-60	.25	23A-60	.03	24-160	1.20	25-160	.60
49	22-60	.05	23-60	.25	23A-60	.03	24-49	1.50	25-49	.75
60	22-60	.05	23-60	.25	23A-60	.03	24-66	1.35	25-66	.60
65	22-60	.05	23-60	.25	23A-60	.03	24-66	1.20	25-66	.60
66	22-60	.05	23-60	.25	23A-60	.03	24-66	1.20	25-66	.60
67	22-60	.05	23-60	.25	23A-60	.03	24-66	1.20	25-66	.60
68	22-60	.05	23-60	.25	23A-60	.03	24-66	1.20	25-66	.60
77		..	23-85	.15		..	24-77	.80		..
78	22-60	.05	23-85	.15		..	24-85	.80	25-85	.25
79	22-60	.05	23-85	.15		..	24-85	.80	25-85	.25
85	22-60	.05	23-85	.15		..	24-85	.80	25-85	.25
99	22-99	.20	23-60	.25	23A-60	.03	24-155	1.20	25-155	.60
100	22-99	.20	23-60	.25	23A-60	.03	24-160	1.20	25-160	.60
109	22-109	.05	23-180	.20		..	24-109	1.00	25-109	.25
110	22-99	.20	23-60	.25	23A-60	.03	24-155	1.20	25-155	.60
111	22-99	.20	23-60	.25	23A-60	.03	24-155	1.20	25-155	.60
112	22-99	.20	23-60	.25	23A-60	.03	24-155	1.20	25-155	.60
113	22-99	.20	23-60	.25	23A-60	.03	24-66	1.20	25-66	.60
114	23-60	.25	23-116	.45	23A-60	.03	24-114	2.20	25-114	1.30
115	23-60	.25	23-116	.45	23A-60	.03	24-115	2.75	25-115	1.80
116A	23-60	.25	23-116	.45	23A-60	.03	24-116	3.00	25-116	1.80
116	23-60	.25	23-116	.45	23A-60	.03	24-116	3.00	25-116	1.80
117	23-60	.25	23-116	.45	23A-60	.03	24-117	4.00	25-117	2.50
118	23-60	.25	23-116	.45	23A-60	.03	24-117	4.00	25-117	2.50
130	22-60	.05	23-60	.25	23A-60	.03	24-49	1.50	25-49	.75
140	22-99△	.20	23-60	.25	23A-60	.03	24-155	1.20	25-155	.60
145	22-99△	.20	23-60	.25	23A-60	.03	24-155	1.20	25-155	.60
149	22-60	.05	23-60	.25	23A-60	.03	24-49	1.50	25-49	.75
150	22-99	.20	23-60	.25	23A-60	.03	24-155	1.20	25-155	.60
155	22-60	.05	23-60	.25	23A-60	.03	24-155	1.20	25-155	.60
160	22-60	.05	23-60	.25	23A-60	.03	24-160	1.20	25-160	.60
165	22-60	.05	23-60	.25	23A-60	.03	24-160	1.20	25-160	.60
180	22-60	.05	23-180	.20		..	24-180	1.00	25-180	.25
185	22-60	.05	23-180	.25		..	24-180	1.00	25-180	.25
200	22-99	.20	23-60	.25	23A-60	.03	24-155	1.20	25-155	.60
209	22-60	.05	23-60	.25	23A-60	.03	24-155	1.20	25-155	.60
250	22-99	.20	23-60	.25	23A-60	.03	24-155	1.20	25-155	.60
259	22-99	.20	23-60	.25	23A-60	.03	24-155	1.20	25-155	.60
285	22-60	.05	23-60	.25	23A-60	.03	24-155	1.20	25-155	.60
350	22-99	.20	23-60	.25	23A-60	.03	24-155	1.20	25-155	.60
349	22-60	.05	23-114	.45	23A-60	.03	24-349	2.00	25-49	.75
349H	22-60	.05	23-114	.45	23A-60	.03	24-349H	2.25	25-114	1.30
500	22-99	.20	23-60	.25	23A-60	.03	24-66	1.20	25-66	.60

PENN REEL PARTS No. 26 TO No. 30

SEE FOOTNOTES ON PAGE 28

Reel No.	No. 26 Right Side Bearing		No. 27 Left Side Plate		No. 28 Left Side Ring		No. 29 Plastic Spool		No. 29M Metal Spool		No. 30 Reel Stand	
	Part No.	Price Each	Part No.	Price Each	Part No.	Price Each	Part No.	Price Each	Part No.	Price Each	Part No.	Price Each
9	26-9	.30	• 27-9	1.15	28-109	.50	29-9	1.60	29M-9	2.40	30-109†	1.20
25	26-155	.30	• 27-25	1.00	2-155	.50	29-25	1.50	29M-25	2.25	30-155	1.20
26	26-155	.30	• 27-25	1.00	2-155	.50	29-26	1.50	29M-26	2.20	30-65	1.20
27	26-155	.30	• 27-25	1.00	2-155	.50	29-27	1.50	29M-27	2.20	30-180†	1.20
49	26-60	.30	27-49	1.25	28-49★	1.00	29-49	1.80	29M-49	3.25	30-49	2.20
60	26-60	.30	27-60	.75	28-60	.60		...	29M-60	2.20	30-60	1.20
65	26-60	.30	27-65	.75	28-60	.60		...	29M-65	2.40	30-65	1.20
66	26-60	.30	27-66	1.00	2-66	.75		...	29M-66	2.50	30-66	2.20
67	26-60	.30	27-66	1.00	2-66	.75		...	29M-67	2.75	30-200	2.20
68	26-60	.30	27-66	1.00	2-66	.75		...	29M-68	3.00	30-68	2.20
77		..	27-77	.50		..	29-77	1.00		...	30-77	.80
78	26-60	.30	27-78	.75		..	29-78	1.20		...	30-78	1.00
79	26-60	.30	27-85	.75		..	29-85	1.20		...	30-85	1.00
85	26-60	.30	27-85	.75		..	29-85	1.20	29M-85	2.00	30-85	1.00
99	26-155	.30	27-99	.90	28-99★	.60	29-99	1.20	29M-99	2.30	30-99	2.20
100	26-155	.30	27-200	.90	2-155	.50	29-100	1.20	29M-100	2.20	30-49	2.20
109	26-109	.30	• 27-109	.75	28-109	.50	29-109	1.20	29M-109	2.20	30-109†	1.20
110	26-155	.30	27-110	.75	28-110★	.60		...	29M-110	2.20	30-49	2.20
111	26-60	.30	27-111	1.00	2-111★	.60		...	29M-60	2.20	30-111	2.50
112	26-60	.30	27-111	1.00	2-111★	.60		...	29M-112	2.50	30-112	2.50
113	26-60	.30	27-113	1.25	2-113★	1.00		...	29M-113S	6.00	30-113	2.50
114	26-114	.50	27-114	1.50	2-114★	1.25		...	29M-114S	8.50	30-114	3.50
115	26-114	.50	27-115	2.50	28-115★	1.50		...	29M-115S	14.00	30-115	3.50
116A	26-116†	3.00	27-116	3.00	28-116★	2.00		...	29M-116AS	18.00	30-116A	4.50
116	26-116†	3.00	27-116	3.00	28-116★	2.00		...	29M-116S	20.00	30-116	4.50
117	26-117	3.50	27-117	4.00	2-117★	2.40		...	29M-117	50.00	30-117	5.50
118	26-117	3.50	27-117	4.00	2-117★	2.40		...	29M-118	60.00	30-118	5.50
130	26-60	.30	27-130	1.25	2-130	1.00		...	29M-130S	5.50	30-130	2.50
140	26-140	2.50	• 27-140	1.00	28-140★	.50	29-140	1.50	29M-140	3.00	30-200	2.20
145	26-140	2.50	• 27-140	1.00	28-140★	.50	29-145	1.50	29M-145	2.50	30-66	2.20
149	26-60	.30	27-149	1.25	2-49	1.00	29-49	1.80	29M-49	3.25	30-149	1.20
150	26-155	.30	27-200	.90	2-155	.50	29-150	1.20	29M-150	2.20	30-66	2.20
155	26-155	.30	27-155	.75	2-155	.50	29-200	1.20	29M-200	2.25	30-155	1.20
160	26-155	.30	27-155	.75	2-155	.50	29-150	1.20	29M-150	2.20	30-65	1.20
165	26-155	.30	27-155	.75	2-155	.50	29-150	1.20	29M-150	2.20	30-65	1.20
180	26-155	.30	27-155	.75	2-155	.50	29-100	1.20	29M-100	2.20	30-180†	1.20
185	26-155	.30	27-155	.75	2-155	.50	29-100	1.20	29M-100	2.20	30-180†	1.20
200	26-155	.30	27-200	.90	2-155	.50	29-200	1.20	29M-200	2.25	30-200	2.20
209	26-155	.30	• 27-209	1.25	28-209	.60	29-209	1.80	29M-209	2.50	30-66	2.20
250	26-155	.30	27-250	1.00	28-250	.60	29-250	1.20	29M-250	2.40	30-200	2.20
259	26-155	.30	27-259	1.00	28-110★	.60	29-250	1.20	29M-250	2.40	30-200	2.20
285	26-60	.30	27-285	.75		..	29-285	1.20	29M-60	2.20	30-60	1.20
350	26-155	.30	27-350	1.25	28-350	.75	29-350	1.50	29M-350	2.25	30-200	2.20
349	26-349	.30	27-349	1.50	28-349★	1.00		...	29M-349	7.00	30-349	3.00
349H	26-349	.30	27-349	1.50	28-349★	1.00		...	29M-349	7.00	30-349	3.00
500	26-155	.30	27-500	1.00	28-250	.60	29-500	1.50	29M-250	2.40	30-200	2.20

• STATE COLOR REQUIRED

PENN REEL PARTS No. 31 TO No. 35

SEE FOOTNOTES ON PAGE 28

Reel No.	No. 31 R. S. Stand Screw		No. 32 L. S. Stand Screw		No. 33 Rod Clamp		No. 34 Clamp Screw with Nuts		No. 35 Click Tongue	
	Part No.	Price Each	Part No.	Price Each	Part No.	Price Each	Part No.	Price Each	Part No.	Price Each
9	31-109	.03	31-109	.03	...	..	...	..	35-155	.10
25	31-155	.03	32-155	.03	...	..	...	..	35-155	.10
26	31-155	.03	32-155	.03	...	..	...	..	35-155	.10
27	31-155	.03	32-155	.03	...	..	...	..	35-155	.10
49	31-110	.03	31-110	.03	33-49	.30	34-49	.20	35-60	.10
60	31-60	.03	31-155	.03	...	..	...	..	35-60	.10
65	31-60	.03	31-155	.03	...	..	...	..	35-60	.10
66	31-60	.03	31-155	.03	33-200	.30	34-200	.20	35-60	.10
67	31-60	.03	31-155	.03	33-200	.30	34-200	.20	35-60	.10
68	31-60	.03	31-155	.03	33-200	.30	34-200	.20	35-60	.10
77	31-77	.03	31-77	.03	...	..	...	..	35-155	.10
78	31-149	.03	31-285	.03	...	..	...	..	35-60	.10
79	31-285	.03	32-155	.03	...	..	...	..	35-60	.10
85	31-285	.03	32-155	.03	...	..	...	..	35-60	.10
99	31-200	.03	32-110	.03	33-200	.30	34-200	.20	35-60	.10
100	31-200	.03	31-285	.03	33-49	.30	34-49	.20	35-155	.10
109	31-109	.03	31-109	.03	...	..	...	..	35-155	.10
110	31-110	.03	32-110	.03	33-49	.30	34-49	.20	35-60	.10
111	31-110	.03	32-110	.03	33-200	.30	34-49	.20	35-60	.10
112	31-110	.03	32-110	.03	33-200	.30	34-200	.20	35-60	.10
113	31-110	.03	32-110	.03	33-200	.30	34-200	.20	35-60	.10
114	31-114	.06	32-114	.06	33-114	.60	34-200	.20	35-114	.16
115	31-115	.06	32-115	.06	33-114	.60	34-200	.20	35-115	.16
116A	31-115	.06	32-115	.06	33-116	.80	34-116	.40	35-115	.16
116	31-115	.06	32-115	.06	33-116	.80	34-116	.40	35-115	.16
117	31-115	.06	31-115	.06	33-117	1.00	34-116	.40	35-115	.16
118	31-115	.06	31-115	.06	33-117	1.00	34-116	.40	35-115	.16
130	31-155	.03	31-285	.03	33-200	.30	34-49	.20	35-60	.10
140	31-200	.03	31-110	.03	33-200	.30	34-200	.20	35-155	.10
145	31-200	.03	31-110	.03	33-200	.30	34-200	.20	35-155	.10
149	31-149	.03	31-149	.03	...	..	...	..	35-60	.10
150	31-200	.03	31-285	.03	33-200	.30	34-200	.20	35-155	.10
155	31-155	.03	32-155	.03	...	..	...	..	35-155	.10
160	31-155	.03	32-155	.03	...	..	...	..	35-155	.10
165	31-155	.03	32-155	.03	...	..	...	..	35-155	.10
180	31-285	.03	32-155	.03	...	..	...	..	35-155	.10
185	31-285	.03	32-155	.03	...	..	...	..	35-155	.10
190	31-285	.03	32-155	.03	...	..	...	..	35-155	.10
200	31-200	.03	31-285	.03	33-200	.30	34-200	.20	35-155	.10
209	31-285	.03	31-155	.03	33-200	.30	34-200	.20	35-60	.10
249	31-149	.03	31-149	.03	...	..	...	..	35-60	.10
250	31-200	.03	31-285	.03	33-200	.30	34-200	.20	35-60	.10
259	31-110	.03	32-110	.03	33-200	.30	34-200	.20	35-60	.10
285	31-285	.03	32-155	.03	...	..	...	..	35-60	.10
350	31-285	.03	32-155	.03	33-200	.30	34-200	.20	35-155	.10
349	31-349	.03	31-349	.03	33-49	.30	34-49	.20	35-114	.16
349H	31-349	.03	31-349	.03	33-49	.30	34-49	.20	35-114	.16
500	31-200	.03	31-285	.03	33-200	.30	34-200	.20	35-60	.10

PENN REEL PARTS No. 36 TO No. 41

SEE FOOTNOTES ON PAGE 28

Reel No.	No. 36 Click Button		No. 37 Frame Post		No. 38 R. S. Post Screw		No. 39 L. S. Post Screw		No. 40 Left Side Bearing		No. 41 Bearing Spring	
	Part No.	Price Each	Part No.	Price Each	Part No.	Price Each	Part No.	Price Each	Part No.	Price Each	Part No.	Price Each
9	36-60	.10	37-109	.20	38-109	.03	38-109	.03	40-109	.40	41-109	.10
25	36-155	.10	37-155	.20	31-60	.03	31-155	.03	40-60	.40	41-60	.10
26	36-155	.10	37-160	.20	31-60	.03	31-155	.03	40-60	.40	41-60	.10
27	36-155	.10	37-180	.20	31-60	.03	31-155	.03	40-60	.40	41-60	.10
49	36-60	.10	37-49	.20	38-49	.03	38-49	.03	40-60	.40	41-60	.10
60	36-209	.10	37-60	.20	38-60	.03	31-60	.03	40-60	.40	41-60	.10
65	36-209	.10	37-65	.20	38-60	.03	31-60	.03	40-60	.40	41-60	.10
66	36-60	.10	37-65	.20	38-60	.03	31-60	.03	40-60	.40	41-60	.10
67	36-60	.10	37-67	.20	38-60	.03	31-60	.03	40-60	.40	41-60	.10
68	36-60	.10	37-68	.20	38-60	.03	31-60	.03	40-60	.40	41-60	.10
77	36-155	.10	37-77	.15	31-77	.03	31-77	.03	40-85	.25	41-60	.10
78	36-60	.10	37-180	.20	31-60	.03	31-60	.03	40-85	.25	41-60	.10
79	36-60	.10	37-60	.20	31-60	.03	31-155	.03	40-85	.25	41-60	.10
85	36-60	.10	37-60	.20	31-60	.03	31-155	.03	40-85	.25	41-60	.10
99	36-60	.10	37-65	.20	38-200	.03	31-110	.03	40-60	.40	41-60	.10
100	36-60	.10	37-180	.20	38-200	.03	31-60	.03	40-60	.40	41-60	.10
109	36-109	.10	37-109	.20	38-109	.03	38-109	.03	40-109	.40	41-109	.10
110	36-60	.10	37-180	.20	38-110	.03	31-110	.03	40-60	.40	41-60	.10
111	36-60	.10	37-60	.20	38-110	.03	31-110	.03	40-60	.40	41-60	.10
112	36-60	.10	37-67	.20	38-110	.03	31-110	.03	40-60	.40	41-60	.10
113	36-60	.10	37-67	.20	38-110	.03	31-110	.03	40-60	.40	41-60	.10
114	36-114	.16	37-114	.30	38-114	.06	31-115	.06	40-114	.60	41-114	.16
115	36-115	.16	37-115	.40	38-114	.06	31-115	.06	40-114	.60	41-114	.16
116A	36-115	.16	37-116A	.40	38-114	.06	38-114	.06	26-116	3.00		..
116	36-115	.16	37-116	.50	38-114	.06	38-114	.06	26-116	3.00		..
117	36-117	.16	37-116	.50	38-114	.06	38-114	.06	26-117	3.50		..
118	36-117	.16	37-118	.60	38-114	.06	38-114	.06	26-117	3.50		..
130	36-60	.10	37-130	.20	31-60	.03	31-60	.03	40-60	.40	41-60	.10
140	36-155	.10	37-67	.20	38-200	.03	38-110	.03	40-140	3.00		..
145	36-155	.10	37-160	.20	38-200	.03	38-110	.03	40-140	3.00		..
149	36-60	.10	37-49	.20	38-60	.03	38-60	.03	40-60	.40	41-60	.10
150	36-60	.10	37-160	.20	38-200	.03	31-60	.03	40-60	.40	41-60	.10
155	36-155	.10	37-155	.20	31-60	.03	31-155	.03	40-60	.40	41-60	.10
160	36-155	.10	37-160	.20	31-60	.03	31-155	.03	40-60	.40	41-60	.10
165	36-155	.10	37-160	.20	31-60	.03	31-155	.03	40-60	.40	41-60	.10
180	36-155	.10	37-180	.20	31-60	.03	31-155	.03	40-60	.40	41-60	.10
185	36-155	.10	37-180	.20	31-60	.03	31-155	.03	40-60	.40	41-60	.10
190	36-155	.10	37-180	.20	31-60	.03	31-155	.03	40-85	.25	41-60	.10
200	36-60	.10	37-155	.20	38-200	.03	31-60	.03	40-60	.40	41-60	.10
209	36-209	.10	37-209	.20	31-60	.03	31-60	.03	40-60	.40	41-60	.10
249	36-60	.10	37-49	.20	38-60	.03	38-60	.03	40-85	.25	41-60	.10
250	36-60	.10	37-155	.20	38-200	.03	31-60	.03	40-60	.40	41-60	.10
259	36-60	.10	37-155	.20	38-110	.03	31-110	.03	40-60	.40	41-60	.10
285	36-60	.10	37-60	.20	31-60	.03	31-155	.03	40-60	.40	41-60	.10
350	36-155	.10	37-155	.20	31-60	.03	31-155	.03	40-60	.40	41-60	.10
349	36-114	.16	37-49	.20	38-49	.03	38-49	.03	40-349	.40	41-60	.10
349H	36-114	.16	37-49	.20	38-49	.03	38-49	.03	40-349	.40	41-60	.10
500	36-60	.10	37-155	.20	38-200	.03	31-60	.03	40-60	.40	41-60	.10

PENN REEL PARTS No. 42 TO No. 79

ILLUSTRATION OF PARTS ON PAGE 18.

Reel No.	No. 42 Worm		No. 43 R. S. Worm Bearing		No. 44 L. S. Worm Bearing		No. 44A L. S. Worm Bearing Spring		No. 45 Worm Gear	
	Part No.	Price	Part No.	Price	Part No.	Price	Part No.	Price	Part No.	Price
9 109 209	42-109	.40	43-9	.30	43-109	.30	44A-109	.10	45-9	.30
	42-109	.40	43-109	.30	44-109	.30	44A-109	.10	45-109	.30
	42-209	.50	44-109	.30	43-109	.30	44A-109	.10	45-209	.30
No. 46 Line Guide	No. 46C Level-wind Complete		No. 47 Pawl		No. 48 Pawl Cover Screw		No. 50 Worm Shield		No. 37S Slotted Line Guide Post	
	Part No.	Price	Part No.	Price	Part No.	Price	Part No.	Price	Part No.	Price
46-9 46-109 46-209	46C-9	1.10	47-109	.10	48-109	.10	50-109	.30	37S-109	.30
	46C-109	1.10	47-109	.10	48-109	.10	50-109	.30	37S-109	.30
	46C-209	1.20	47-109	.10	48-109	.10	50-209	.40	37S-209	.40

Reel No.	No. 60 Complete Frame		No. 62 Click Spring		No. 63 Click Spring Screw with Lock Washer		No. 64 Fibre Idler Gear		No. 65 Idler Gear Screw	
	Part No.	Each Price	Part No.	Each Price	Part No.	Each Price	Part No.	Each Price	Part No.	Each Price
9 209	60-209	2.50	62-209	.20	63-209	.05	64-9	.40	65-209	.10
	60-209	2.50	62-209	.20	63-209	.05	64-209	.40	65-209	.10
	60-209	2.50	62-209	.20	63-209	.05	64-209	.40	65-209	.10

Reel No.	No. 66 Level-wind Drive Gear (Spool)		No. 67 Level-wind Drive Gear Lock Spring		No. 68 Level-wind Drive Gear Lock Spring		No. 69 Level-wind Drive Gear Lock Spring		No. 70 Level-wind Drive Gear Lock Spring	
	Part No.	Each Price	Part No.	Each Price	Part No.	Each Price	Part No.	Each Price	Part No.	Each Price
66-9 66-209	66-9	.30	67-9	.02	68-9	.02	69-9	.02	70-9	.02
	66-209	.30	67-209	.02	68-209	.02	69-209	.02	70-209	.02
	66-209	.30	67-209	.02	68-209	.02	69-209	.02	70-209	.02

PARTS below for 350 Leveline reel ONLY.

Reel No.	No. 70 Spiral Bar		No. 71 RS Spiral Bearing		No. 72 LS Spiral Bearing		No. 73 Spiral Gear		No. 74 Cam Gear	
	Part No.	Each Price	Part No.	Each Price	Part No.	Each Price	Part No.	Each Price	Part No.	Each Price
350	70-350	2.75	43-109	.30	72-350	.50	73-350	.50	74-350	.60
	70-350	2.75	43-109	.30	72-350	.50	73-350	.50	74-350	.60
	70-350	2.75	43-109	.30	72-350	.50	73-350	.50	74-350	.60
Reel No.	No. 75 Cam Gear Screw		No. 76 Spiral Drive Dog		No. 77 Spiral Drive Dog Spring		No. 78 Spiral Gear Dog		No. 79 Spiral Gear Dog Spring	
	Part No.	Each Price	Part No.	Each Price	Part No.	Each Price	Part No.	Each Price	Part No.	Each Price
75-350	75-350	.10	76-350	.30	14-109	.03	78-350	.10	14-99	.03
	75-350	.10	76-350	.30	14-109	.03	78-350	.10	14-99	.03
	75-350	.10	76-350	.30	14-109	.03	78-350	.10	14-99	.03

EXPLANATORY FOOTNOTES FOR PARTS LIST PGS. 20 TO 28

- # For convertible drag reel, add letter C to part number.
 Right side ring for all Take-Apart reels are only sold as one unit, due to construction.
- ♣ Spacing Sleeve Assembly consisting of Spacing Sleeve, Cover Plate, and Felt Washer.
 ♡ Specify whether you need leather or fibre washers.
- ▤ For old style reels, specify Spacing Sleeve, Cover Plate and Felt Washers. Details on construction of Penn Reels on Pages 29 and 30.
- ◇ If you need a flat spring, please specify.
- Old style reels contained Part No. 11-66.
- † For Convertible Lever, order Part No. 21S.
- For Convertible Lever Eccentric, mark letter (C) after part number.
- ‡ For Convertible Lever Eccentric Spring, order Part No. 20-155.
- △ NOTE: For convertible eccentric lever screw, use Part No. 22-109.
- ★ For double rings, add letter O or I to part number, for outside or inside rings, respectively.
- ☐ Prices shown are for cast spools. For spun spool prices, inquire from factory.
- ‡ For reel stands, to fit Baitcasting rods with offset reel seat, order by part number listed in column No. 30. For long reel stands, to fit salt or fresh water rods with straight reel seat, add letter (S) after part number listed in column No. 30.
- ♣ NOTE: On Reels Nos. 111-2/0 and 112-3/0 for "covered right and left side screws," use letter (C) after part number.
- Left Hand reels require left hand parts. When ordering parts for these reels, mark letters (LH) after part number.
- ✦ Prices shown are for ball-bearings. For old-style friction bearings, add letter C.
- For drag washer with large hole, add letter "A" after part number.

PENN REEL HANDLES

PENN REEL HANDLES are interchangeable. For OVERSIZE handle (longer than standard size) use the next larger size.

Length of handles:

Handle #24-109—length 2 $\frac{7}{8}$ "
Handle #24-180—length 3"
Handle #24-160—length 3 $\frac{1}{2}$ "
Handle #24-155—length 4"
Handle #24-66 —length 4 $\frac{5}{8}$ "
Handle #24-49 —length 5"

When replacing handle screw, be sure to TIGHTEN handle screw before inserting small lock screw. See page 17 for 3-in-1 handles.

HOW TO ORDER PARTS

1. Order by part number only.
2. Advise us of reel model number for which parts are intended.
3. Remit check, money order or stamps, to cover parts cost and postage charges.
4. If shipmen' is to be sent C. O. D., please indicate: "Ship C. O. D."
5. Because of cost of handling an order, minimum charge of parts order is 50 cents.
6. Print your name nad address clearly, to avoid delay.


PENN FISHING TACKLE MFG. CO.
3028 W. HUNTING PARK AVE.
PHILADELPHIA 32, PA.

CONSTRUCTION OF PENN FISHING REELS

OPERATION OF FREE-SPOOL CLUTCH

The Free-Spool Clutch is employed to either engage, or disengage gears. The free-spool snap lever is conveniently located on right plate rim and enables the angler to throw the reel into free spool, or engagement, at will. Setting the clutch in operation can always be done without danger of stripping gears, as these are always in mesh.

Operation: 1. Free spool lever (A) operates jack (D) through eccentric (B)
2. Eccentric jack (D) actuates yoke (E)
3. Yoke (E) engages or disengages pinion gear with spool

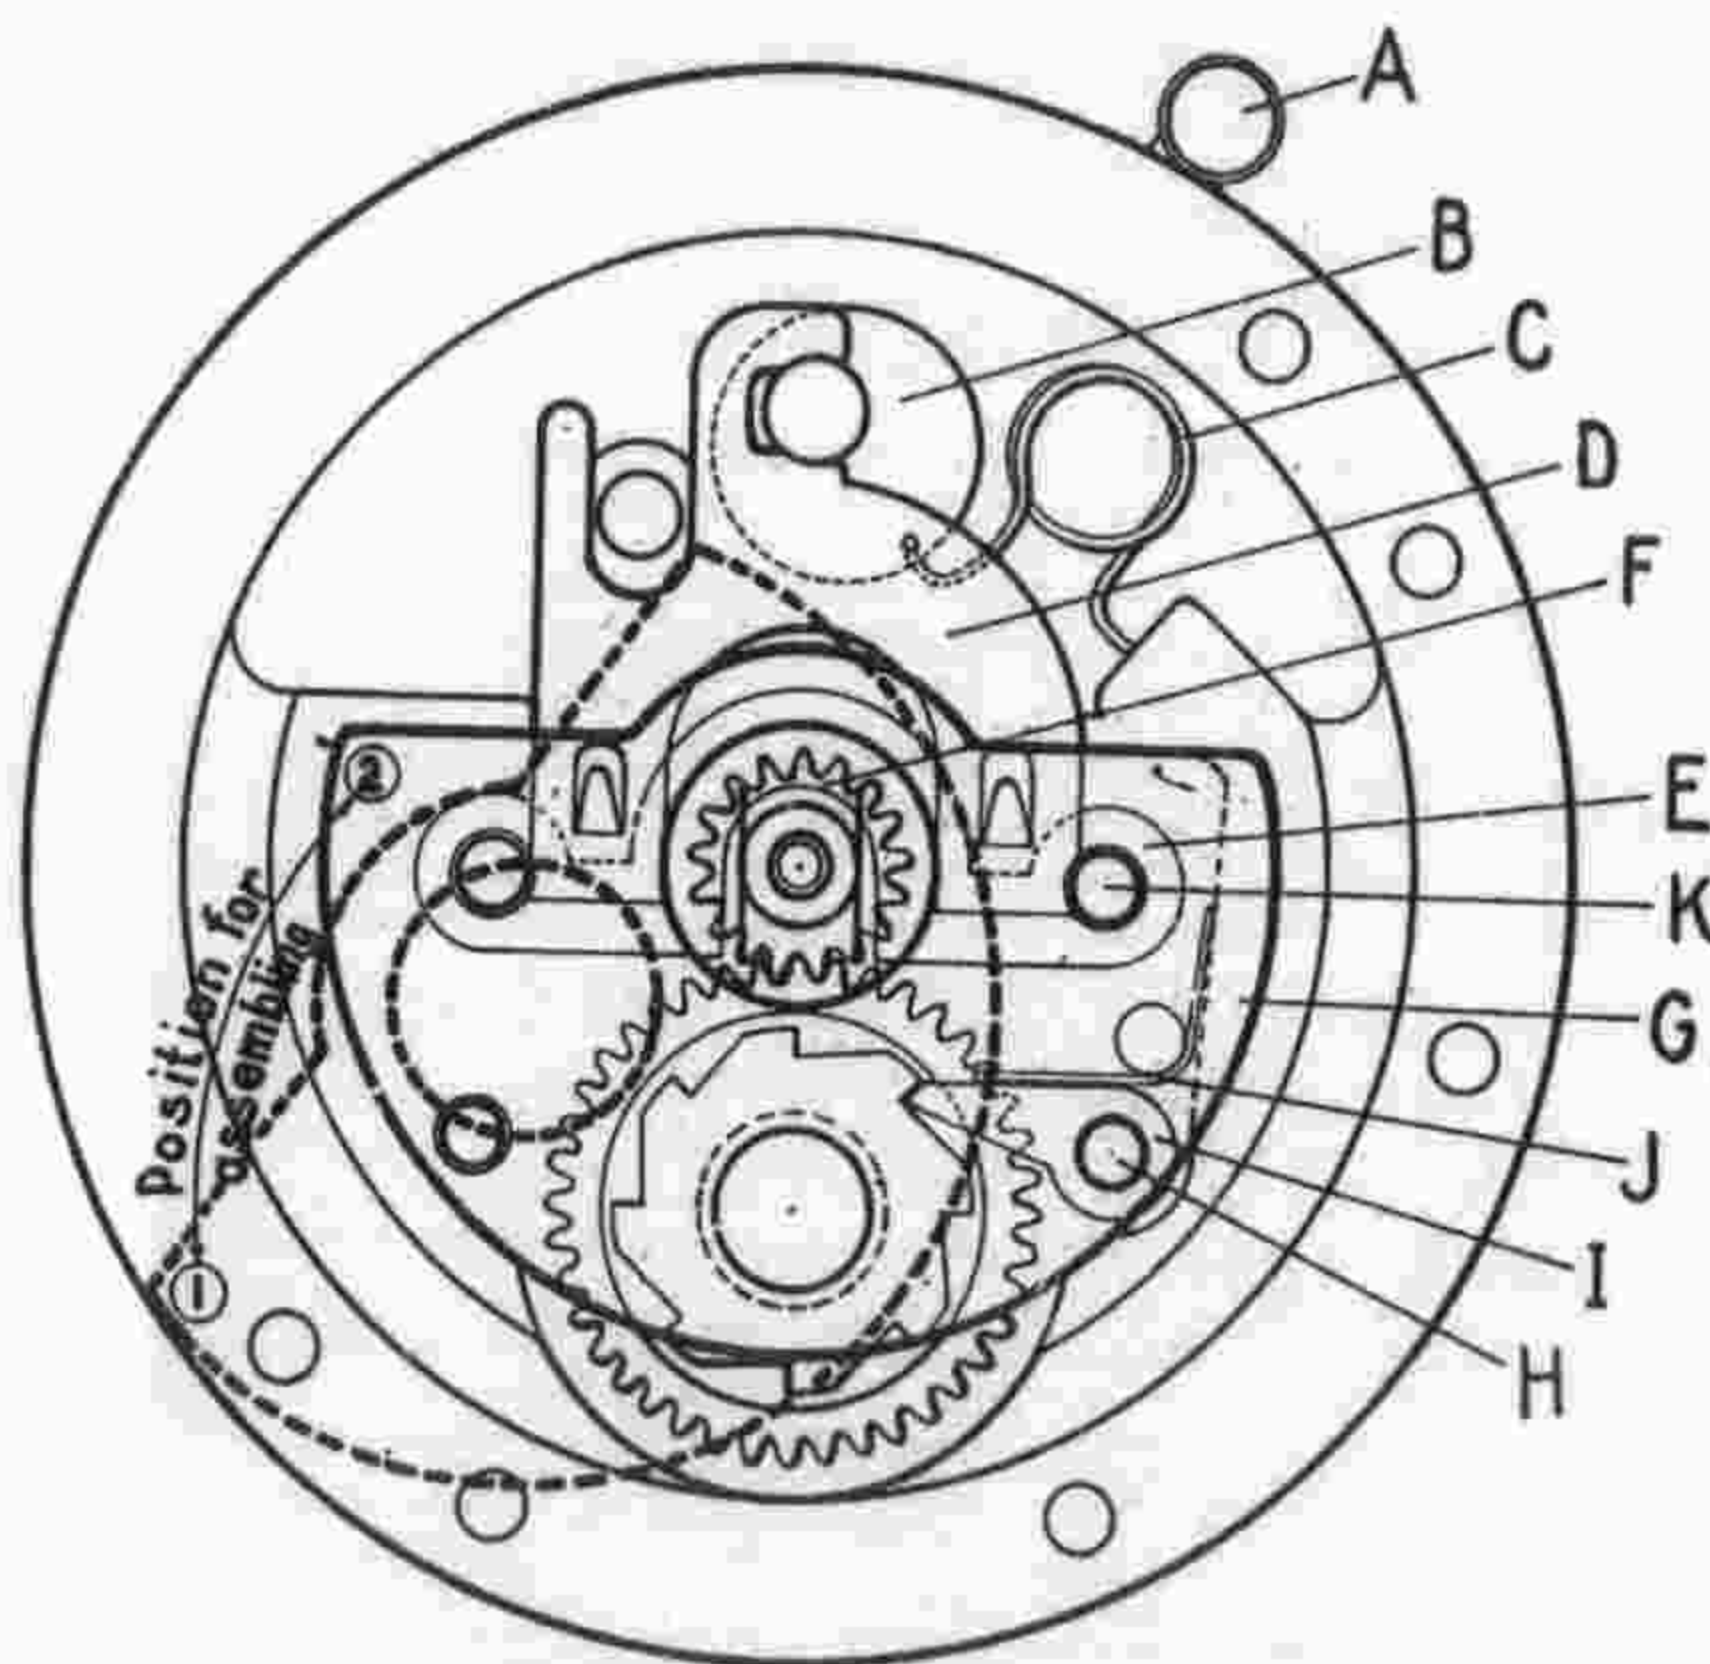

ASSEMBLING CLUTCH

(All Penn Models except 130 and 349 series)

1. After assembling star-drag mechanism, place gear bridge (G) in position (1). Insert long threaded screw from front to hold dog (I).
2. Replace dog (I) and dog spring (J). To do this, grip end plate with your left hand, and with left thumb press gear bridge (G) against plate, having gear bridge turned toward the left (position 1) far enough to allow the dog and spring to be placed into position. After inserting the dog and spring, rotate (without releasing thumb pressure) the gear bridge to the right (position 2) so that the remaining gear bridge screw (H Long Threaded) may be screwed into gear bridge, followed by the two clutch yoke guide screws (K Short Threaded).

CONVERTIBLE STAR-DRAG (On Penn models 140, 145, 49 and 349C)

The convertible drag lever allows letting out and retrieving line while the reel is still in gear, also full handle control for hooking fish. But the foremost reason for its existence is the control a fisherman has when playing a lunker directly through the handle. Every tug, every flip of the tail of the fish is transmitted to the thumb and index finger of the angler, and it's really give and take at both ends until the contest is decided. Should it thereafter be desired to use the reel as an ordinary star-drag the change can be effected by simply flipping the convertible drag lever downward. For the angler who likes to have his reel in gear at all times and enjoys fighting his fish all the way directly through the reel handle, the convertible drag feature is highly recommended.

A WORD OF CAUTION ABOUT FISHING WITH MONOFILAMENT and other synthetic fishing lines.

Nylon, monofilament and dacron fishing lines, when wound upon a reel spool under tension, build up terrific pressure. This may make the spool bind or damage your reel. We suggest that you observe the following precautions:

1. Use backing of at least five layers of linen line on the spool hub before putting on synthetic line. Be sure to secure the end of the backing line to the spool hub.
2. Retrieve line in a criss-cross fashion (not one turn tightly against the next). Toward the end of the retrieve, pyramid line in center of your reel spool, keeping pressure away from spool flanges.
3. Retrieve line when it is not under greatest tension. Pump your fish with your rod, reel in line at the end of the down stroke. Try not to winch your fish with your reel.
4. At the end of the day's fishing, remove line from reel to release pressure and rewind line without tension.

Observance of these precautions will assure you of trouble-free fishing. Because of the pressure developed by synthetic lines, we cannot guarantee spools against breakage.

DRAG COMPONENTS ARE LISTED IN SEQUENCE IN WHICH THEY ARE PLACED ON GEAR SLEEVE, #1 BEING AT BOTTOM, NEAREST THE MAIN GEAR

Models: 9-25-26-27 60-65-85-99-100-109 110-140-145-149-150 155-160-180-200-209 250-259-285-350-500		Models: 111-112 66-67-68	Model: 130	Model: 113	Models: 114-115	Model: 49	Model: 349	Models: 116A-116 117-118
13		Spring*						Spring*
12		Spacer*						Cover Plate*
11		Spring						Spring*
10		Met. Slot	Met. Slot		Spring		Spring*	Met. Slot
9		Fibre	Fibre	Spring	Spacer*		Spring*	Brk. Lng.
8	Spacer*	Met Lip	Met. Lip	Spacing	Chrome Disc*		Spacing	Met. Lip
7				Sleeve			Sleeve*	
6	Spring		Fibre	Spring	Felt*	Spring	Chrome Disc*	Brk. Lng.
	Met. Slot	Met. Slot	Met. Slot	Met. Slot	Met. Slot	Met. Slot	Met. Slot	Met. Slot
5						Heavy		
4	Leather	Leather	Leather	Fibre	Brk. Lng.	Fibre	Brk. Lng.	Brk. Lng.
3	Met. Lip	Met. Lip	Met Lip	Met. Lip	Met. Lip	Met. Lip	Met. Lip	Met. Lip
2	Leather	Fibre	Fibre	Brk. Lng.	Brk. Lng.	Leather	Brk. Lng.	Brk. Lng.
1	Met. Slot	Met. Slot	Met. Slot	Met. Slot	Met. Slot	Met. Slot	Met. Slot	Met. Slot
	Leather	Leather	Leather	Brk. Lng.	Brk. Lng.	Leather	Brk. Lng.	Brk. Lng. (Big Hole)

Met. Slot = Metal Slotted Washer
Met. Lip = Metal Lipped Washer

Brk. Lng. = Brake Lining Washer
Spring = Spring Washer


NOTE: Components with * are inserted from outside of plate.

116-116A same but without big hole. No cover plate or spring.

OPERATION OF STAR-DRAG


The star-drag is a braking mechanism, which controls the rotation of the reel spool. It is controlled by a star wheel, which increases or decreases the pressure between the drag washers. This puts varying degrees of tension, depending on the setting of the star wheel, on the fisherman's line. With little pressure between the drag washers, and therefore light tension, a fish can pull the fisherman's line from the reel with little effort. Increasing the tension applies greater braking action on the spool and makes it increasingly harder for a fish to take out line. Care should be exercised not to put more drag on the reel than the line or rod can safely withstand. The drag tension should be set so as to tire out a fighting fish and slowly wear him down, rather than to stop his run entirely. To check the amount of drag you have on your reel, put it in gear and test drag tension by pulling line from the spool. Adjustment of the drag is effected by turning the star wheel clockwise to tighten, anti-clockwise to loosen.

Caution: When putting reels away during the "off season" period, always back off the drag star completely, releasing all tension on the friction washers. With the spool in mesh, pull on the line (as if you were testing line tension) to make sure that the drag assembly is really free. Putting a reel away in damp atmospheres, with the drag star tightened, may result in all the friction washers sticking to the metal discs.

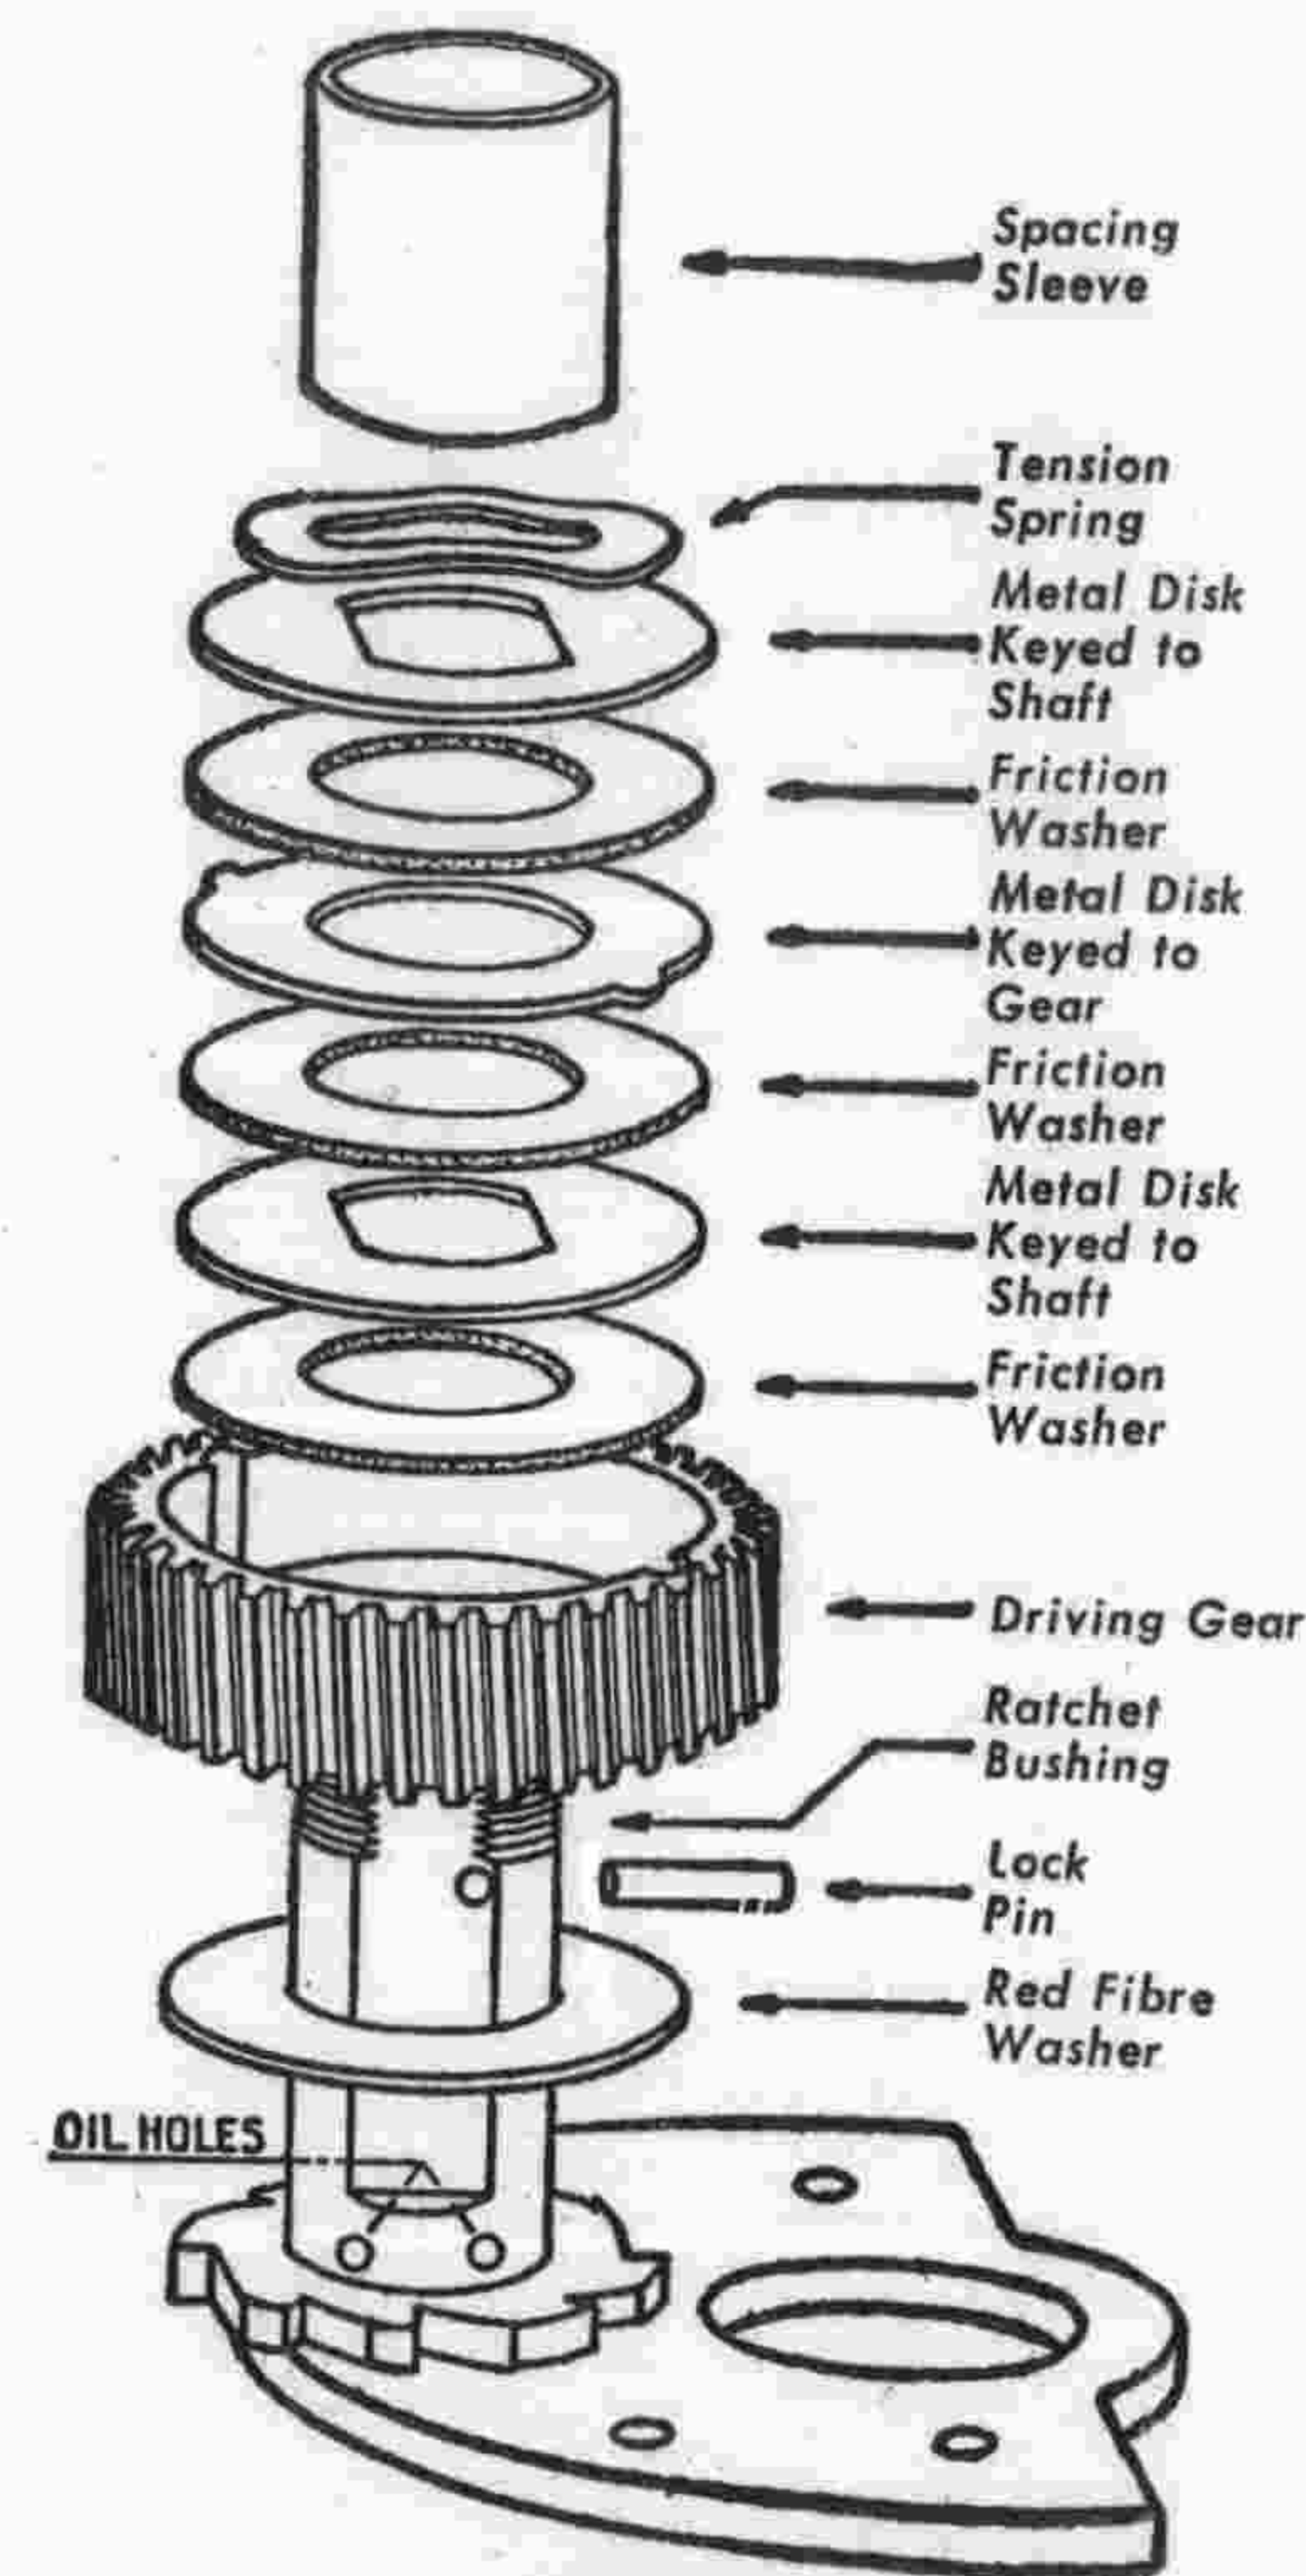

**TYPICAL PENN
DRAG ASSEMBLY**

Care of your reel

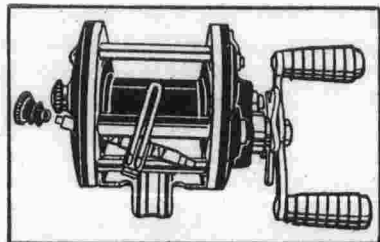


HOW TO REPLACE LEVEL-WIND WORM AND PAWL

1. On model 109 reel, unscrew worm bearing from left side plate and remove level-wind assembly as shown in illustration. Replace worm with flat end going into right side plate (handle side).

2. On models 9 and 209 reels, remove worm bearing from right side plate and follow same procedure as above. Replace worm with flat end going into left side plate.

3. To replace pawl in models 9, 109 and 209 reels, unscrew pawl retainer screw in line guide carriage. Remove old pawl and drop in new, knife edge down. Be sure knife edge fits into groove of worm. Back of pawl should be flush with line guide carriage. Replace pawl retainer screw.

Put a drop of Penn Lube in each worm bearing. Replace level-wind assembly as shown. Replace bearing. Lubricate worm freely.

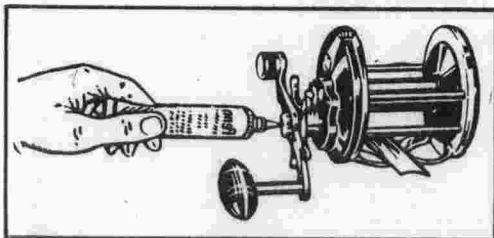


LUBRICATING PENN REELS

Oil spool bearings, handle nut, free spool lever, handle knob and base of sleeve, click button, driving gears through nipple (marked Grease) on front plate. Keep your reel well oiled

to prevent the inroads of salt water—and remember—one drop of oil in the right place is worth more than two alongside.

CLEANING THE REEL

Should sand get into your reel, or should you wish to clean the reel, take it apart, and wash the parts with a mixture of 2/3 kerosene and 1/3 light lubricating oil; or one of the commercial solvents on the market for cleaning purposes. Our "Take-Apart" reels can easily be taken apart. On all other models remove the plate screws, and the reel will come apart. For reassembling, see instructions on page 29.

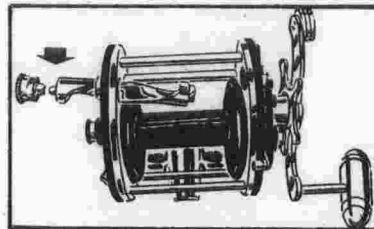

HOW TO REPLACE LEVELINE SPIRAL BAR

1. Back off knurled spiral bar bearing on left side plate.

2. Push the spiral bar through opening in left side plate. The spiral gear may come out of right side plate with spiral bar, but may not go through the opening in left side plate. Remove gear from spiral bar and bar from reel.

3. Push new spiral bar through hole in left side plate and place spiral gear onto flattened end of bar. When installed correctly, gear fits flush with flattened end of spiral bar.

4. Holding spiral bar lightly between thumb and index finger, rotate it anti-clockwise and at the same time turn reel handle slowly, in order for the gear to engage the two spiral dogs. Do not use force. Turn handle to test action.

5. Replace knurled spiral bar bearing. Bar should have slight sideplay and move freely when handle is turned.

WHEN PENN REELS NEED SERVICE

Your Penn reel is a fine, precision-made mechanism, and, with reasonable care, should give many years of satisfactory performance. However, should you wish to have your Penn Reel reconditioned, take it to your local Authorized Penn Reel Sales and Service Dealer, who displays the Penn Service decal, shown on page 32. If you are gifted with mechanical aptitude, you may wish to service your reel yourself. Replacement parts and their costs are listed on Pages 17 to 28, so you can order by number of part. Construction and service diagrams are shown on Pages 29 and 30.

If local service is not available, you may send your Penn Reel to our Factory Repair Department, Parcel Post Insured. Attach a letter to the outside of the package, stating what repairs are needed. We will service your reel, replace all worn or broken parts, at nominal cost.

When the repairs have been completed, you will be notified of the cost. You can then remit the amount or request the return of your reel via Parcel Post, C.O.D.

NOTE: Best time to send your reel to the factory for overhauling is during Fall and Winter months.

Print your name and address clearly on your package to avoid loss.

PENN FISHING TACKLE MFG. CO., Philadelphia 32, Pa.

**PATRONIZE YOUR LOCAL
SPORTING GOODS DEALER**



A SIGN OF GOOD SERVICE!