



QUICK MOUNT™ JR. 632

QUICK MOUNT™ SR. 634

MOUNTING HARDWARE CONTAINS:

- 4 Oval Head Screws (1/4" - 20 x 1 1/4") #209-620
- 4 Pan Head Bolts (1/4" - 20 x 1 1/2") #250-634
- 4 Plastic Insulating Washers #205-600
- 4 Metal Washers #220-600
- 4 Lock Nuts #208-600

NOTE: BE SURE THAT THE BOAT'S ROD HOLDER IS SECURELY MOUNTED.


RECOMMENDATIONS AND TIPS

1. The plastic insulating washers furnished with the mounting hardware must be used to prevent corrosion between the metal washers/self-lock nuts and the underside of the aluminum plate.



2. The Penn Quick-Mount™ Jr. and Sr. models are designed so that the Fathom-Masters™ can only be used with their booms facing directly astern.

If the flush mount rod holder is situated so that the boom faces a slight angle off the stern, you can still use the Quick-Mount™ in that rod holder.

However, the Quick-Mount™ is definitely not recommended with the boom going off the boat's side (outrigger style), since the flush mount rod holder's gimbal pin may shear off. See illustration.



The flush mount rod holder can be located either on the transom or gunwale, as long as there is adequate boom clearance and, we emphasize again, the boom faces directly (or near directly) astern. See illustration.



If you own a 600 or 800 model Fathom-Master™ and need more boom clearance you can purchase an extension boom kit (#638) from your dealer. You may also need an Adjustable Swivelmatic™ base (820ASM) for easier access to the trolling weight.



3. Penn's Quick-Mounts™ are manufactured for a precision fit into standard sizes of popular flush mount rod holders. If you have difficulty inserting and removing your Quick-Mount™, your flush mount rod holder tube may be bent. A bent rod holder tube may not be evident, even if you have been holding a rod and reel in it, since a rod butt has plenty of clearance in the holder.

4. Although your Quick-Mount™ will be taking up a flush mount rod holder, you can regain the use of a rod holder by adding one to your Fathom-Master™. Model 610RH is for the manual downriggers (600-620). Model 810RH is for the electric downriggers (800-820). A dual rod holder (815DRH) is also available for the electric downriggers (800 and 820).

5. It is recommended that a safety cord be secured to the downrigger while trolling, especially in heavy seas. Be sure that the cord is strong enough (at least 3/16" diameter).


6. Remove the trolling weight before pulling the downrigger and Quick-Mount™ out of the flush mount rod holder.

Quick-Mounts™ will also allow you to install a custom-made portable bait or fish cleaning board on your craft. Select a piece of teak or another durable wood fitted to the dimensions you desire. You can attach your Quick-Mount™ to a board with wood or sheet metal screws, as shown in illustration.





Fixed Base Plate (133-600) Installation For 800 & 600 Downriggers

Note: When mounting fixed base plate (133-600) to your Quick-Mount, use the oval holes.

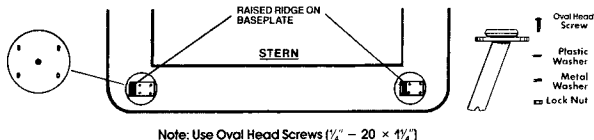

Swivel Base (820 ASM) Installation For 820 & 620 Downriggers

Note: When mounting adjustable swivel base (820 ASM) to your Quick-Mount, use the circular holes.

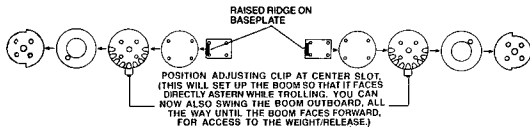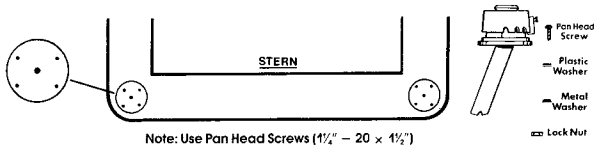

LIMITED WARRANTY

Penn Fishing Tackle Mfg. Co. warrants your Quick Mount™ to be free from defects in materials and workmanship for a period of one year from the date of purchase. This warranty does not cover damage or malfunctions caused by accident, abuse or normal expected wear. If your Quick Mount™ has a defect within the terms of the warranty, you should return it to us insured at either address indicated below, and we will repair or replace your Quick Mount™, at our option, without further cost to you. If, however, we determine after inspection that the repair is not covered by the provisions of this warranty, the Quick Mount™ will be repaired and returned to you at a reasonable charge for labor, parts and return postage. Proof of purchase required for warranty claims.

ALL WARRANTIES WHICH MAY BE IMPLIED BY OPERATION OF LAW, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY AND WARRANTIES OF FITNESS FOR ANY PARTICULAR PURPOSE, SHALL BE LIMITED TO ONE YEAR FROM THE DATE OF PURCHASE. IN NO EVENT SHALL PENN FISHING TACKLE MFG. CO. BE LIABLE FOR CONSEQUENTIAL OR SPECIAL DAMAGES FOR BREACH OF THIS WARRANTY OR ANY OTHER WARRANTY WHICH MAY BE IMPLIED BY LAW.

SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, AND SOME STATES DO NOT ALLOW THE EXCLUSION OF CONSEQUENTIAL OR SPECIAL DAMAGES, SO THE ABOVE LIMITATIONS AND/OR EXCLUSION MAY NOT APPLY TO YOU.

THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

Made and printed in U.S.A. Fathom Master™ and Swivel Matic™ are registered names of Penn Fishing Tackle Mfg. Co. Penn Fishing Tackle Mfg. Co. reserves the right to discontinue models and make changes in design specifications without notice.

Penn's policy of ongoing research and product development may necessitate design changes to bring you product performance improvement.